

STATE OF INDIANA
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF WATER

BULLETIN NO. 34

HYDROGEOLOGY OF THE
PRINCIPAL AQUIFERS IN VIGO
AND CLAY COUNTIES, INDIANA



Prepared by the
GEOLOGICAL SURVEY
UNITED STATES DEPARTMENT OF THE INTERIOR
in cooperation with the
DIVISION OF WATER
DEPARTMENT OF NATURAL RESOURCES

1971

STATE OF INDIANA
DEPARTMENT OF NATURAL RESOURCES

BULLETIN NO. 34
OF THE
DIVISION OF WATER
Robert F. Jackson, Chief

HYDROGEOLOGY OF THE PRINCIPAL AQUIFERS
IN VIGO AND CLAY COUNTIES, INDIANA

BY
L. W. Cable, F. A. Watkins, Jr., and
T. M. Robison

Prepared by the
GEOLOGICAL SURVEY
UNITED STATES DEPARTMENT OF THE INTERIOR
In cooperation with the
DIVISION OF WATER
DEPARTMENT OF NATURAL RESOURCES

1971

CONTENTS

	Page
Abstract.....	1
Introduction.....	1
Purpose and scope.....	1
Previous investigations.....	2
Cooperation and Acknowledgments.....	2
Geography.....	2
Physiography and climate.....	2
Hydrogeology.....	4
Consolidated rocks as sources of water.....	5
Mississippian System.....	7
Pennsylvanian System.....	7
Mansfield Formation.....	7
Brazil and Staunton Formations.....	11
Linton Formation.....	11
Petersburg Formation.....	11
Dugger Formation.....	15
Shelburn Formation.....	15
Patoka Formation (of local usage).....	15
Bedrock topography.....	18
Unconsolidated rocks as sources of water.....	18
Quality of water.....	23
Hardness	23
Bicarbonate.....	23
Sulfate.....	28
Fluoride.....	28
Chloride.....	28
Summary and conclusions.....	31
Glossary.....	32
Literature cited.....	33

ILLUSTRATIONS

(Plates in pocket)

	Page
Plate 1. Bedrock geologic map of Vigo and Clay Counties, Indiana.....	..
2. Map of Vigo and Clay Counties showing topography of land surface.....	..
2. 3. Map of Vigo and Clay Counties showing topography of bedrock surface.....	..
3. 4. Surficial geologic map of Vigo and Clay Counties.....	..
4. 5. Map of Vigo and Clay Counties showing principal unconsolidated rock aquifers and piezometric surfaces.....	..

	Page
Figure 1. Map showing the location of Vigo and Clay counties.....	3
2. Hydrograph of observation well Vigo 5 and precipitation at Terre Haute showing the amount of water-level fluctuations to be expected as a result of seasonal variations in recharge.....	8
3. Yields from wells in which the casing record indicated that the source of water was restricted to a single bedrock aquifer.....	9
4. Map showing the thickness and surface configuration of unit 1.....	10
5. Map showing the thickness and surface configuration of unit 2.....	12
6. Map showing the thickness and surface configuration of unit 3.....	13
7. Map showing the thickness and surface configuration of unit 4.....	14
8. Map showing the thickness and surface configuration of unit 5.....	16
9. Map showing the thickness and surface configuration of unit 6.....	17
10. Map of Vigo County showing saturated thickness in the unconfined area of the Wabash River valley aquifer.....	19
11. Cross section of the Wabash River valley (pl. 5) showing the relationship of the confined and unconfined areas of the aquifer.	20
12. Hydrographs of observation wells in the Wabash River valley and precipitation at Terre Haute showing the amount of water-level fluctuation to be expected as a result of seasonal variation in recharge.....	22
13. Hardness concentrations in the consolidated and unconsolidated rocks of Vigo and Clay Counties.....	26
14. Bicarbonate concentrations in the consolidated and unconsolidated rocks of Vigo and Clay Counties.....	27
15. Sulfate concentrations in the consolidated and unconsolidated rocks of Vigo and Clay Counties.....	29
16. Fluoride concentrations in the consolidated and unconsolidated rocks of Vigo and Clay Counties.....	30

TABLES

	Page
Table 1. Mean monthly precipitation at Terre Haute, Indiana 1894-1962.....	4
2. Generalized stratigraphic section and hydrologic properties of Mississippian and younger rocks in Vigo and Clay Counties.....	6
3. Analyses of ground water in Vigo and Clay Counties.....	24
4. Significance of dissolved mineral constituents and properties of ground water.....	25

HYDROGEOLOGY OF THE PRINCIPAL AQUIFERS

IN VIGO AND CLAY COUNTIES, INDIANA

BY

L. W. Cable, F. A. Watkins, Jr., and

T. M. Robison

ABSTRACT

The rocks which immediately underlie Vigo and Clay Counties may be placed in two general categories--consolidated and unconsolidated. The consolidated rocks contain six sandstone bodies that are extensive enough to be considered important aquifers. Yields from wells tapping these aquifers average 6.6 gpm. The total amount of water in storage in the mapped areas of these aquifers is estimated to be 523 million gallons. The estimated current withdrawal is 1.8 mgd.

Aquifers in the unconsolidated deposits of the two-county area consist of relatively clean, coarse-textured sand and gravel deposited as glacial outwash. The sand and gravel deposits of the Wabash River valley form the most productive aquifer of the entire area with yields of as much as 2,700 gpm reported. Both confined and unconfined areas are present in this aquifer. The estimated regional value of transmissibility for the confined area of this aquifer is 5,100 gpd per foot and in the unconfined area 72,000 gpd per foot. There is estimated to be 367,800 million gallons of water in storage in the Wabash River valley aquifer. The estimated current daily withdrawals by wells tapping this aquifer is 22.2 million gallons.

On the basis of the partial analysis of more than 750 water samples and the complete analysis of 35 samples in the consolidated rocks of the Vigo-Clay County area yield calcium bicarbonate, sodium bicarbonate, and sodium chloride water, while the unconsolidated rocks of the area yield calcium bicarbonate water.

INTRODUCTION

Purpose and Scope

This investigation, part of the state-wide investigation of the ground-water resources of Indiana, was planned to identify and map the

principal aquifers in Vigo and Clay Counties; to determine their hydrologic characteristics and to ascertain and interpret the chemical quality of the water. This report presents an evaluation of the ground-water resources of the Vigo-Clay County area and provides information to aid in their location and development. Standard methods of investigation were used.

Previous Investigations

Detailed studies of the ground-water resources of the Vigo-Clay area have not been made previously. However, a reconnaissance of these resources was published in reports by Leverett (1897 and 1905) and Harrell (1935). Preliminary data and evaluations of the ground-water resources of both Clay and Vigo Counties were published separately (Watkins and Jordan, 1962, 1963).

Cooperation and Acknowledgments

The investigation of the ground-water resources of these counties has been conducted by the U. S. Department of the Interior, Geological Survey, in cooperation with the Department of Natural Resources, Division of Water. The authors express sincere thanks to all persons who contributed time, information, and assistance during the collection, tabulation and processing of data for this report. Among these are the following agencies of the Indiana Department of Natural Resources: the Geological Survey, the Division of Oil and Gas, and the Division of Water.

GEOGRAPHY

Physiography and Climate

The Vigo-Clay County area in west-central Indiana (fig. 1), is generally characterized by wide alluvial plains and aggraded valleys. This area is of low relief in comparison with surrounding areas. The most prominent physiographic feature of the two-county area is the Wabash River valley, which ranges from five to six miles in width and extends the entire length of western Vigo County. The area is drained by the Wabash and Eel Rivers and their tributaries.

Vigo and Clay Counties lie mostly within the Wabash Lowland physiographic province. However, the Tipton Till Plain extends into the northwest corner of Vigo County, and a small area on the eastern edge of Clay County is in the Crawford Upland. These physiographic units are those described by Malott (1922, p. 56-256).

Continuous records of the air temperature and precipitation at Terre Haute, Indiana have been kept since 1894 by the U. S. Weather Bureau. Based on normals for the period 1931-1960 the average annual precipitation

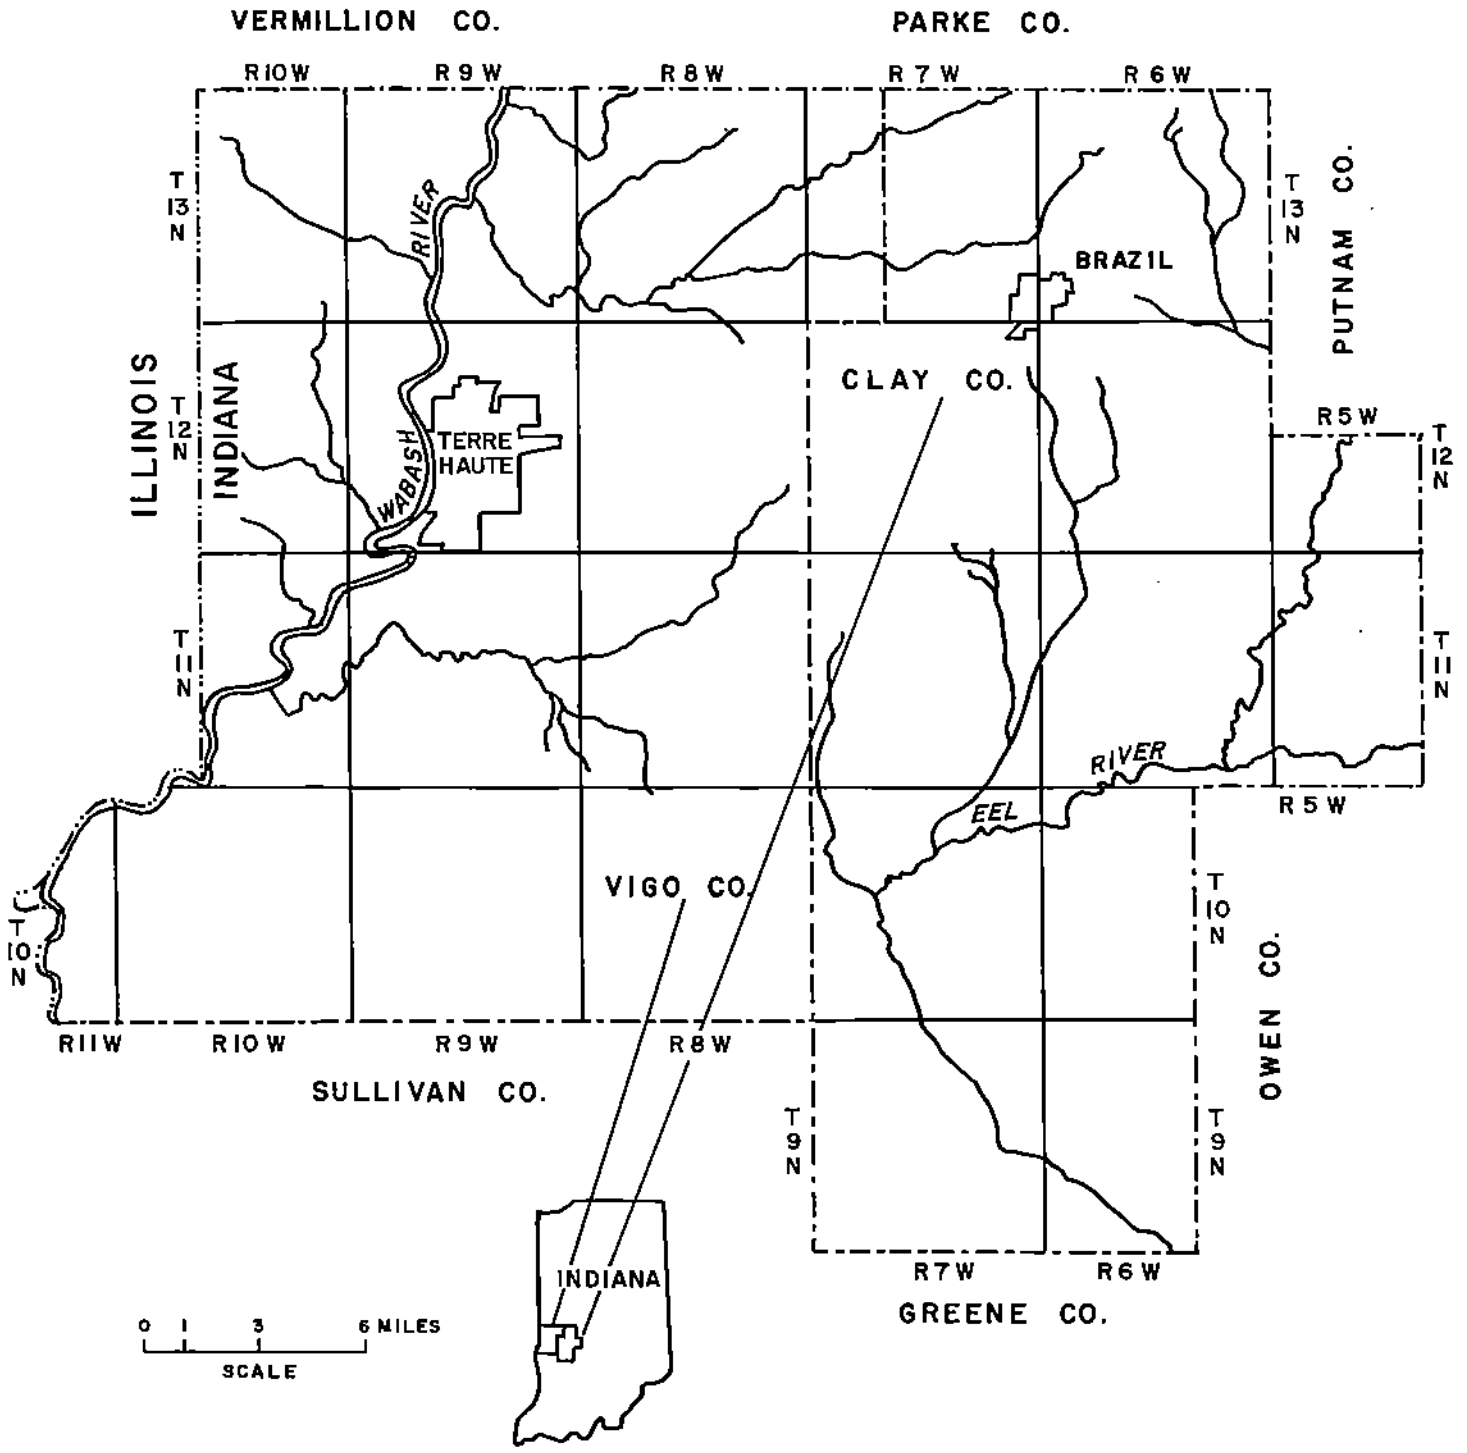


Figure 1. -- Map showing the location of Vigo and Clay Counties, Indiana.

is 39.41 inches and the average annual air temperature is 54.4°. Table 1 shows the average monthly precipitation.

Table 1.--Average monthly precipitation at
Terre Haute, Indiana, (1931-1960)

Month	Precipitation (inches)
January-----	2.34
February-----	2.32
March-----	3.80
April-----	3.40
May-----	5.08
June-----	3.73
July-----	3.96
August-----	3.56
September-----	3.45
October-----	2.45
November-----	3.47
December-----	2.58

HYDROGEOLOGY

The rocks which immediately underlie Vigo and Clay Counties belong in two general categories: consolidated and unconsolidated. Rocks of both types contain significant water-bearing zones which occur as separate units within the hydrologic system. The stratigraphy of these rocks and the hydrologic properties of their principal aquifers are shown on table 2. The geologic names used in this report are those used by the Indiana Geological Survey and are not necessarily recognized by the U. S. Geological Survey.

Consolidated Rocks as Sources of Water

The consolidated rocks of the Vigo-Clay County area are predominantly Pennsylvanian in age and are a part of the eastern shelf of the Eastern Interior structural basin. The rocks of the basin are mostly of shale, sandy shale, and fine- to medium-grained sandstone, and their most characteristic feature is the great areal persistence of many thin, readily distinguishable beds of limestone, black shale, coal, and underclay (Wanless, 1955). These strata dip to the west or southwest at an average rate of 25 to 30 feet per mile and crop out in wide belts across the bedrock surface (pl. 1).

In the eastern shelf area, as in most of the basin, the strata of Pennsylvanian age are in repetitive sequence or cycles known as cyclothems (Weller, 1930, Wanless and Weller, 1932). Each cyclothem ideally consists of ten distinct lithologic members extending from the base of a sandstone to the base of the next higher sandstone. The basal sandstone member is the principal water-bearing zone of the sequence. In the Vigo-Clay County area there are six such zones which are extensive enough to be considered important aquifers. These aquifers show significant similarity in the geologic, hydrologic, and quality-of-water characteristics.

The sandstone bodies of the area commonly contain two phases--a sheet phase and a channel phase. The sheet phase is widespread, thin and discontinuous, while the channel phase is laterally restricted but relatively thick. Because of its greater thickness, the channel phase offers the best potential within the aquifer for an adequate water supply. For a more detailed study of Middle Pennsylvanian channel-fill sandstones in this area, see Friedman, 1960.

The approximate depth to any bedrock aquifer can be estimated by comparing the topographic map of Vigo and Clay Counties (pl. 2) with the structure contour map of the aquifer (figs. 4-9) and subtracting the elevation of the aquifer surface from that of land surface at the desired location.

Recharge to the bedrock aquifers occurs principally at the bedrock surface where the aquifers crop out or are in direct contact with the overlying unconsolidated Quaternary deposits. Precipitation enters the aquifers directly through their outcrops at land surface or indirectly by downward percolation through the unconsolidated deposits.

Water is discharged into streams by effluent seepage through the relatively thin overburden where the aquifers are shallow. As the depth of the aquifer increases, however, the opportunity for the water to circulate decreases. The gray shale members of the cyclothems which enclose the basal sandstone body form effective confining layers with depth. Although a small amount of water may leak into the enclosing shale, the opportunity for natural discharge in the deeper areas of the aquifers is slight.

Figure 2 shows the hydrograph of observation well Vigo 5 and the monthly precipitation at Terre Haute, Indiana over an 8½ year period. This well, located in the SE¼SW¼ sec. 34, T. 11 N., R. 9 W., is open to

Table 2.--Generalized stratigraphic section and hydrologic properties of Mississippian and younger rocks in Vigo and Clay Counties

System	Series	Deposits or Formation	Important Aquifer(s)	Average yield of wells (gpm)	Estimated field coefficient of permeability	Estimated total amount of water in storage in millions of gallons	Estimated uses (mgd)	Potential production considered adequate for:	Quality of Water	
Quaternary	Recent	Alluvium	Unconfined	680	1,200	367,000	21.4	Large industrial and municipal supplies	Usually very hard and deficient in fluoride. Excessive iron common	
	Pleistocene	Glacial	Confined	25	550	370	.8	Moderately large industrial and municipal supplies		
Carboniferous	Upper Pennsylvanian	Futoka (of local usage)**	None						Shallow water usually similar to that in Quaternary rocks. At depth, water usually soft, frequently high in fluoride, and has higher concentrations of bicarbonate, total dissolved solids and chloride. Excessive iron common at all depths	
		Shelburne	Sandstone Unit 6	3.2	23	34				
	Middle Pennsylvanian	Digger	Sandstone Unit 5*				42			
		Petersburg	Sandstone Unit 4		5	4	52	1.8	Domestic, farm, small industrial and small municipal supplies	
		Linton	Sandstone Unit 3		8	14	44			
		Staunton	None							
		Brazill	None							
		Lower Pennsylvanian	Manfield	Sandstone	Unit 2	7.6	11	264		
					Unit 1	8.4	12	87		
		Mississippian	Chester (?)		None					Insufficient data

*No hydrologic data available.

**See Wior and Gray, 1961

two bedrock aquifers, units 5 and 6 (table 2). Although the amount of fluctuation varies from year to year, the general configuration of the hydrograph is considered to be typical for unpumped wells in the consolidated rock aquifers.

Figure 3 shows the number of wells and yields in gallons per minute from wells in these aquifers. This illustration is based on those water-well records in which the casing depth indicated that the source of water was restricted to a single bedrock aquifer. The average yield of each of the bedrock aquifers is shown in table 2. However, because of variations in thickness and permeability within any one aquifer, it is not possible to predict with any great degree of accuracy the yield of a well before drilling.

The field coefficients of permeability (definition, p. 53) of these aquifers ranges from 4 to 23 (table 2). No values are given for the coefficients of transmissibility (definition, p. 53) because of the wide local variation of thickness of the aquifers. However, the coefficient of transmissibility of an aquifer may be estimated at any point by use of the following formula:

$$T = P (m)$$

where P is the field coefficient of permeability and m is the aquifer thickness at the location desired.

The total amount of water estimated to be in storage in the bedrock aquifers of the Vigo-Clay County area, along with potential recharge, greatly exceeds the present daily withdrawals. The total amount of water in storage in the mapped areas of all bedrock aquifers is estimated to be 523 million gallons, the estimated potential recharge is 7 million gallons per day, and the estimated current withdrawal is 1.8 mgd. The total amount of water in storage in the mapped area of each individual bedrock aquifer is listed in table 2. These figures are based on an estimated coefficient of storage of .0001 (definition, p. 53).

Mississippian System

Rocks of Mississippian age crop out at the bedrock surface in a small area in east-central Clay County (pl. 1). These rocks are the oldest bedrock present in the report area (table 2). Although some wells in the extreme eastern part of Clay County reach the Mississippian rocks, these wells produce very little water and no important aquifers were noted.

Pennsylvanian System

Mansfield Formation

The Mansfield Formation, the base of the Pennsylvanian System, Lower and Middle Pennsylvanian series in Indiana, rests unconformably upon rocks of Mississippian age (table 2) and crops out over extensive areas of the bedrock surface throughout central and eastern Clay County (pl. 1).

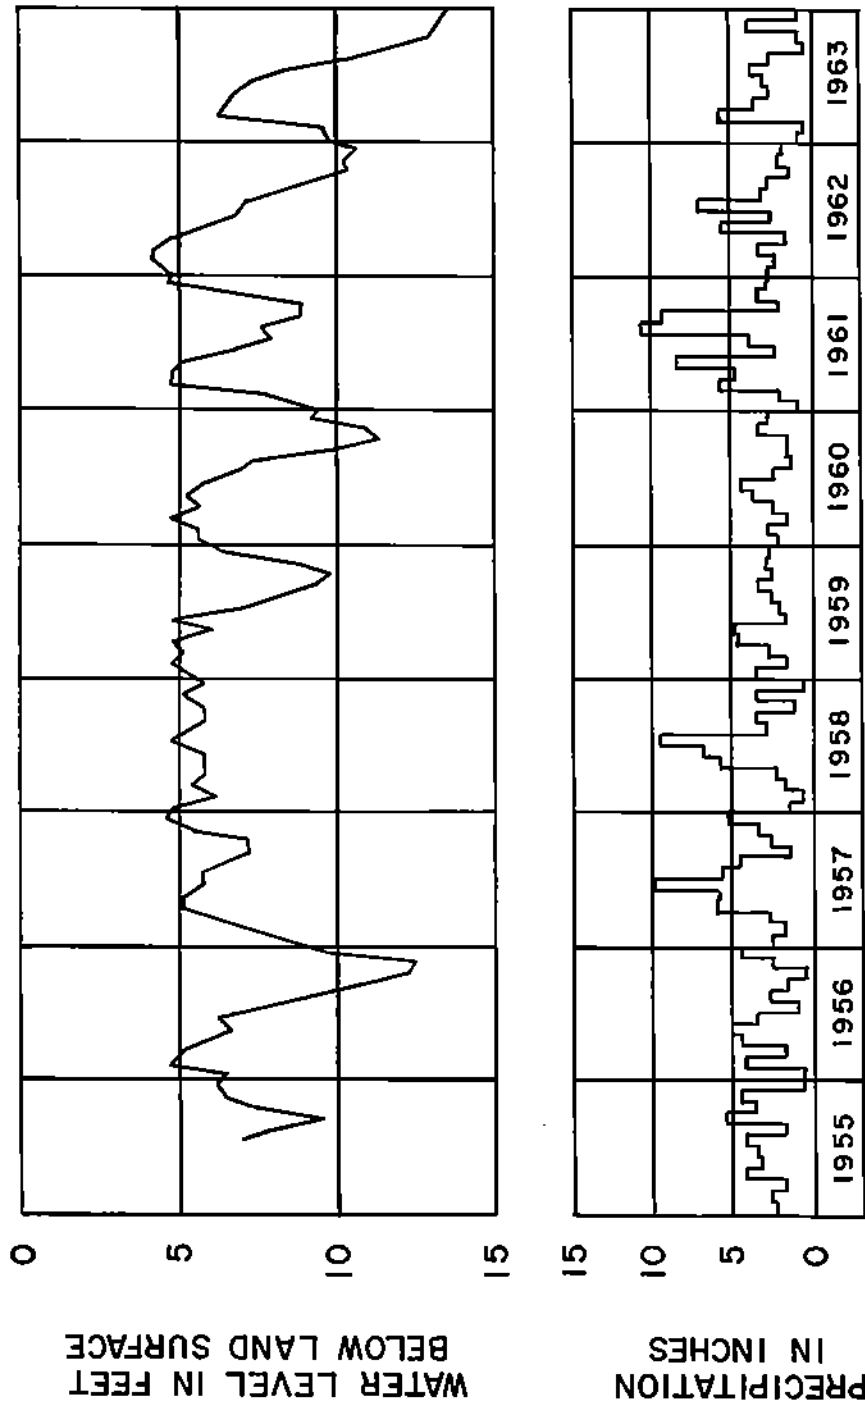


FIGURE 2 -- Hydrograph of observation well Vigo 5 and precipitation at Terre Haute, Indiana showing the amount of waterlevel fluctuation to be expected as a result of seasonal variation in recharge.

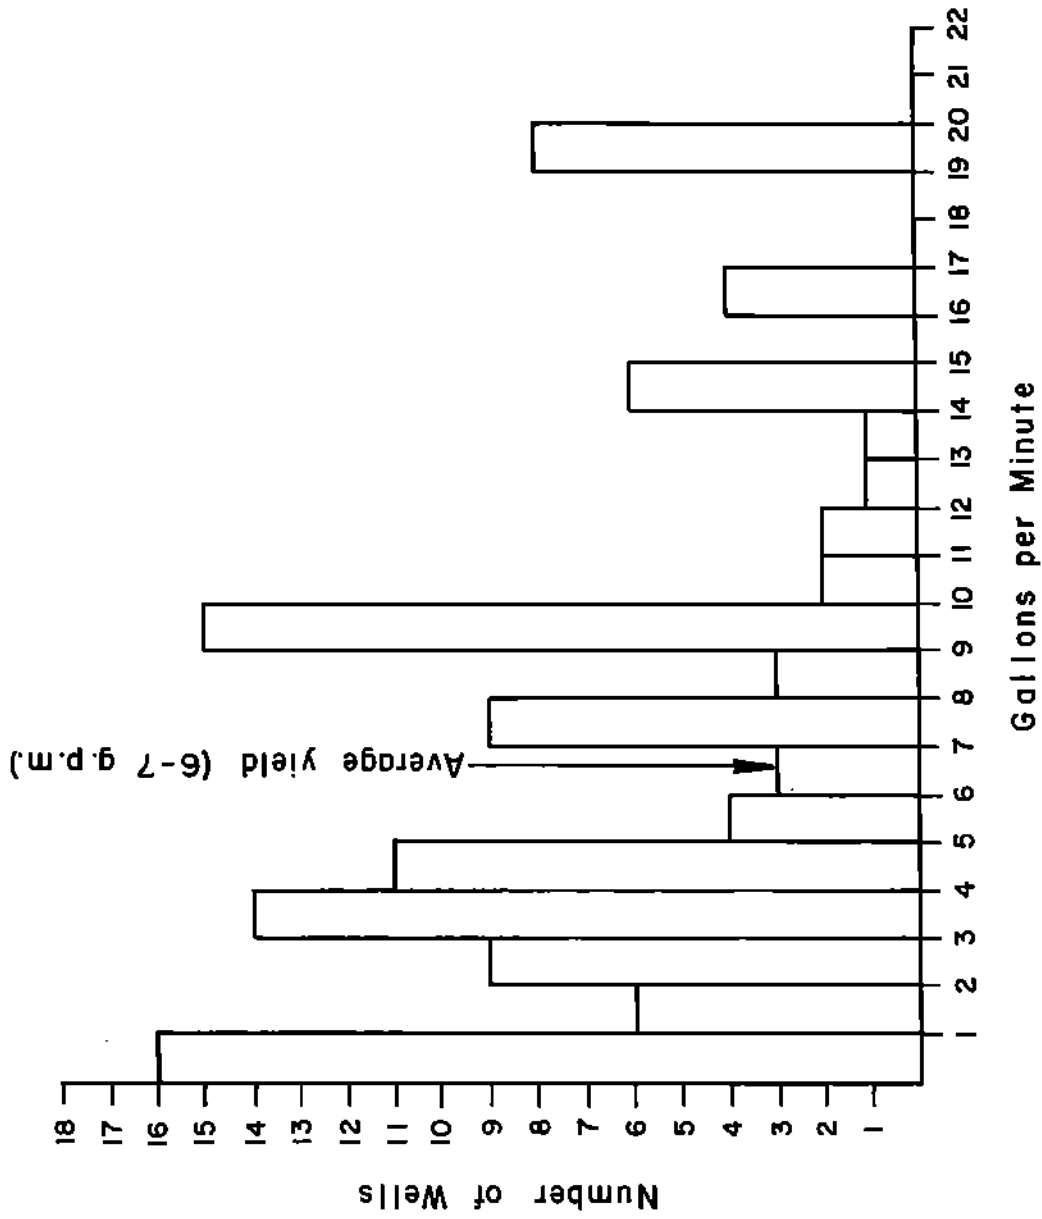


Figure 3. Yields from wells in which the casing record indicated that the source of water was restricted to a single bedrock aquifer.

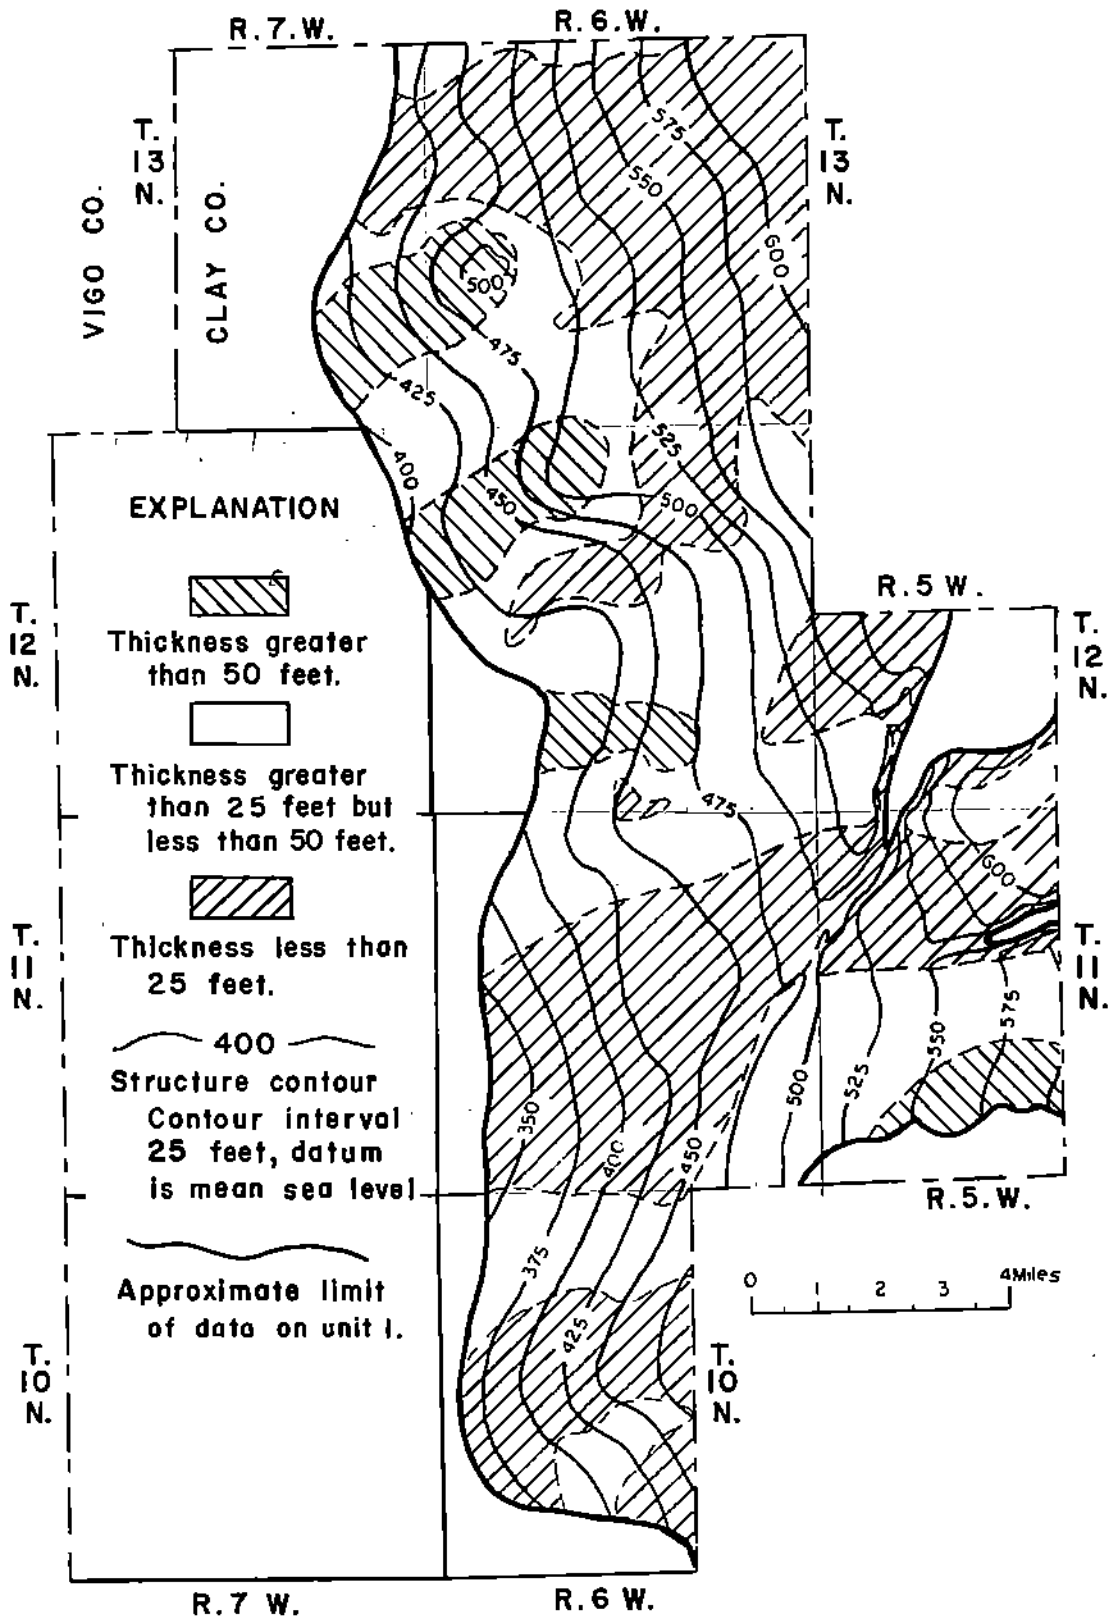


FIGURE 4. -- map showing the thickness and surface configuration of unit I of Mansfield Formation.

Lower or basal Mansfield

This formation yields water from two principal zones, herein designated unit 1 and unit 2. Unit 1 is located at or near the base of the formation (table 2). Figure 4 shows the surface configuration, altitude, and range in thickness of this aquifer.

Unit 2 is at or near the top of the formation (table 2), and in places forms a split aquifer in which the upper and lower parts may be separated locally by as much as 50 feet of dense shale and sandy shale. Unit 2 is the most extensive bedrock aquifer of the area. Figure 5 shows the configuration and altitude of the aquifer surface and also the range in thickness. Together units 1 and 2 constitute the principal source of ground water in Clay County. These aquifers supply water for domestic, farm, small industrial, and small municipal systems.

Brazil and Staunton Formations

The Brazil and Staunton Formations constitute the lowest and next to lowest formations in the Middle Pennsylvanian Series in Indiana respectively (table 2). These formations crop out over a wide area of the bedrock surface in western Clay County and eastern Vigo County (pl. 1). There are no extensive water-bearing zones present in either of these two formations; however, water of sufficient quantity and quality for domestic supplies is produced locally from small sandstone lenses and coalbeds.

Linton Formation

The Linton Formation overlies the Staunton Formation and is a part of the Middle Pennsylvanian Series of Indiana. This formation crops out at the bedrock surface in eastern Vigo County and western Clay County (pl. 1). At the base of this formation is a fine- to medium-grained massive sandstone. This sandstone is an aquifer and is herein designated unit 3 (table 2).

Unit 3 supplies water for farm, domestic, small industrial, and small municipal systems in east-central and southeastern Vigo County. Figure 6 shows the configuration and altitude of the aquifer surface plus the range in thickness. That part of unit 3 which is in northwestern Vigo County was mapped almost exclusively on the basis of information from coal tests and oil well logs; therefore, no hydrologic data were available.

Petersburg Formation

The Petersburg Formation overlies the Linton Formation and is also a part of the Middle Pennsylvanian Series of Indiana. This formation crops out at the bedrock surface in central and southeastern Vigo County (pl. 1). Just as in the underlying Linton Formation, the base of the Petersburg Formation is formed by a fine- to medium-grained massive sandstone which is an aquifer. This aquifer is herein designated unit 4 (table 2).

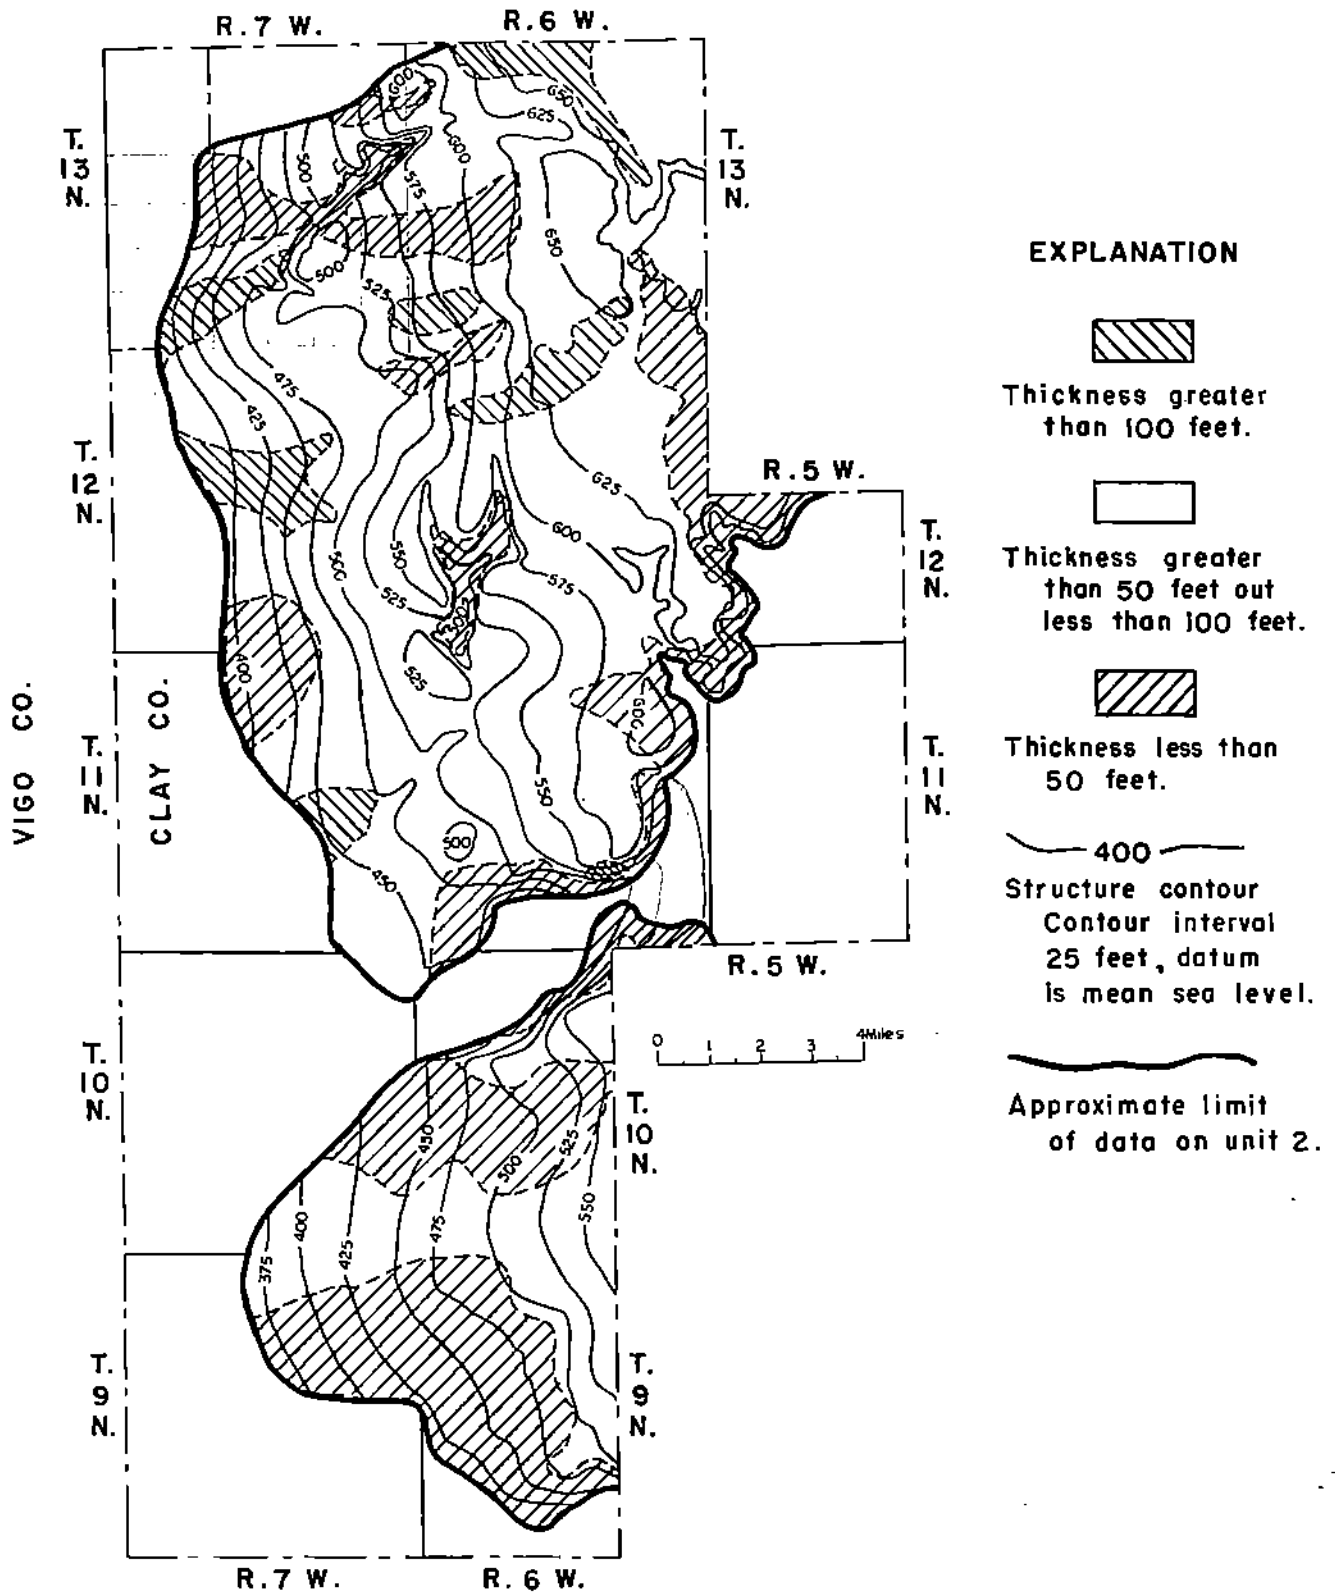


FIGURE 5.--Map showing the thickness and surface configuration of unit 2. of Mansfield Formation.

Upper Mansfield

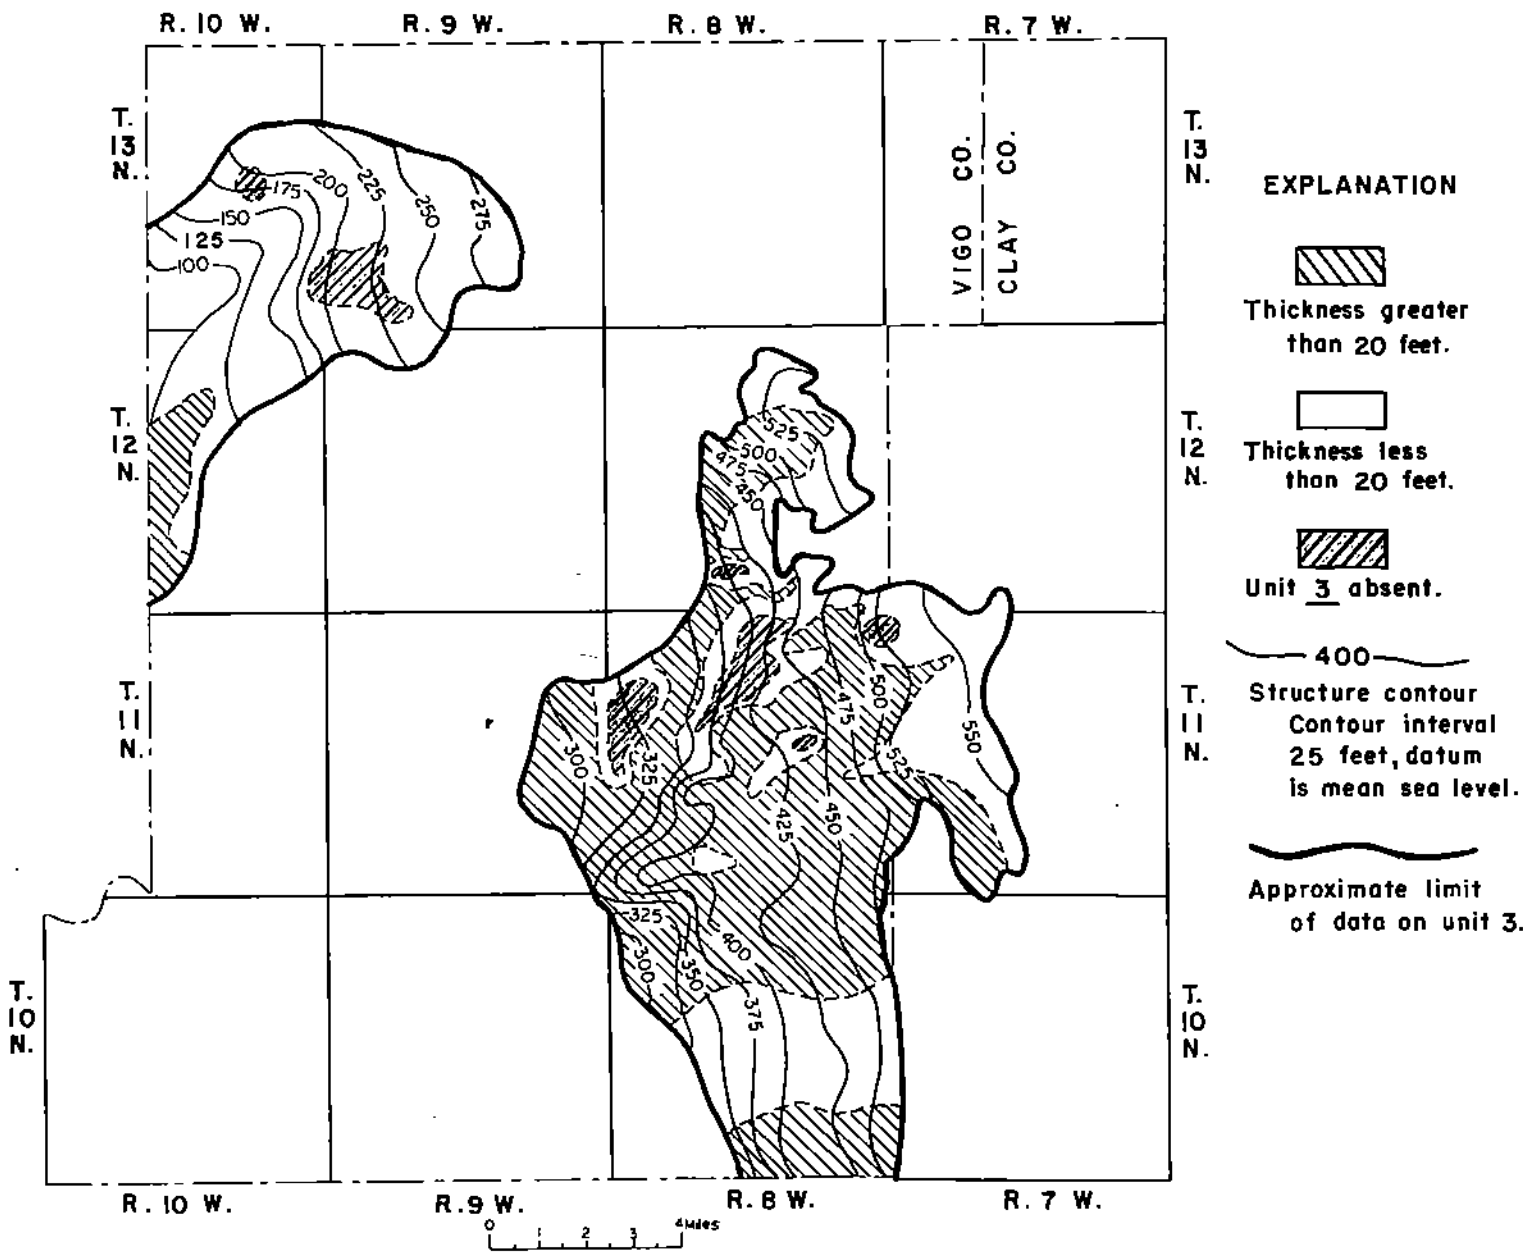


FIGURE 6.-- Map showing the thickness and surface configuration of unit 3.

*Linton Fm.
basal sandstone*

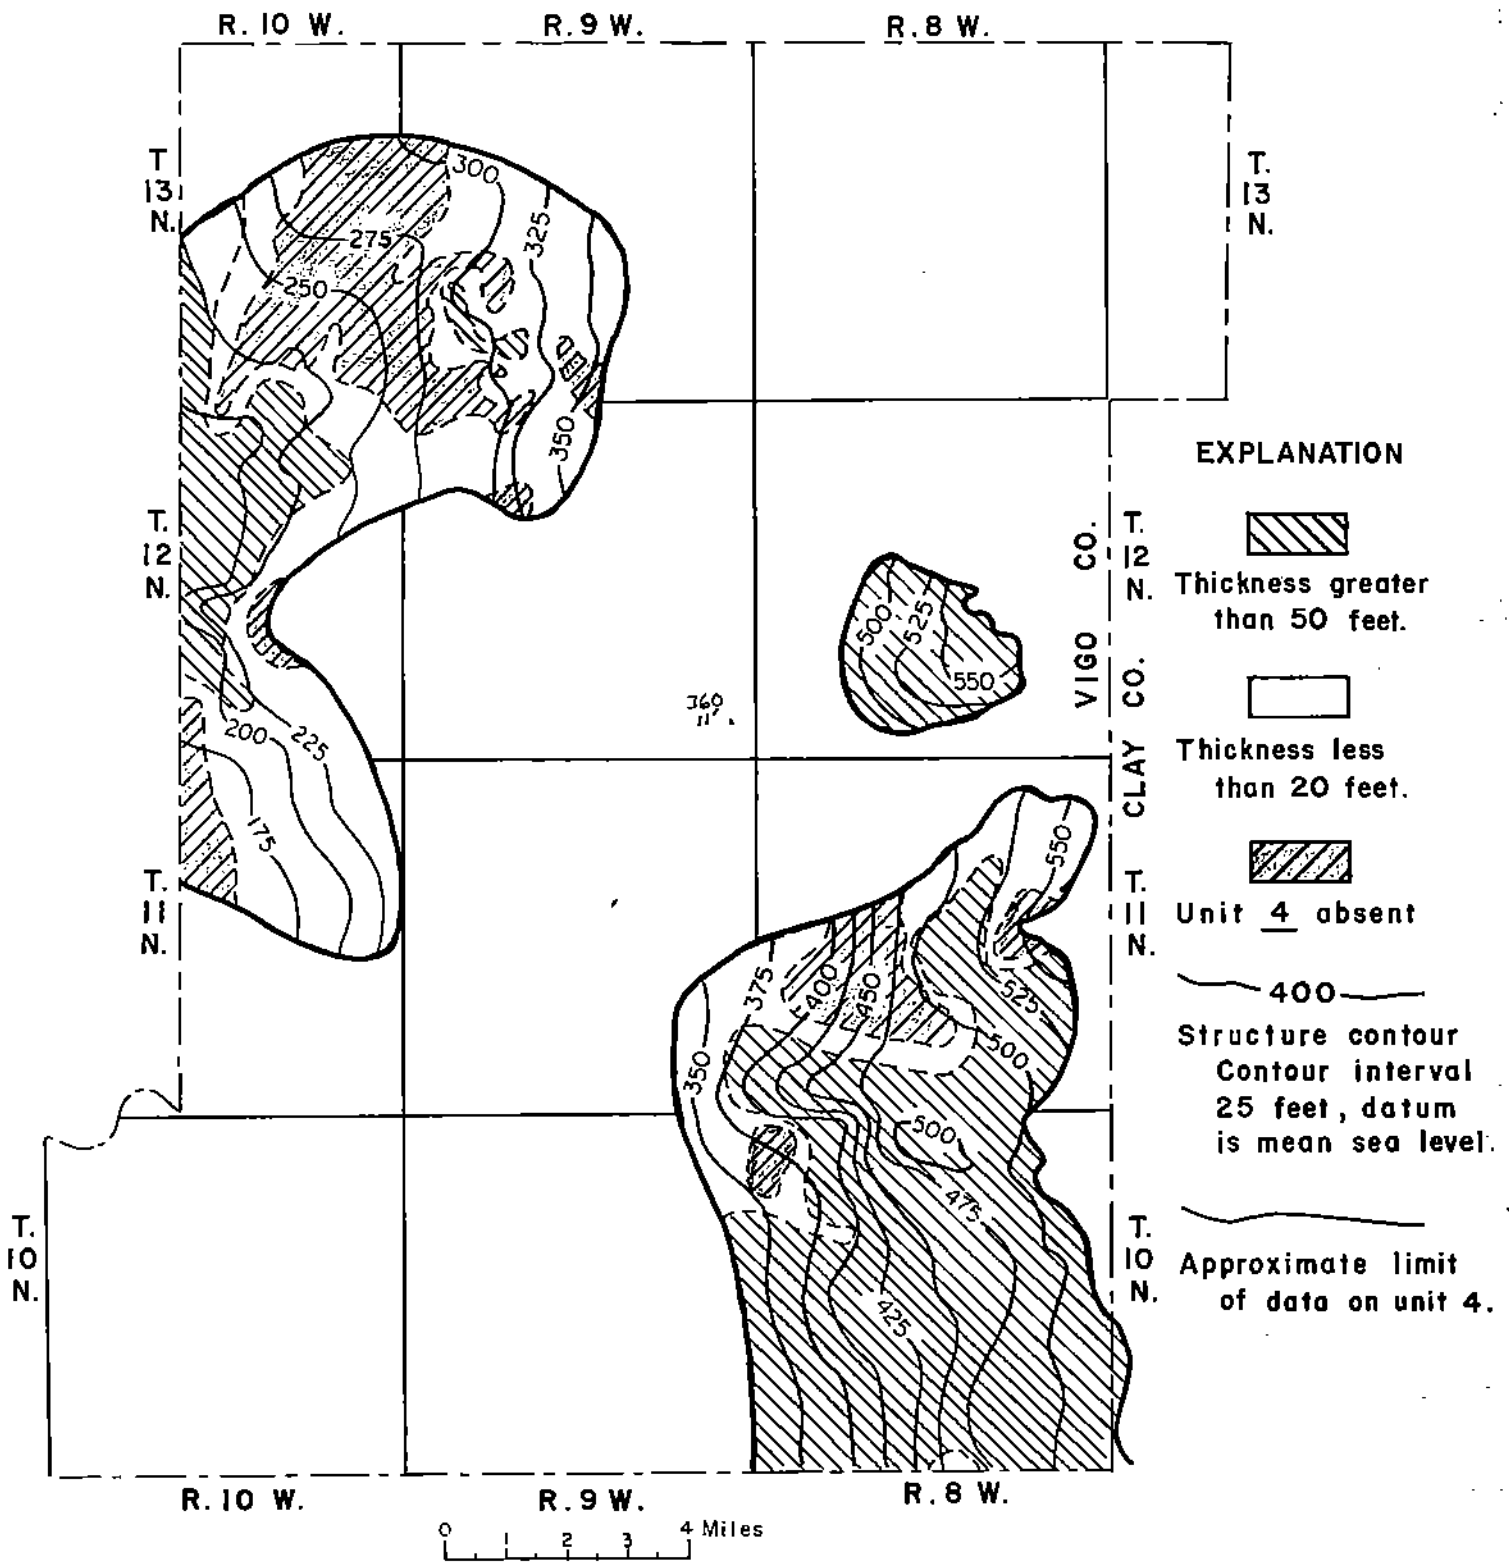


FIGURE 7. -- Map showing the thickness and surface configuration of unit 4.

*Petersburg Fm.
basal sandstone*

Unit 4 supplies water for farm, domestic, and small industrial and municipal systems. Figure 7 shows the surface configuration, altitude, and the range in thickness of this aquifer. That part of unit 4 which is in the northern and central portion of western Vigo County was mapped almost exclusively on the basis of information from coal tests and oil well logs, therefore, no hydrologic data were available. Together with unit 3 this aquifer constitutes the principal source of ground water in east-central and southeastern Vigo County.

Dugger Formation

The Dugger Formation is the youngest formation in the Middle Pennsylvanian Series of Indiana. This formation crops out at the bedrock surface throughout central Vigo County (pl. 1). Located in the upper-middle part of this formation and directly below the Universal Limestone Member is a water-bearing body of sandstone. This sandstone serves as an aquifer in western Vigo County and is herein designated unit 5 (table 2). In Vigo County wells in unit 5 yield water mostly for domestic use. Figure 8 shows the configuration and altitude of the aquifer surface as well as the range in thickness.

Shelburn Formation

The Shelburn Formation is the base of the Upper Pennsylvanian Series in Indiana. This formation crops out at the bedrock surface throughout central and western Vigo County (pl. 1). At the base of this formation is the Busseron Sandstone Member, which is a fine- to medium-grained massive sandstone. This sandstone is an aquifer and is herein designated unit 6 (table 2).

Although this aquifer is somewhat restricted in the report area, some domestic wells are made in it in the southwestern part of Vigo County. Figure 9 shows the configuration and altitude of the aquifer surface and also the range in its thickness.

Patoka Formation¹(of local usage)

The Patoka Formation (of local usage) is directly above the Shelburn Formation and constitutes the youngest consolidated rocks in the report area (table 2). This formation crops out at the bedrock surface discontinuously along the western edge of Vigo County (pl. 1). No important aquifers are present in this formation in the report area.

¹This formation name follows the usage proposed by Wier. (See Wier and Gray, 1961).

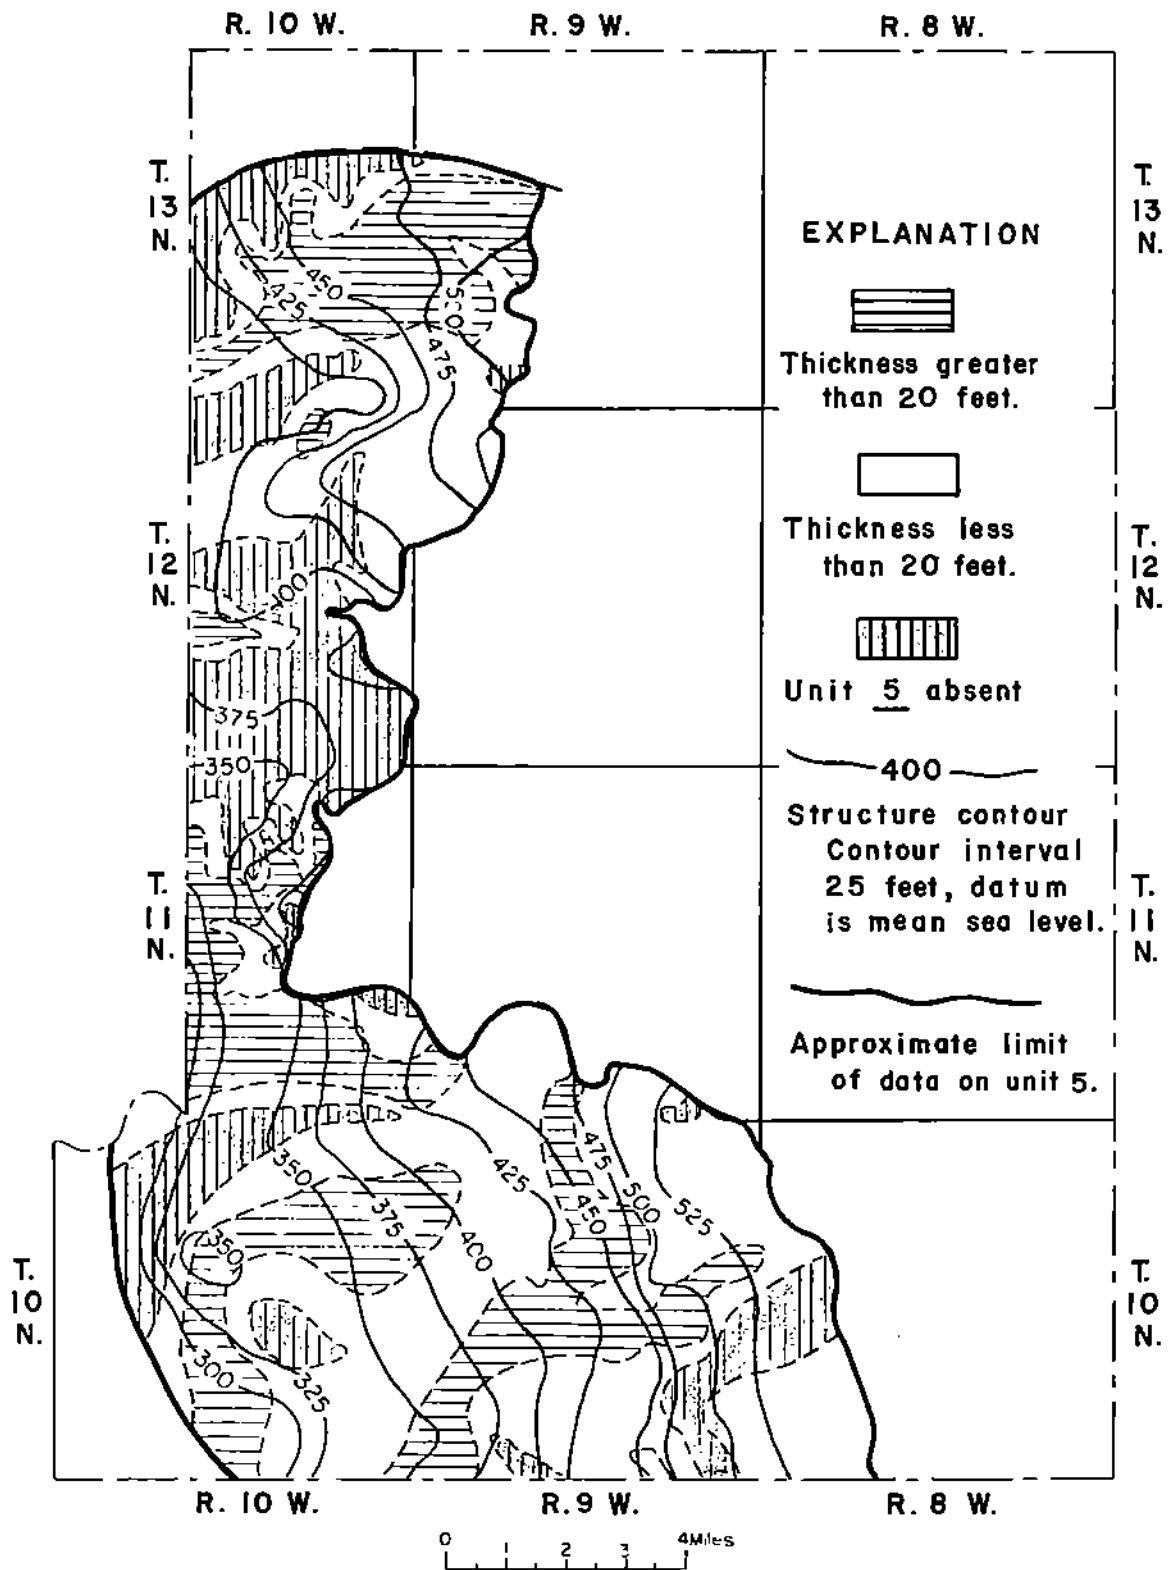


FIGURE 8. -- Map showing the thickness and surface configuration of unit 5.

*Dugger Fm.
upper ss.*

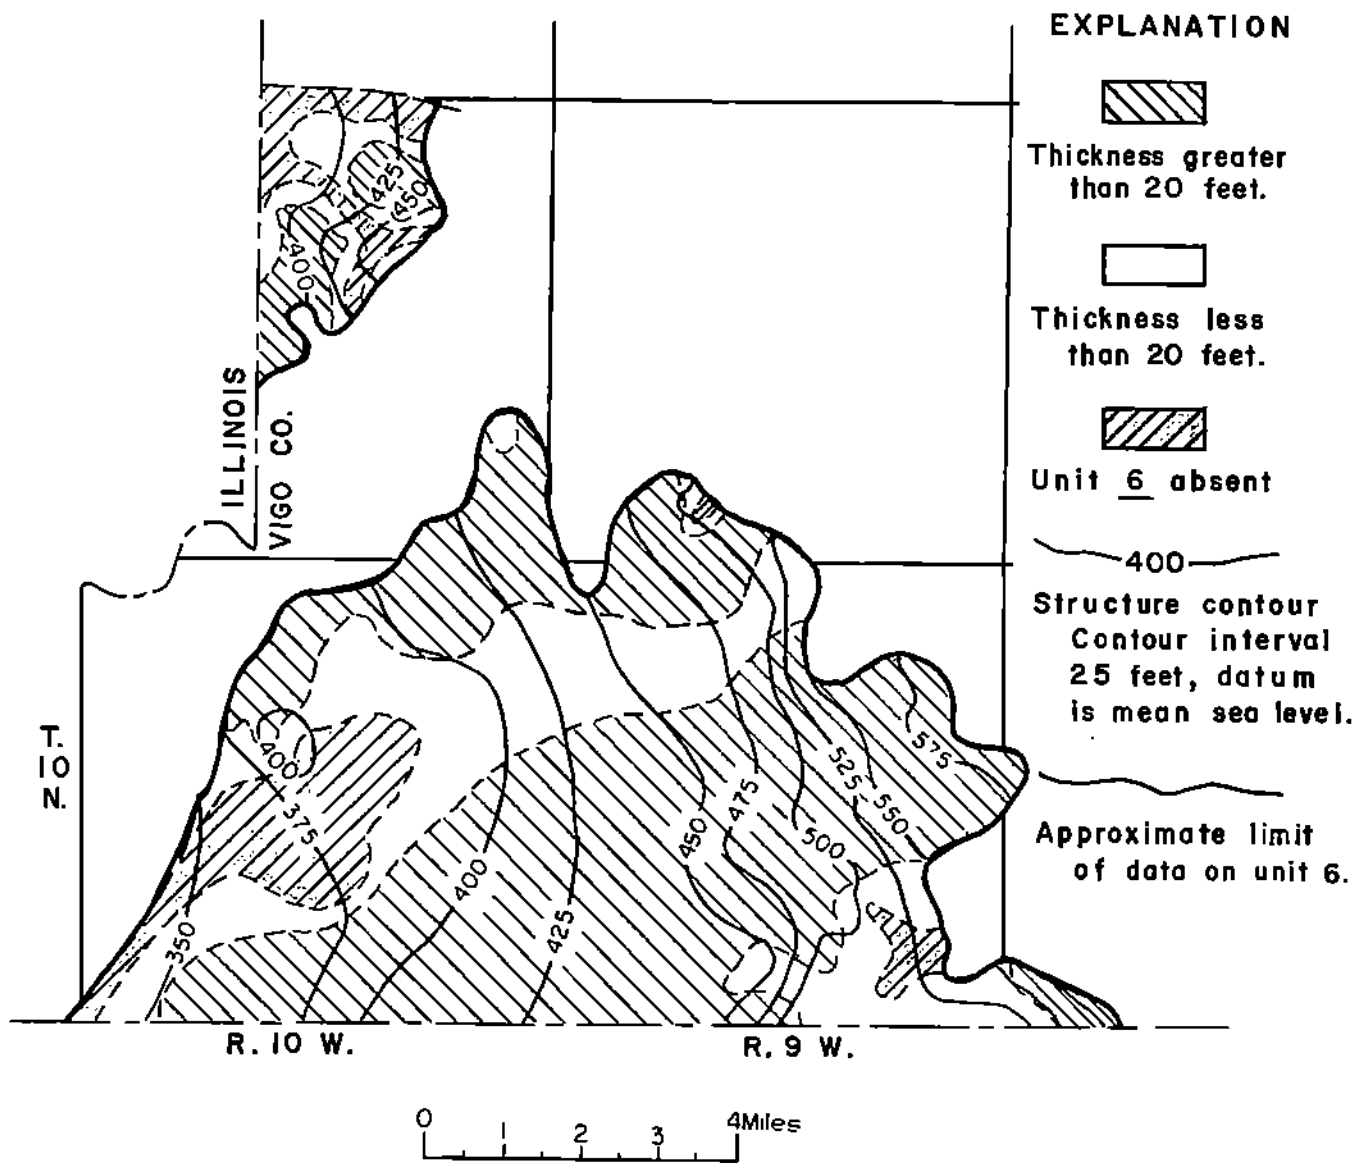


FIGURE 9.-- Map showing the thickness and surface configuration of unit 6.

Busseron Ss. Mbn.
Shelburn Fm.

Bedrock Topography

The topography of the bedrock surface underlying the unconsolidated glacial deposits of Vigo and Clay Counties is the result of a long interval of weathering and erosion which lasted from late Paleozoic to Pleistocene time. Except in the immediate vicinity of the Wabash and Eel River valleys, this buried surface is a gently rolling plain with moderate relief.

An extensive system of buried bedrock valleys is located in the north-central part of the area. These valleys generally trend southwestward and are part of the buried Montclair Valley system which represents the pre-Pleistocene course of the Upper Wabash River (Wayne, 1956, p. 43-44). Portions of this system were also mapped by Hutchison (1960, fig. 2). This system joins the present day valley of the Wabash River in the vicinity of north Terre Haute.

A detailed knowledge of the features of the bedrock surface is important in ground-water investigations in this area. This surface is the interface between the consolidated and unconsolidated rocks, thus separating them lithologically but at the same time connecting them hydrologically. Aquifers in the overlying unconsolidated material may be in direct contact with the outcrop of one or more bedrock aquifers, thereby forming one continuous hydrologic system. Because of the contrasting lithologic characteristics of the rocks on either side of this interface, yields from wells in this system generally will be substantially less in the consolidated rock aquifers than those in the unconsolidated rock aquifers.

Unconsolidated Rocks as Sources of Water

The unconsolidated deposits of the Vigo-Clay County area are mostly of Pleistocene age, with some recent alluvium present (table 2). These deposits form a cover over most of the area (pl. 4) and generally mask the underlying bedrock. Aquifers in this material consist of relatively clean, coarse-textured, sand and gravel which occur as alluvium and glacial outwash deposited primarily in the Wabash and Eel River valleys (pl. 5). No attempt has been made herein to differentiate these deposits stratigraphically. The tills of the area are commonly too poorly sorted and fine grained to be considered aquifers.

The water-bearing sand and gravel deposits associated with the present and pre-Pleistocene valleys of the Wabash River constitute the thickest and most extensive aquifer of the entire area. This huge deposit of glacial-outwash sand and gravel forms one continuous hydrologic system in

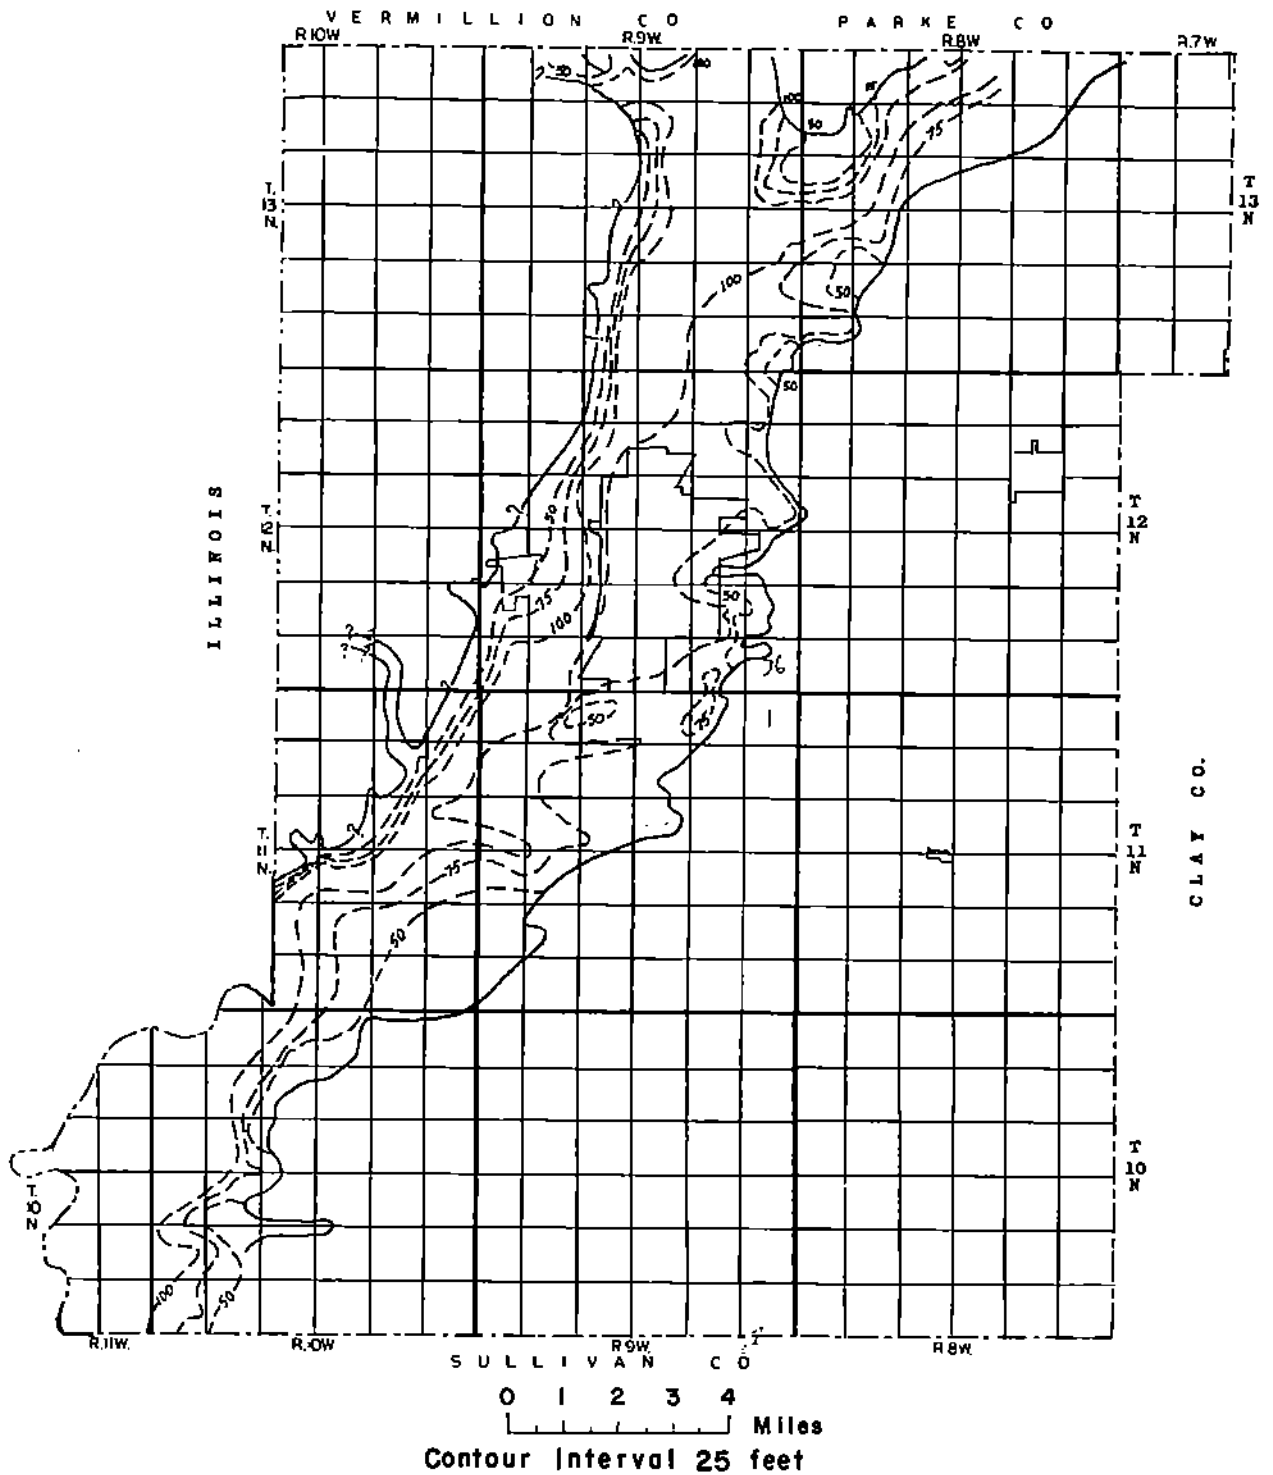


FIGURE 10 -- Map of Vigo County showing saturated thickness, of the unconfined aquifer in the Wabash River valley.

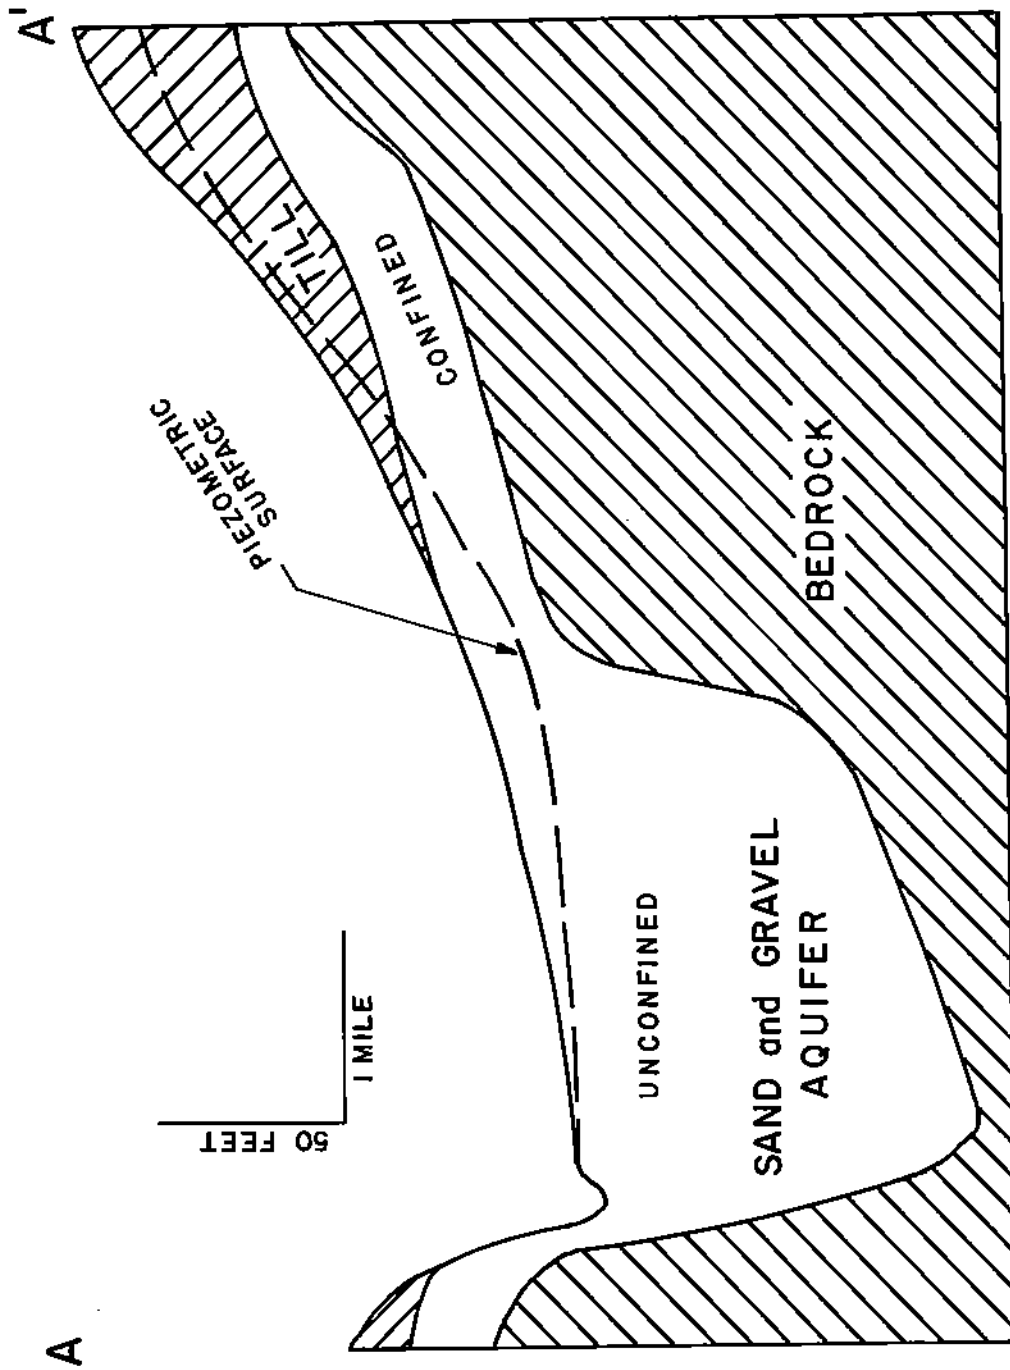


FIGURE 11. -- Cross section of the Wabash River valley (See pl. 4) showing the relationship of the confined and unconfined areas of the aquifer.

which both water-table and artesian conditions are present (pl. 5). The aquifer is unconfined in the vicinity of the Wabash River and water-table conditions prevail. Saturated thicknesses in excess of 100 feet are noted (fig. 10). Where the aquifer is covered by tills of Illinoian age, artesian conditions prevail. Figure 11 is a cross section of the Wabash River valley in western Vigo County (pl. 5) and shows the relationship of the confined and unconfined areas.

Recharge to the unconfined part of this aquifer is by the downward percolation of precipitation. Where the aquifer is confined recharge takes place by slow percolation of the water through the till layer. The configuration of the piezometric surface (pl. 5) indicates that the water in the aquifer flows toward the Wabash River where natural discharge takes place by effluent seepage.

Fluctuations of the water level in this aquifer as a result of seasonal variations in recharge are shown on figure 12. Figure 12A shows the hydrograph of observation well Vigo 3 which is in the confined area, and figure 12B shows the hydrograph of observation well Vigo 2 which is in the unconfined area. These wells are in the NW $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 29, T. 12 N., R. 8 W., and the NE $\frac{1}{4}$ SW $\frac{1}{4}$ sec. 28, T. 12 N., R. 9 W. respectively.

Yields as high as 2,700 gpm from wells in the unconsolidated deposits have been reported by water well drillers. The average yields for the confined and unconfined areas are shown in table 2. These figures are based on the records of 106 water wells of which 42 were in the confined and 64 in the unconfined area of the aquifer.

The field coefficient of permeability for the confined and unconfined areas of this aquifer are given in table 2. The estimated coefficients of transmissibility range from 91 gpd per foot in the confined area to 280,000 gpd per foot in the unconfined area. The estimated regional value of transmissibility for the confined area of the aquifer is 5,100 gpd per foot; that of the unconfined area is 72,000 gpd per foot.

In the Wabash River valley aquifer, as in the bedrock aquifers, the total amount of water estimated to be in storage and the potential recharge both greatly exceed current daily withdrawals. The total amount of water in storage in both the confined and unconfined areas of this aquifer in the Vigo-Clay County area is approximately 367,370 million gallons, the estimated potential recharge is 68 mgd, and the estimated current withdrawal is 22.2 mgd. The total amounts of water in storage in the confined and unconfined areas of this aquifer are listed separately in table 2. These figures are based on an estimated coefficient of storage of .002 for the confined area and .20 for the unconfined area.

The Eel River valley is mostly in Clay County. (See pl. 5). In this valley as in the Wabash River valley, the water-bearing sand and gravel deposits form one continuous hydrologic system. This aquifer is entirely confined by clay and till and is somewhat more restricted in size than that of the Wabash River valley. The piezometric map (pl. 5) indicates that recharge and discharge take place in much the same manner as they do in the Wabash River valley aquifer. A detailed analysis of the hydrologic properties of this aquifer is not possible due to insufficient data.

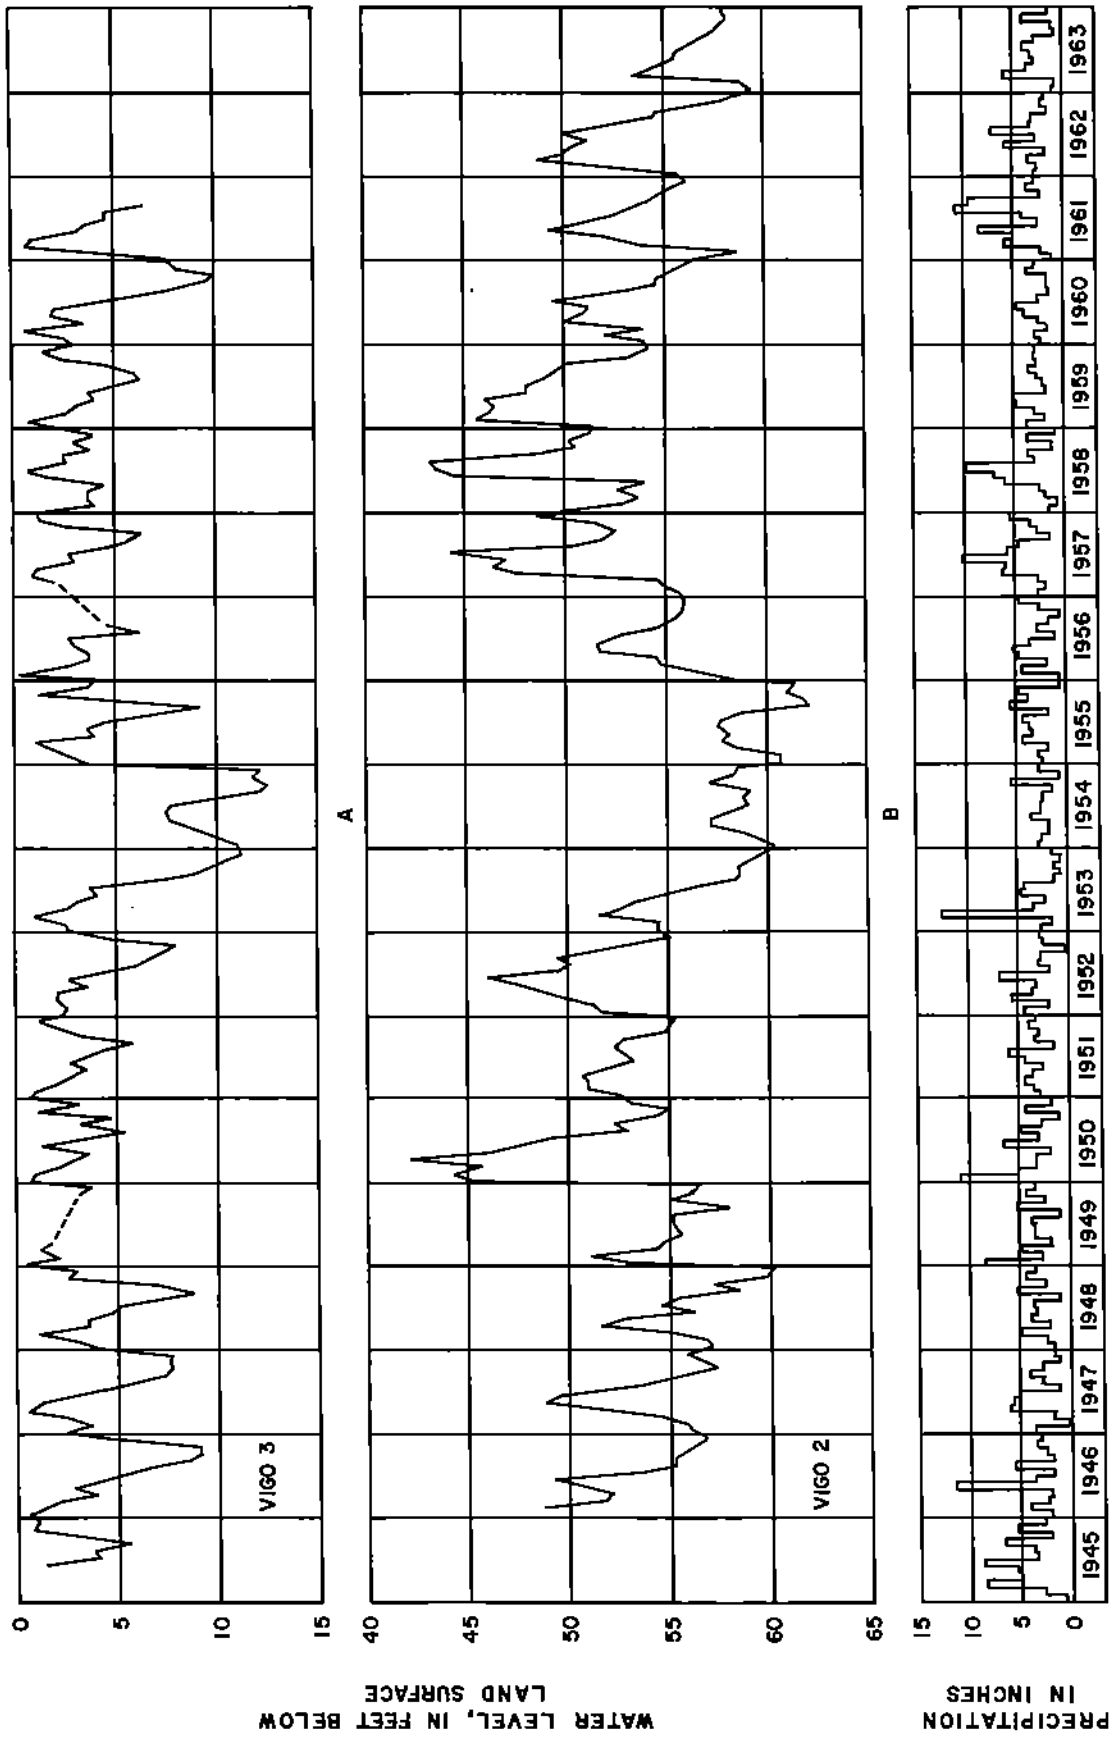


FIGURE 12. --- Hydrographs of observation wells in the Wabash River valley and precipitation at Terre Haute, Indiana showing the amount of water-level fluctuation to be expected as a result of seasonal variation in recharge.

QUALITY OF WATER

The chemical quality of the ground water of Vigo and Clay Counties was determined from the partial analysis of over 750 water samples and the complete analysis of 35 water samples. A tabulation of the complete analyses of 25 water samples is given in table 3. The significance of, and recommended limits for, the various constituents are given in table 4.

The waters from the consolidated and unconsolidated rocks are discussed together in this section because they are interrelated, one modifying the other, and therefore, not readily discussed separately. The term "consolidated rocks" as used in this section refers only to rocks of Mississippian age to derive meaningful interpretations.

Hardness

The water from the unconsolidated rocks and from the shallower wells in the consolidated rocks is generally very hard. This is due to the presence of fragmented calcareous material such as limestone or dolomite in the unconsolidated rocks. As water from precipitation passes through these rocks, calcium and magnesium ions are taken into solution, primarily as bicarbonates. The water in the underlying consolidated rocks is mostly derived from the unconsolidated rock and would, therefore, be expected to be of similar quality. (See fig. 13). This is true, however, only for the upper part of the consolidated rocks. The water from the deeper wells, having had contact with a thicker section of the rock for a longer period of time, has apparently been softened by contact with ion exchange minerals. It is also possible that the ion exchange minerals have been progressively depleted of sodium toward the surface.

The decrease in hardness with depth is especially apparent in the Middle and Upper Pennsylvanian rocks of Vigo County where the median hardness concentrations of deep-well water is only 10 ppm. The lower hardness values for water from deep wells in this area can be attributed principally to progressive sodium-depletion of ion-exchange minerals eastward and to the progressively higher percentages of clay in the younger Pennsylvanian beds westward (Potter and Glass, 1958, p. 12). Many clay minerals have ion-exchange properties.

Bicarbonate

As shown on figure 14, the bicarbonate content of water from deep wells in the consolidated rock is significantly greater than that from shallower wells. This effect is much less significant in wells in the unconsolidated rocks. No single reason for the increase of the bicarbonate concentration with depth in the consolidated rocks is apparent. However, this may be due to a combination of the following conditions: presence of carbon dioxide supply; abundant sodium and potassium ions; lack of acid-forming conditions.

Table 3.--Chemical analyses of Ground Water in Vigo and Clay Counties, Indiana
(Constituents given in parts per million, except hydrogen ion concentration (pH))

Well	Well Location	County	Well Depth (feet)	Date of Collection	Temp. (°F.)	Bitter (SiO ₂)	Iron (Fe)	Manganese	Calcium (Ca)	Magnesium (Mg)	Sodium (Na)	Potassium (K)	Bicarbonate (HCO ₃)	Carbonate (CO ₃)	Sulfate (SO ₄)	Chloride (Cl)	Fluoride (F)	Nitrate (NO ₃)	Dissolved Solids (Calculated)	Hardness as CaCO ₃	Noncarbonate Hardness	Specific Conductance (Microhm at 25° C.)	Hydrogen Ion Concentration (pH)	
Pennsylvanian - Mansfield Formation - Unit 1																								
SE ₁	SE ₁ , Sec. 18 T. 11 N., R. 5 W.	Clay	186	6-28-63	80	12	6.1	0.02	58	21	32	1.8	260	0	82	11	0.2	0.7	383	231	18	589	7.1	
NE ₁	NE ₁ , Sec. 3 T. 12 N., R. 7 W.	Clay	220	3-11-57	58	0-0	.26	.03	21	9.2	202	2.8	628	0	3.2	7.9	2.6	.2	568	90	0	914	8.1	
SE ₁	SE ₁ , Sec. 28 T. 13 N., R. 6 W.	Clay	220	6-2-60	56	9-3	.09	.00	4.8	1.6	217	1.6	580	0	7.6	7.0	2.2	.0	537	18	0	889	7.2	
Pennsylvanian - Mansfield Formation - Unit 2																								
NE ₁	NE ₁ , Sec. 26 T. 10 N., R. 6 W.	Clay	40	6-28-63	81	28	3.6	.15	5.6	4.1	13	.4	21	0	19	0-0	.1	18	106	31	14	132	6.3	
NE ₁	NE ₁ , Sec. 30 T. 11 N., R. 5 W.	Clay	100	4-29-58	85	18	31	.18	63	27	31	1.4	383	0	10	20	.2	.1	563	273	0	623	7.2	
SW ₁	SW ₁ , Sec. 2 T. 13 N., R. 7 W.	Clay	150	9-2-60	58	16	.42	.00	91	19	71	4.3	415	0	20	2.3	.4	.0	391	208	0	647	6.8	
NE ₁	NE ₁ , Sec. 38 T. 9 N., R. 7 W.	Clay	241	6-7-57	59	8.4	.14	.00	4.0	2.3	1,470	3.2	1,430	0	9.2	1,400	1.7	.1	3,360	20	0	5,900	8.0	
Pennsylvanian - Linton Formation - Unit 3																								
SE ₁	SE ₁ , Sec. 17 T. 11 N., R. 7 W.	Clay	112	6-1-60	80	34	.13	.06	89	24	26	2.1	400	0	2.2	2.0	.3	1.2	389	271	0	583	7.3	
NE ₁	NE ₁ , Sec. 21 T. 11 N., R. 8 W.	Vigo	212	12-19-57	56.5	9-3	.28	.02	5.2	2.8	253	2.4	584	35	.8	20	2.7	.1	622	24	0	1,000	8.8	
NE ₁	NE ₁ , Sec. 36 T. 10 N., R. 9 W.	Vigo	365	6-27-63	57	7.9	.24	.01	.3	1.2	693	4.0	1,240	49	3.6	280	15	1.4	1,640	6	0	2,760	8.7	
Pennsylvanian - Petersburg Formation - Unit 4																								
SE ₁	SE ₁ , Sec. 38 T. 10 N., R. 6 W.	Vigo	75	6-28-63	81	17	3.0	.58	88	43	40	1.1	300	0	68	22	.2	1.2	541	422	12	885	7.4	
SW ₁	SW ₁ , Sec. 4 T. 10 N., R. 6 W.	Vigo	185	6-27-63	63	8.2	.12	.04	.2	.7	365	2.1	800	54	1.6	40	8.9	.1	872	4	0	1,430	8.9	
SE ₁	SE ₁ , Sec. 5 T. 10 N., R. 8 W.	Vigo	285	6-27-63	59	7.6	.29	.02	.8	1.4	612	4.1	1,540	69	4.8	280	13	.6	1,960	8	0	3,280	8.7	
Pennsylvanian - Sheburn Formation - Unit 6																								
NE ₁	NE ₁ , Sec. 14 T. 10 N., R. 6 W.	Vigo	81	6-2-60	88	24	.02	.27	71	30	47	1.2	458	0	18	13	.2	.6	431	301	0	702	7.1	
Quaternary - Wabash River Valley Aquifer - confined portion																								
SE ₁	NE ₁ , Sec. 1 T. 12 N., R. 10 W.	Vigo	67	6-2-60	56	21	2.4	.15	93	39	18	1.8	343	0	12	3.5	.8	.1	482	365	0	811	6.5	
NE ₁	NE ₁ , Sec. 14 T. 10 N., R. 8 W.	Vigo	76	6-2-60	59	19	2.9	.11	102	37	12	.9	380	0	109	4.5	.3	.8	476	407	95	745	7.0	
NE ₁	NE ₁ , Sec. 20 T. 12 N., R. 6 W.	Vigo	79	4-18-58	--	16	1.3	.08	64	25	3.3	.2	394	0	23	2.5	.2	.1	285	263	14	487	7.5	

Quaternary - Wabash River Valley Aquifer - unconfined portion

SW ₁ T. 11 N., R. 9 W.	Vigo	72	12-10-57	59	13	.18	.08	80	28	7.6	1.2	276	0	110	4.5	.1	.9	389	328	102	622	7.6
SW ₂ T. 13 N., R. 9 W.	Vigo	93	4-18-52	--	11	1.7	.03	70	24	6.2	1.6	226	0	67	6.0	.1	.2	320	272		512	7.7
SW ₃ T. 13 N., R. 9 W.	Vigo	100	4-11-56	66	16	.18	.05	112	35	12	2.2	278	0	175	10	.1	12	511	423	196	779	7.4
SW ₄ T. 13 N., R. 9 W.	Vigo	112.5	7-26-55	59	10	.18	.16	62	16	3.2	.7	214	0	52	2.6	.2	1.5	254	222	47	451	7.8
SW ₅ T. 12 N., R. 9 W.	Vigo	131	7-28-53	61	13	.19	.04	106	53	33	4.4	302	0	137	32	.00	18	508	402	0	875	7.7

Quaternary - Eol River Valley Aquifer

SW ₁ T. 9 N., R. 7 W.	Clay	82	5-7-57	57	22	6.4	.11	79	19	6.9	.4	234	0	6.6	3.0	.1	3.0	316	275	2	501	7.2
SW ₂ T. 13 N., R. 9 W.	Clay	80	6-2-60	60	16	1.9	.00	108	38	39	1.2	470	0	119	5.5	.4	4.0	589	436	50	684	6.8
SW ₃ T. 13 N., R. 9 W.	Clay	102	4-29-56	53	17	1.9	.00	55	21	5.1	.8	266	0	5.4	1.5	.1	.3	248	224	0	419	8.0


TABLE 4. -- SIGNIFICANCE OF DISSOLVED MINERAL CONSTITUENTS AND PROPERTIES OF GROUND WATER.

Constituents or property	Significance
Iron (Fe) -----	Excessive amounts cause: "red water"; yellowish- or reddish-brown laundry fixture stains; alloy iron bacteria growths in wells, pipes and tanks; bitter taste. The U. S. Public Health Service recommends that iron should not exceed 0.3 ppm on the basis of taste and laundry use.*
Manganese (Mn) -----	Similar to iron. Causes dark stains. U. S. Public Health Service recommends that the manganese concentration should not exceed 0.05 ppm.*
Calcium (Ca) and Magnesium (Mg) -----	Principal cause of hardness. (See Hardness.)
Sodium (Na) -----	High concentrations may cause water to be unsuitable for agriculture.
Potassium (K) -----	Chemically similar to sodium.
Bicarbonate (HCO ₃) and Carbonate (CO ₃) -----	Principal alkaline factors in water. (See Hardness.)
Sulfate (SO ₄) -----	In combination with calcium forms hard scale in boilers. In high concentrations imparts bitter taste to water. U. S. Public Health Service recommends that the sulfate concentrations should not exceed 250 ppm, based largely on taste.*
Chloride (Cl) -----	In high concentrations chloride increases the corrosiveness of water and imparts a salty taste. The U. S. Public Health Service recommended maximum is 250 ppm, based upon taste.*
Fluoride (F) -----	In low concentrations fluoride reduces tooth decay. In higher concentrations tooth mottling or bone damage may occur. The U. S. Public Health Service recommendations are based on the annual average of maximum daily air temperatures.* For the Vigo-Clay area the recommended limits are: minimum - 0.8 ppm, optimum - 1.0 ppm, maximum - 1.3 ppm.
Nitrate (NO ₃) -----	A high nitrate concentration may cause methemoglobinemia (blue-baby disease) in infants. The U. S. Public Health Service recommends a limit of 45 ppm.*
Dissolved Solids -----	U. S. Public Health Service recommends a limit of 500 ppm.*
Hardness as CaCO ₃ -----	Causes soap loss by formation of scum. Primarily due to calcium and magnesium. When these constituents are combined with bicarbonate they cause temporary or permanent hardness. A widely used hardness scale is: 60 ppm, soft; 81 to 120 ppm, moderately hard; 121 to 200 ppm, hard; more than 200 ppm, very hard.
Hydrogen-ion concentration (pH) -----	Measure of alkalinity-acidity. 0 to 7 denotes decreasing acidity; 7 neutrality; 7 to 14 increasing alkalinity.

* Public Health Service Publication No. 936, 1962.

HARDNESS CONCENTRATION*

(PARTS PER MILLION)

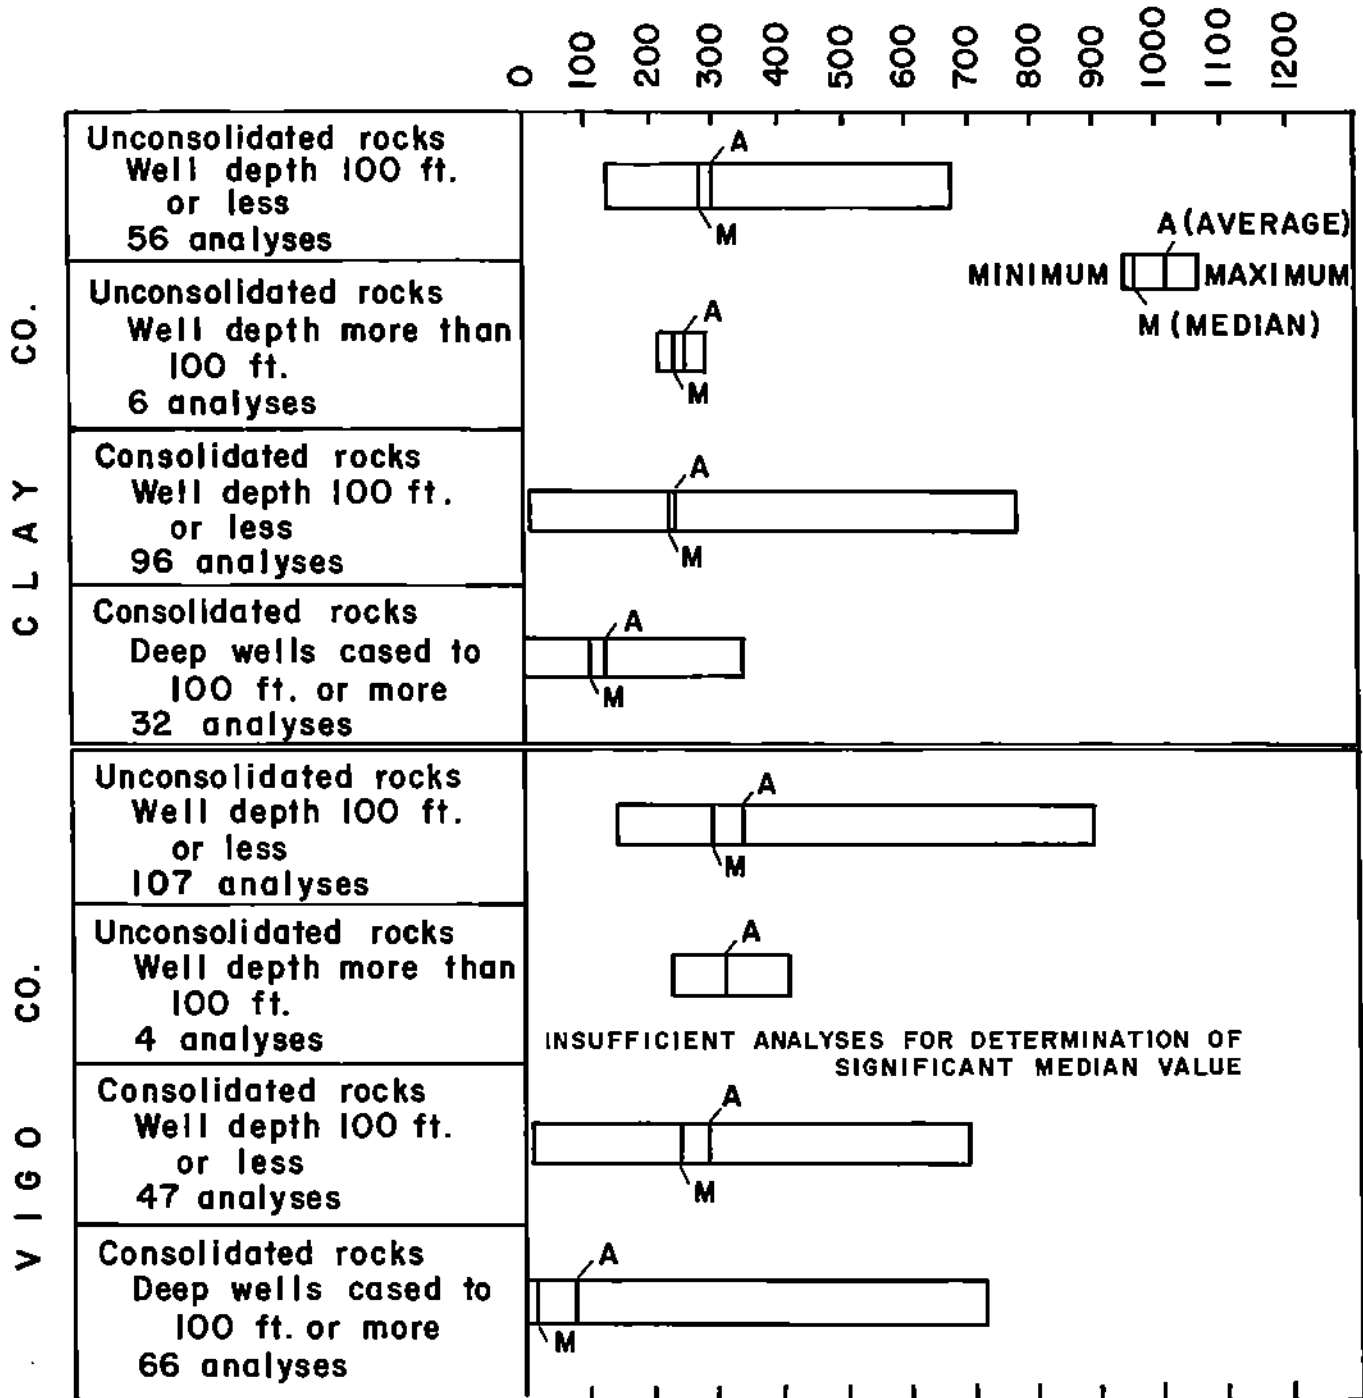

* Total hardness as CaCO₃

FIGURE 13.-- Hardness concentrations in the consolidated and unconsolidated rocks of Vigo and Clay Counties.

**BICARBONATE CONCENTRATION
(PARTS PER MILLION)**

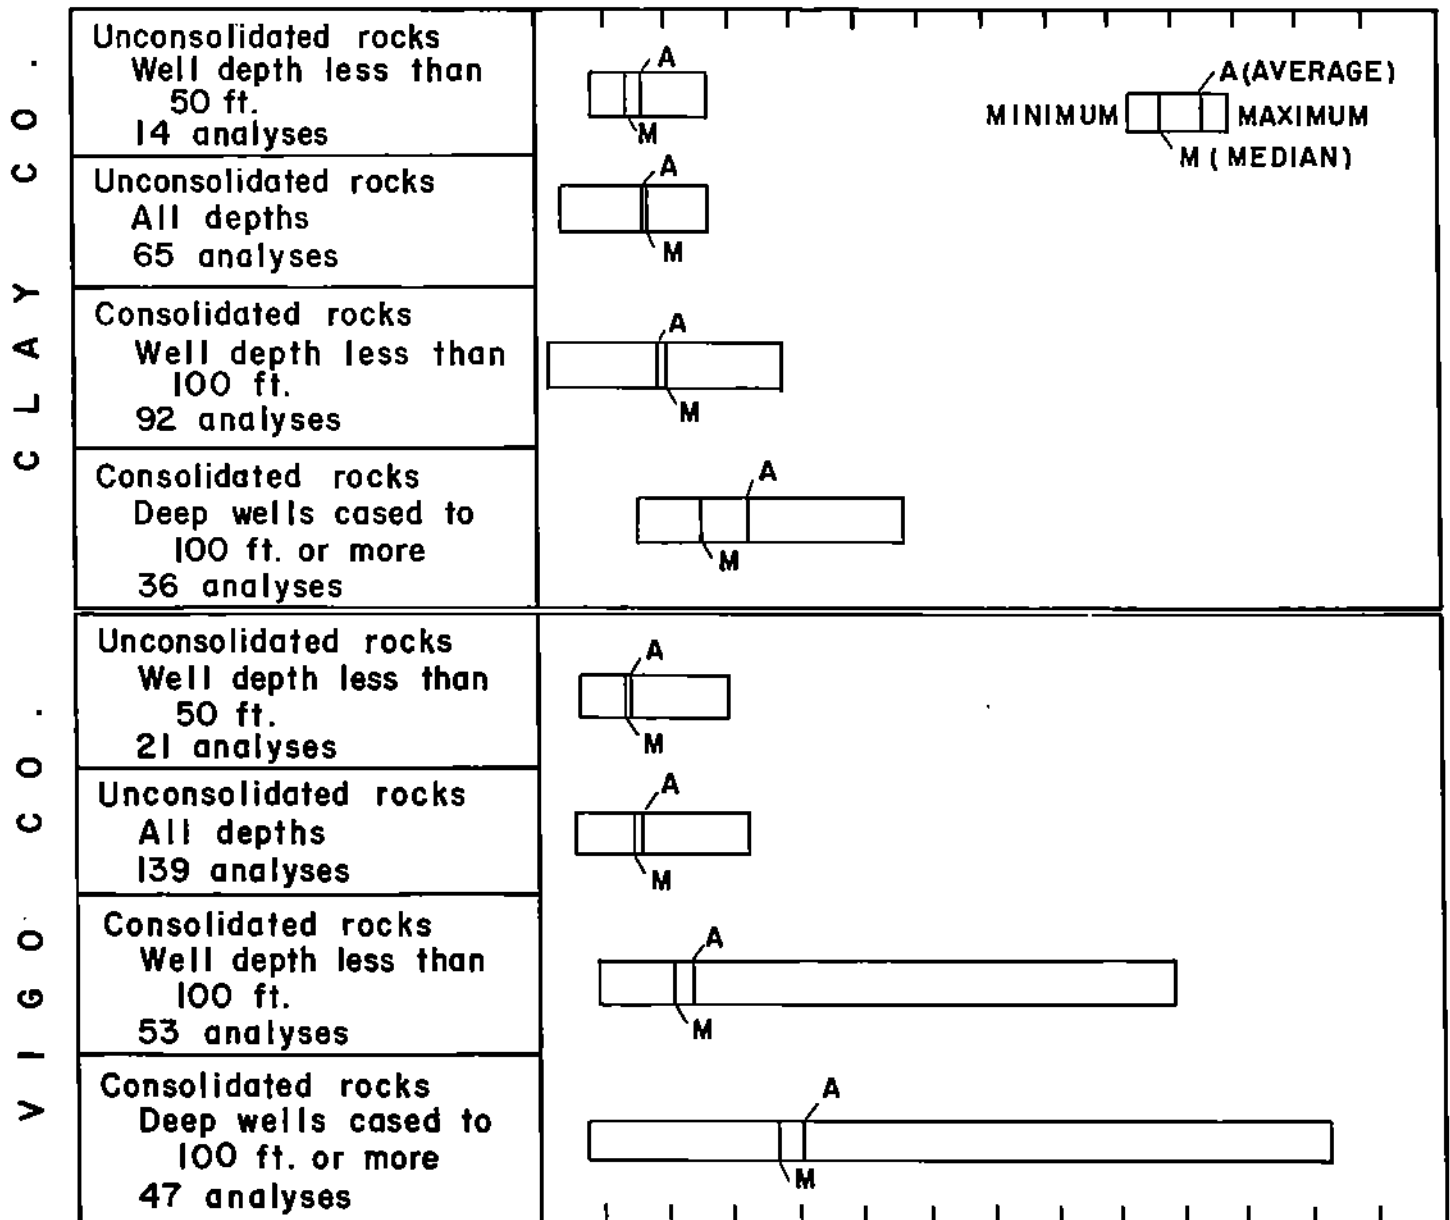


FIGURE 14.-- Bicarbonate concentrations in the consolidated and unconsolidated rocks of Vigo and Clay Counties.

Sulfate

Much of the sulfate in ground water is derived from the oxidation of sulfide minerals in the rocks. Coal-mining operations frequently produce large quantities of sulfuric acid by exposing pyrite-bearing rocks to air in the presence of water. The acid mine-drainage is ultimately neutralized by chemical reaction with rock material and bicarbonate water, producing metallic sulfates in solution. Some of the smaller streams in the area contain sulfate concentrations at low flow that exceed 1,000 parts per million. As there is an interchange of water between valley alluvium and streams, it would be expected that the median sulfate concentration of water from the unconsolidated rocks would be higher than in the case of the consolidated rocks. (See fig. 15). The few bedrock wells which yield excessive sulfate can be explained by the oxidation of sulfide minerals in the vicinity of the well bore and are not, therefore, necessarily attributable to mining.

Fluoride

Fluoride concentrations in water from consolidated and unconsolidated rocks of the Vigo-Clay County area are shown in figure 16. Water produced from the consolidated rocks shows a definite relationship between hardness and fluoride concentration--the hard waters having a deficiency and the soft waters having an excess. This phenomenon can be readily explained if it is assumed that most of the fluoride is derived from calcium and magnesium fluoride minerals disseminated throughout the rocks. If a water poor in calcium and magnesium ions, but rich in sodium and potassium ions, is in contact with these minerals, the minerals will tend to be dissolved. In the section on hardness it was shown that hardness decreases with depth in the consolidated rocks and that deep wells in Middle and Upper Pennsylvanian aquifers of Vigo County generally yield softer water than those in Lower Pennsylvanian aquifers in Clay County. The latter condition would explain the higher fluoride concentrations for Vigo County.

Chloride

Chloride concentrations in water from wells in the Vigo-Clay County area range from near zero to several hundred ppm. The upward migration of sodium chloride waters from deep brine-bearing rocks is the most probable cause of the higher concentrations. In some instances, migration has been intensified by the drilling of oil and gas wells, affording an easy path for upward movement. In wells bottomed in the bedrock beneath the Wabash River, salty water can probably be encountered at depths of slightly over 100 feet. In the upstream portions of tributaries the depth to salt water beneath stream level is usually in the 150- to 350-foot range.

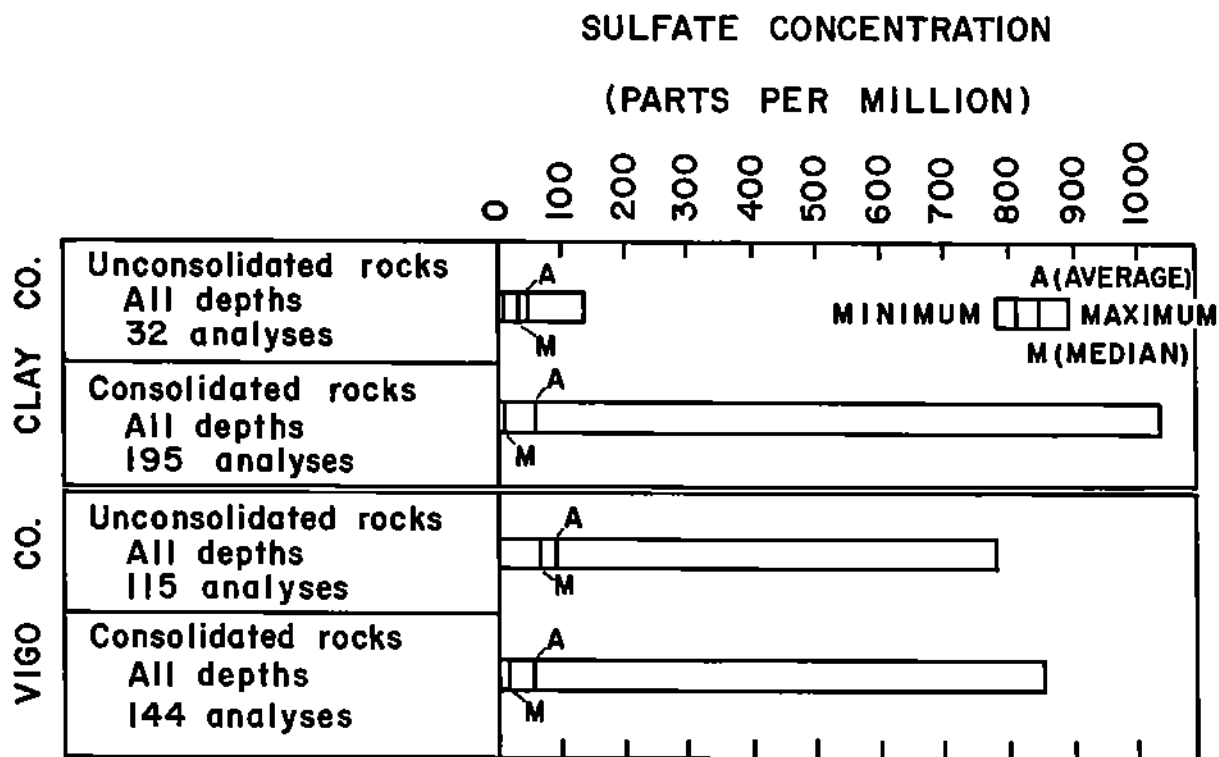


FIGURE 15.-- Sulfate concentrations in the consolidated and unconsolidated rocks of Vigo and Clay Counties.

**FLUORIDE CONCENTRATION
(PARTS PER MILLION)**

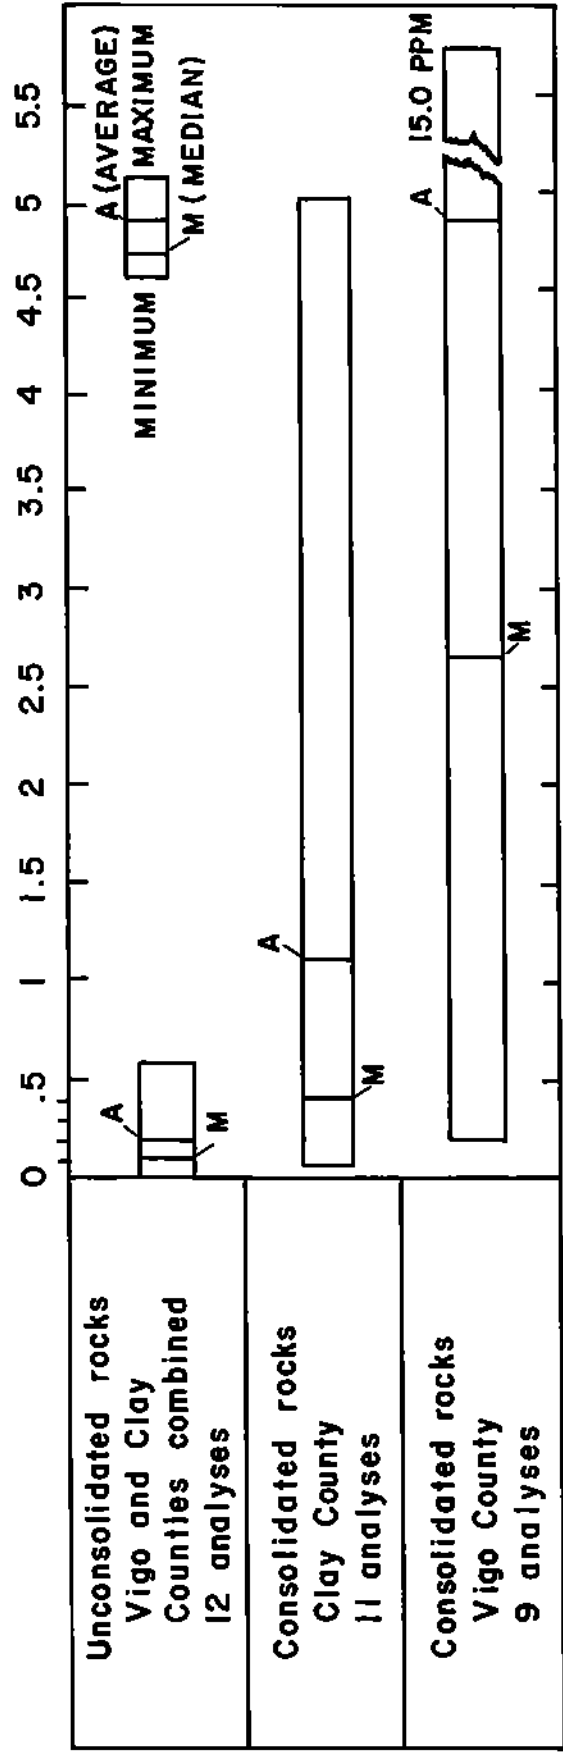


FIGURE 16.--Fluoride concentration in the consolidated and unconsolidated rocks of Vigo and Clay Counties.

Most of the natural seepage of salt water is discharged at the bedrock surface in valleys where it is diluted rapidly to less than the recommended maximum concentration. In the "Maryland Heights" area south of Terre Haute, excessive chloride has been noted in alluvial wells having depths of 48 to 76 feet. This occurrence appears to be due to contamination from nearby oil fields.

SUMMARY AND CONCLUSIONS

Vigo and Clay Counties lie principally in the Wabash Lowland physiographic province of west-central Indiana. Consolidated and unconsolidated rocks of Mississippian, Pennsylvanian and Quaternary ages immediately underlie the area.

The Pennsylvanian rocks of the Vigo-Clay County area contain six sandstone bodies which are extensive enough to be considered important aquifers. These aquifers are designated units 1 through 6 in accordance with their stratigraphic position and occur at regular intervals throughout the Pennsylvanian rocks. Yields from wells in these aquifers average 6.6 gpm and rarely exceed 20 gpm. Due to wide local variation in thickness, no regional value for transmissibility is given, however, this value may be calculated locally. The total amount of water in storage in the mapped areas of all bedrock aquifers in the area is approximately 523 million gallons, and the estimated potential recharge is 7 mgd. The total estimated current withdrawal is 1.8 mgd.

Aquifers in the consolidated rocks are generally thin and of relatively small permeability. Yields from wells in these aquifers are, therefore, correspondingly low. The amount of water normally produced from these wells is adequate for farm, domestic, small industrial, and, in some cases, small municipal supplies. Any attempt to obtain the production necessary to supply large industries or large municipalities would seem to be highly impractical. The importance of the consolidated rock aquifers, however, lies in the fact that over much of the two-county area they constitute the sole source of potable ground water.

The unconsolidated deposits in the Vigo-Clay area are mostly Pleistocene in age and yield water chiefly from coarse-textured sand and gravel deposits. These sand and gravel aquifers occur almost exclusively as glacial outwash deposited in the Wabash and Eel River valleys. The Wabash River valley aquifer is the best and most extensive aquifer of the entire two-county area. A detailed analysis of the Eel River valley aquifer is not possible due to insufficient data.

The Wabash River valley aquifer forms a single complex hydrologic system which may be subdivided into two major areas--an unconfined area adjacent to the river and a confined area beneath the till to the east. Yields from wells in the unconfined area average 660 gpm with yields as high as 2,700 gpm reported. The estimated regional value of transmissibility is 72,000 gpd per foot. Wells in the confined area yield an average of 25 gpm with maximum yields of 40 to 45 gpm noted. The regional

value of transmissibility is estimated to be 5,100 gpd per foot. The total amount of water in storage in this aquifer in the Vigo-Clay area is approximately 367,800 million gallons and the estimated potential recharge is 68 mgd. The estimated current withdrawal is 22.2 mgd.

The unconfined area of the Wabash River valley sand and gravel aquifer is the most productive of the entire two-county area. However, due to its relatively limited lateral extent, the tremendous amount of potable water stored in this aquifer is available to only a small part of the area and only a fraction of its potential is now being developed. Its potential is considered sufficient as an available source of supply to satisfy the demands of large industries and large municipalities. The potential of the confined area of this aquifer is substantially less than that of the unconfined area but considerably greater than that of the consolidated rock aquifers. Therefore, production from available sources is considered adequate for the requirements of moderate-sized industries and municipalities.

The water from the unconsolidated rocks and shallow consolidated rocks is usually a calcium bicarbonate water, whereas the water from deep wells in the consolidated rocks is a sodium bicarbonate water. The mineral content of water in the consolidated rocks generally increases with depth. At depths from about 100 to 350 feet below stream level, water containing excessive chloride is frequently encountered. Excessive fluoride concentrations are common in wells which yield very soft water.

GLOSSARY

Hydraulic Coefficients (after Ferris and others, 1962)

Permeability, Field Coefficient of.--Measure of a material's capacity to transmit water; expressed as rate of flow of water in gallons per day through a cross-sectional area of 1 square foot under a hydraulic gradient of 1 foot per foot at the prevailing water temperature.


Storage, Coefficient of.--Volume of water released from or taken into storage per unit surface area of the aquifer per unit change in the component of head normal to that surface.

Transmissibility, Coefficient of.--Rate of flow of water, at the prevailing water temperature, in gallons per day, through a vertical strip of the aquifer 1 foot wide extending the full saturated height of the aquifer under a hydraulic gradient of 1 foot per foot.

LITERATURE CITED


- Ferris, J. G., Knowles, D. B., Brown, R. H., and Stallman, R. W., 1962, Theory of aquifer tests: U. S. Geol. Survey Water-Supply Paper 1536-E, 174 p.
- Friedman, S. A., 1960, Channel-fill sandstones in the Middle Pennsylvanian rocks of Indiana: Indiana Dept. Conserv., Geol. Survey Prog. Rept. 23, 50 p.
- _____ 1961, Geology and coal deposits of the Terre Haute and Dennison quadrangles, Vigo County, Indiana: U. S. Geol. Survey Coal Inv. Map C-44.
- Frielinghausen, K. W., 1950, a geologic report of the Lewis quadrangle, Vigo County, Indiana: Ind. Univ., unpublished masters thesis.
- Harrell, Marshall, 1935, Ground water in Indiana: Indiana Dept. Conserv., Div. Geology Pub. 133, 504 p.
- Hutchison, H. C., 1956, Distribution, structure and mined areas of coals in Clay County, Indiana: Indiana Dept. Conserv., Geol. Survey Preliminary Coal Map 6.
- _____ 1958, Geology and coal deposits of the Seelyville quadrangle, Vigo County, Indiana: U. S. Geol. Survey Coal Inv. Map C-27.
- _____ 1960, Geology and coal deposits of the Brazil quadrangle, Indiana: Indiana Dept. Conserv., Geol. Survey Bull. 16, 50 p.
- Kottlowski, F. E., 1959, Geology and coal deposits of the Coal City quadrangle, Greene, Clay, and Owen Counties, Indiana: U. S. Geol. Survey Coal Inv. Map C-28.
- Leverett, Frank, 1897, The water resources of Indiana and Ohio: U. S. Geol. Survey Eighteenth Annual Report, part 4, p. 419-560.
- _____ 1905, Underground waters of Illinois, Indiana, Ohio, in Underground waters of the eastern United States: U. S. Geol. Survey Water-Supply Paper 114, p. 248-270.
- Malott, C. A., 1922, The physiography of Indiana, in Handbook of Indiana geology: Indiana Dept. Conserv., Pub. 21, part 2, p. 56-256.
- Potter, P. E., and Glass, H. D., 1958, Petrology and sedimentation of the Pennsylvanian sediments in southern Illinois: a vertical profile: Illinois Geol. Survey Rept. Inv. 204, 60 p.
- U. S. Public Health Service, 1962, Public Health Service drinking-water standards revised 1962: U. S. Public Health Service pub. 956, 61 p.
- Waddell, Courtney, 1952, Geology and economic resources of the Shelburn, Fairbanks, Hutton, and Pimento quadrangles: Ind. Univ., unpublished Ph.D. thesis, p.

- Wanless, H. R., 1955, Pennsylvanian rocks of the Eastern Interior Basin: Am. Assoc. Petroleum Geologists Bull., v. 39, p. 1753-1820.
- Wanless, H. R., and Weller, J. M., 1932, Correlation and extent of Pennsylvanian cyclothems: Geol. Soc. America Bull., v. 43, p. 1003-1016.
- Watkins, F. A., Jr., and Jordan, D. G., 1962, Ground-water resources of west-central Indiana: preliminary report, Clay County, Indiana: Indiana Dept. Conserv., Div. Water Resources Bull. 16, 309 p.
- _____ 1963, Ground-water resources of west-central Indiana: preliminary report, Vigo County, Indiana: Indiana Dept. Conserv., Div. Water Resources Bull. 17, 357 p.
- Wayne, W. J., 1956, Thickness of drift and bedrock physiography of Indiana north of the Wisconsin glacial boundary: Indiana Dept. Conserv., Geol. Survey Prog. Rept. 7, 70 p.
- _____ 1958, Glacial geology of Indiana: Indiana Dept. Conserv., Geol. Survey Atlas of Mineral Resources Map 10.
- Weller, J. M., 1930, Cyclical sedimentation of the Pennsylvanian Period and its significance: Jour. Geology, v. 38, p. 97-135.
- Wier, C. E., 1950, Geology and coal deposits of the Jasonville quadrangle, Clay, Greene, and Sullivan Counties, Indiana: U. S. Geol. Survey Coal Inv. Map C-1.
- _____ 1952, Distribution, Structure and mined areas of coals in Vigo County, Indiana: Indiana Dept. Conserv., Geol. Survey Preliminary Coal Map 1.
- Wier, C. E., and Gray, H. H., 1961, Geologic map of the Indianapolis 1°x 2° quadrangle, Indiana and Illinois: Indiana Dept. Conserv., Geol. Survey.

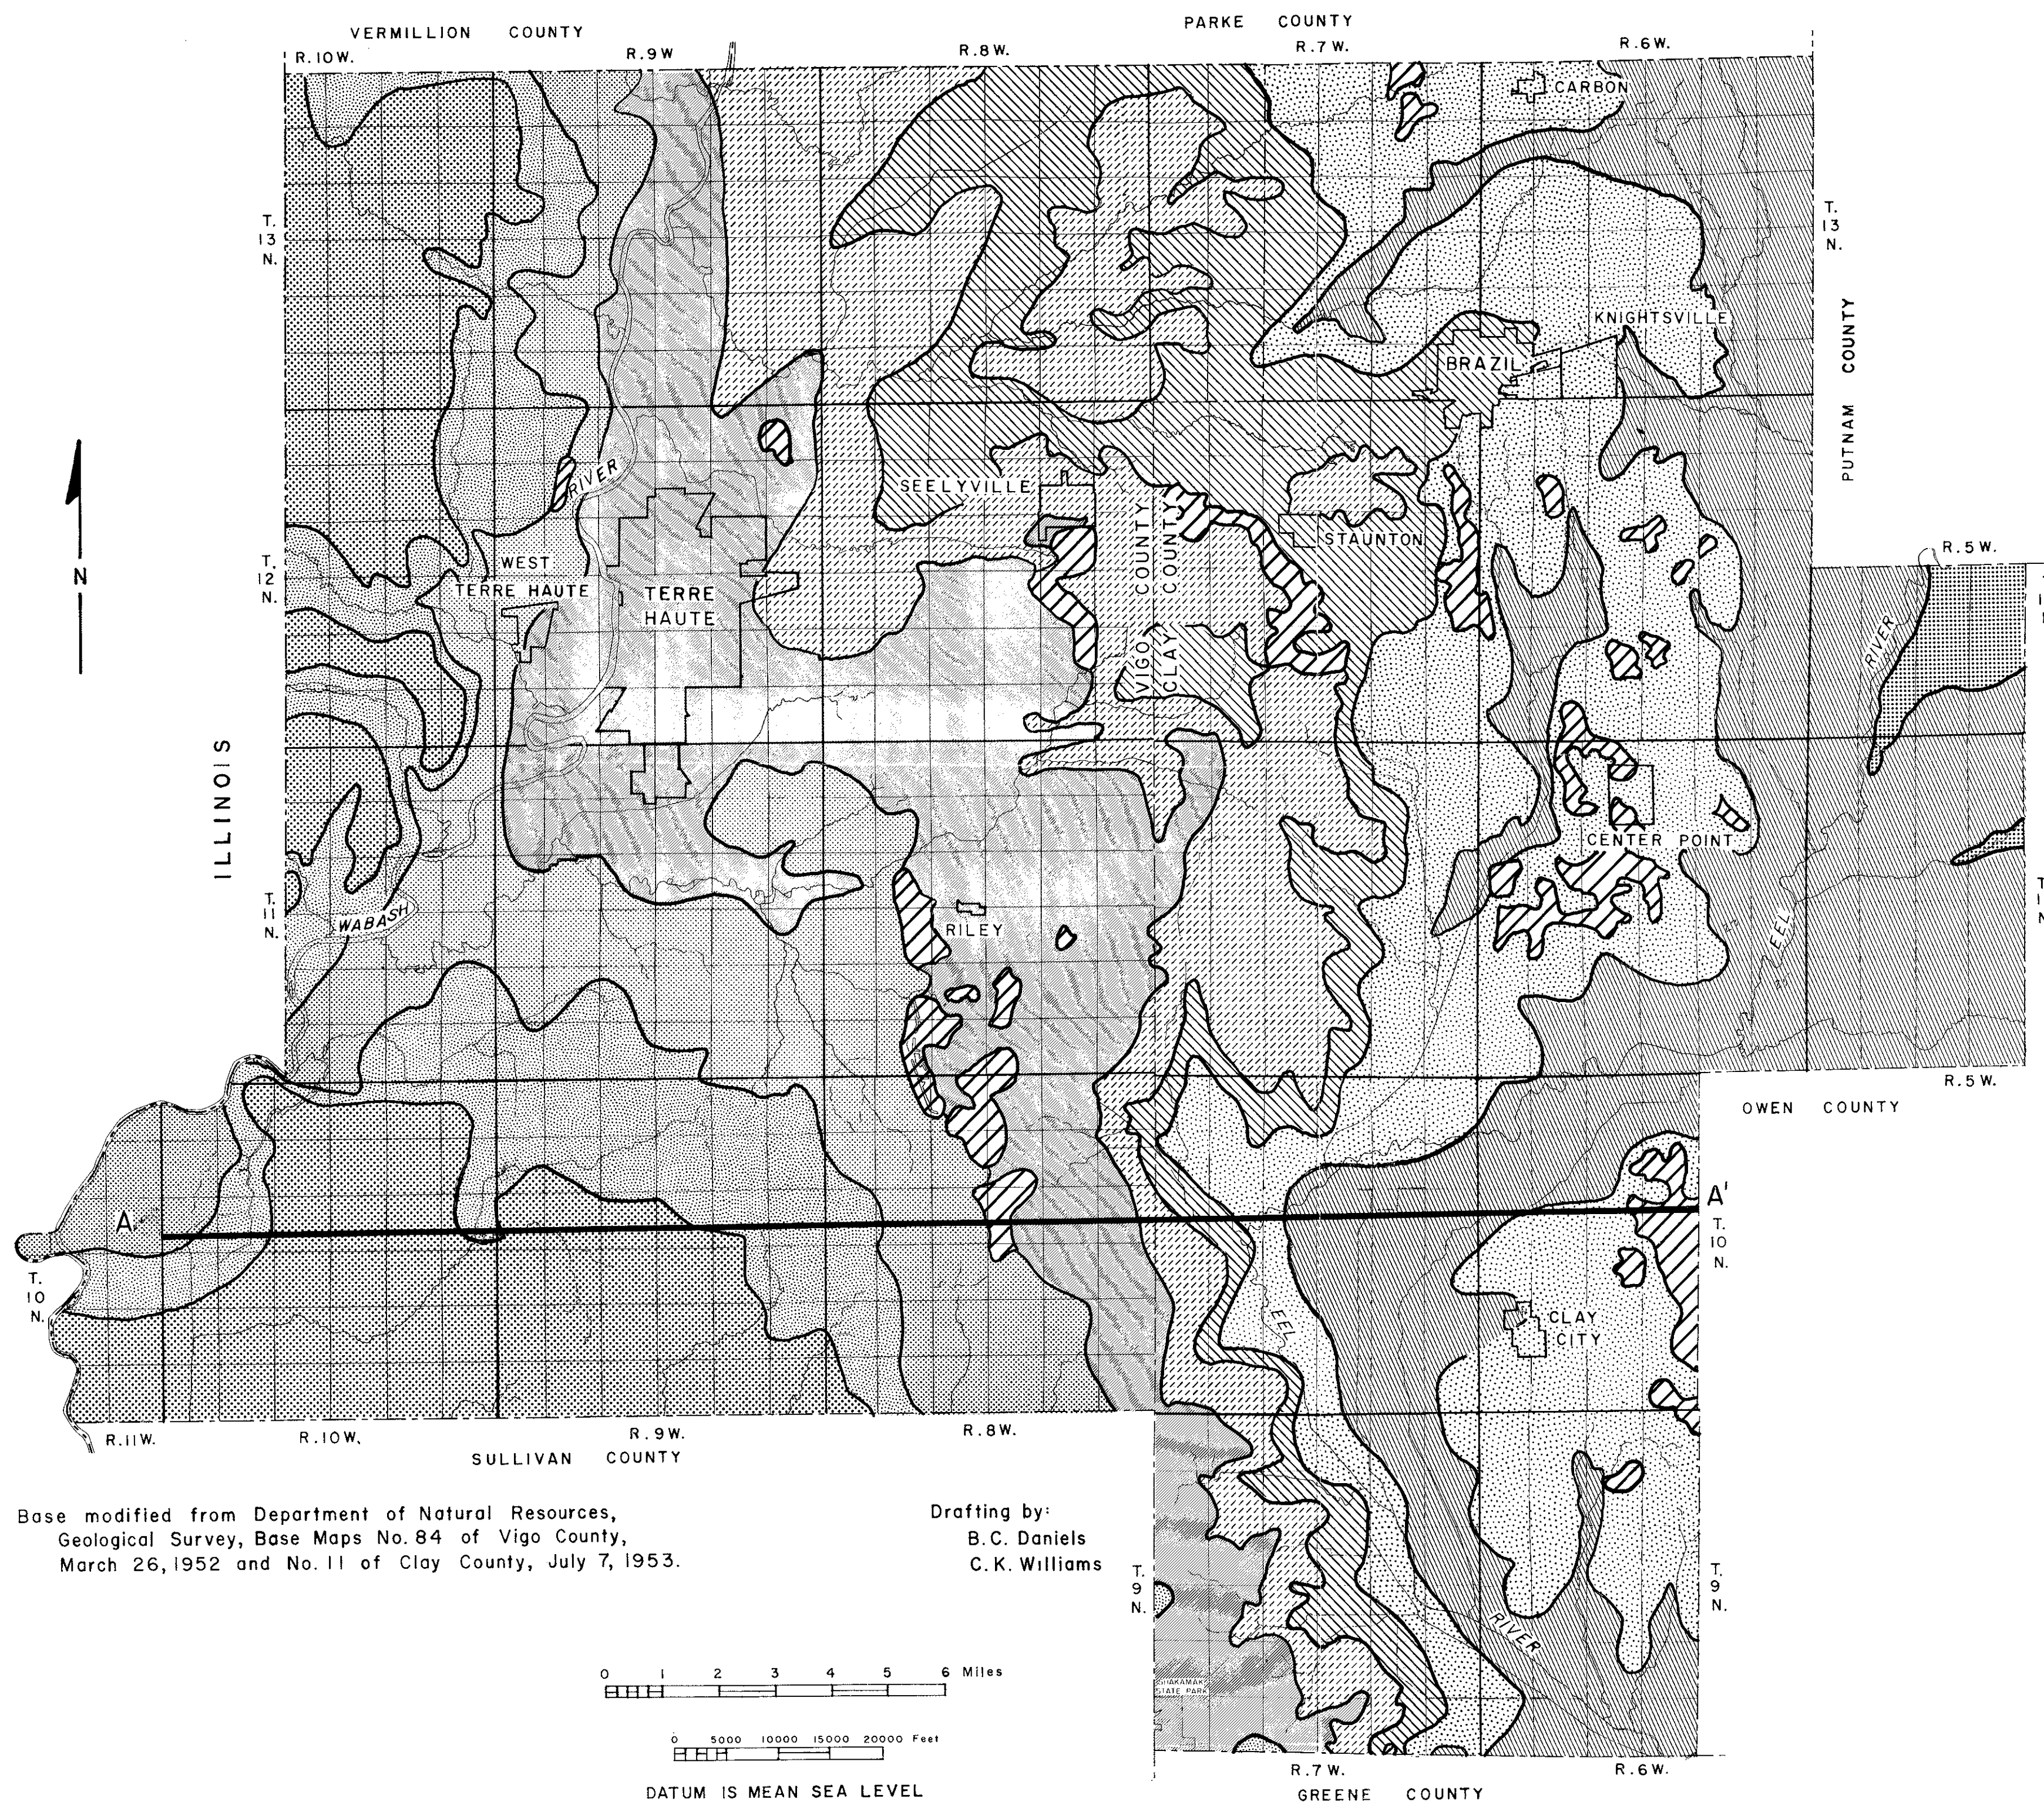


Base modified from Department of Natural Resources,
Geological Survey, Base Maps No. 84 of Vigo County,
March 26, 1952 and No. 11 of Clay County, July 7, 1953.

Drafting by:
B. C. Daniels
C. K. Williams

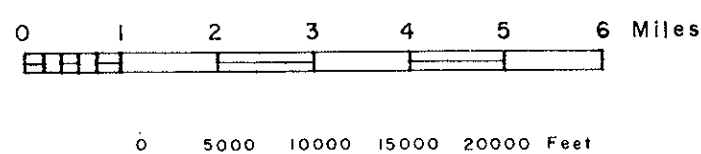

DATUM IS MEAN SEA LEVEL
by L. W. Cable


Geology in part after Friedman, 1961; Frielinghausen, 1950;
Hutchison, 1956, 1958, 1960; Kottowski, 1959; Waddell,
1952; Wier, 1950, 1952; and Wier and Gray, 1961.

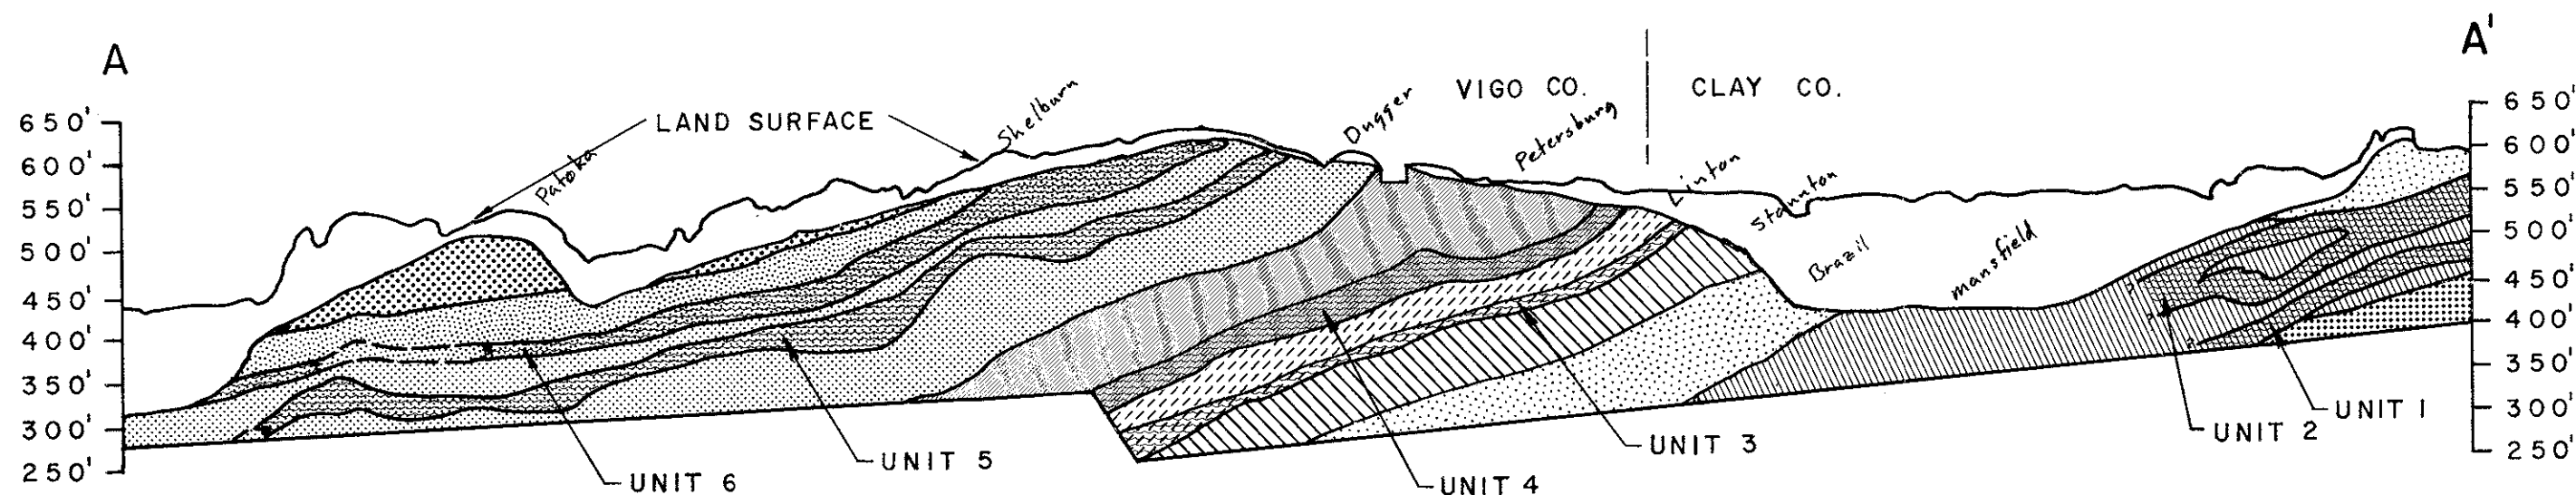


GENERALIZED GEOLOGIC SECTION

BEDROCK GEOLOGIC MAP OF VIGO AND CLAY COUNTIES, INDIANA

EXPLANATION

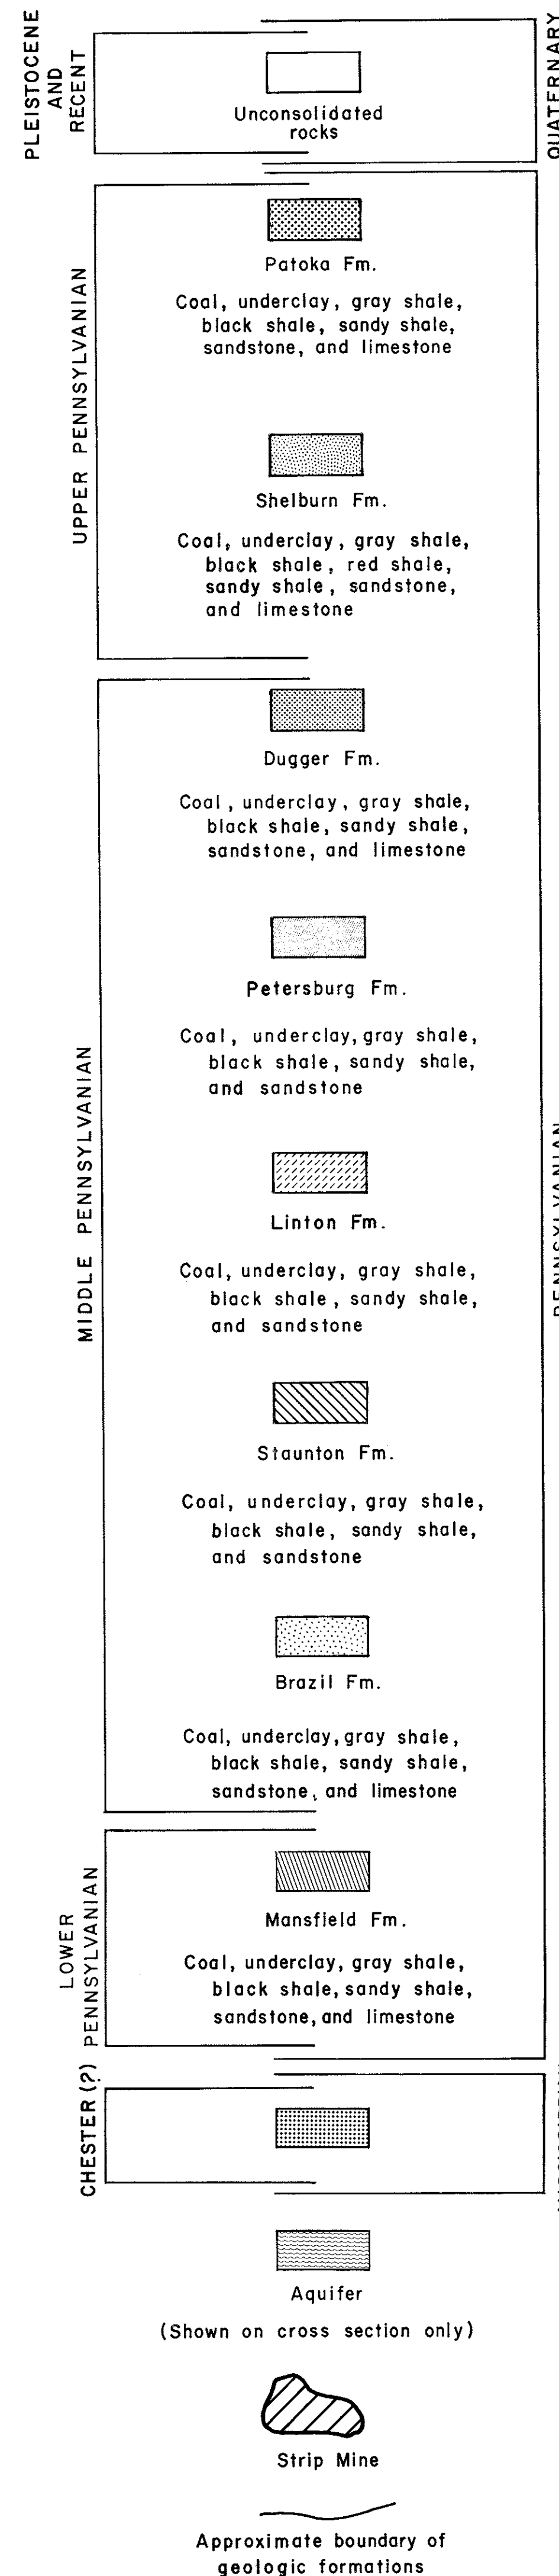

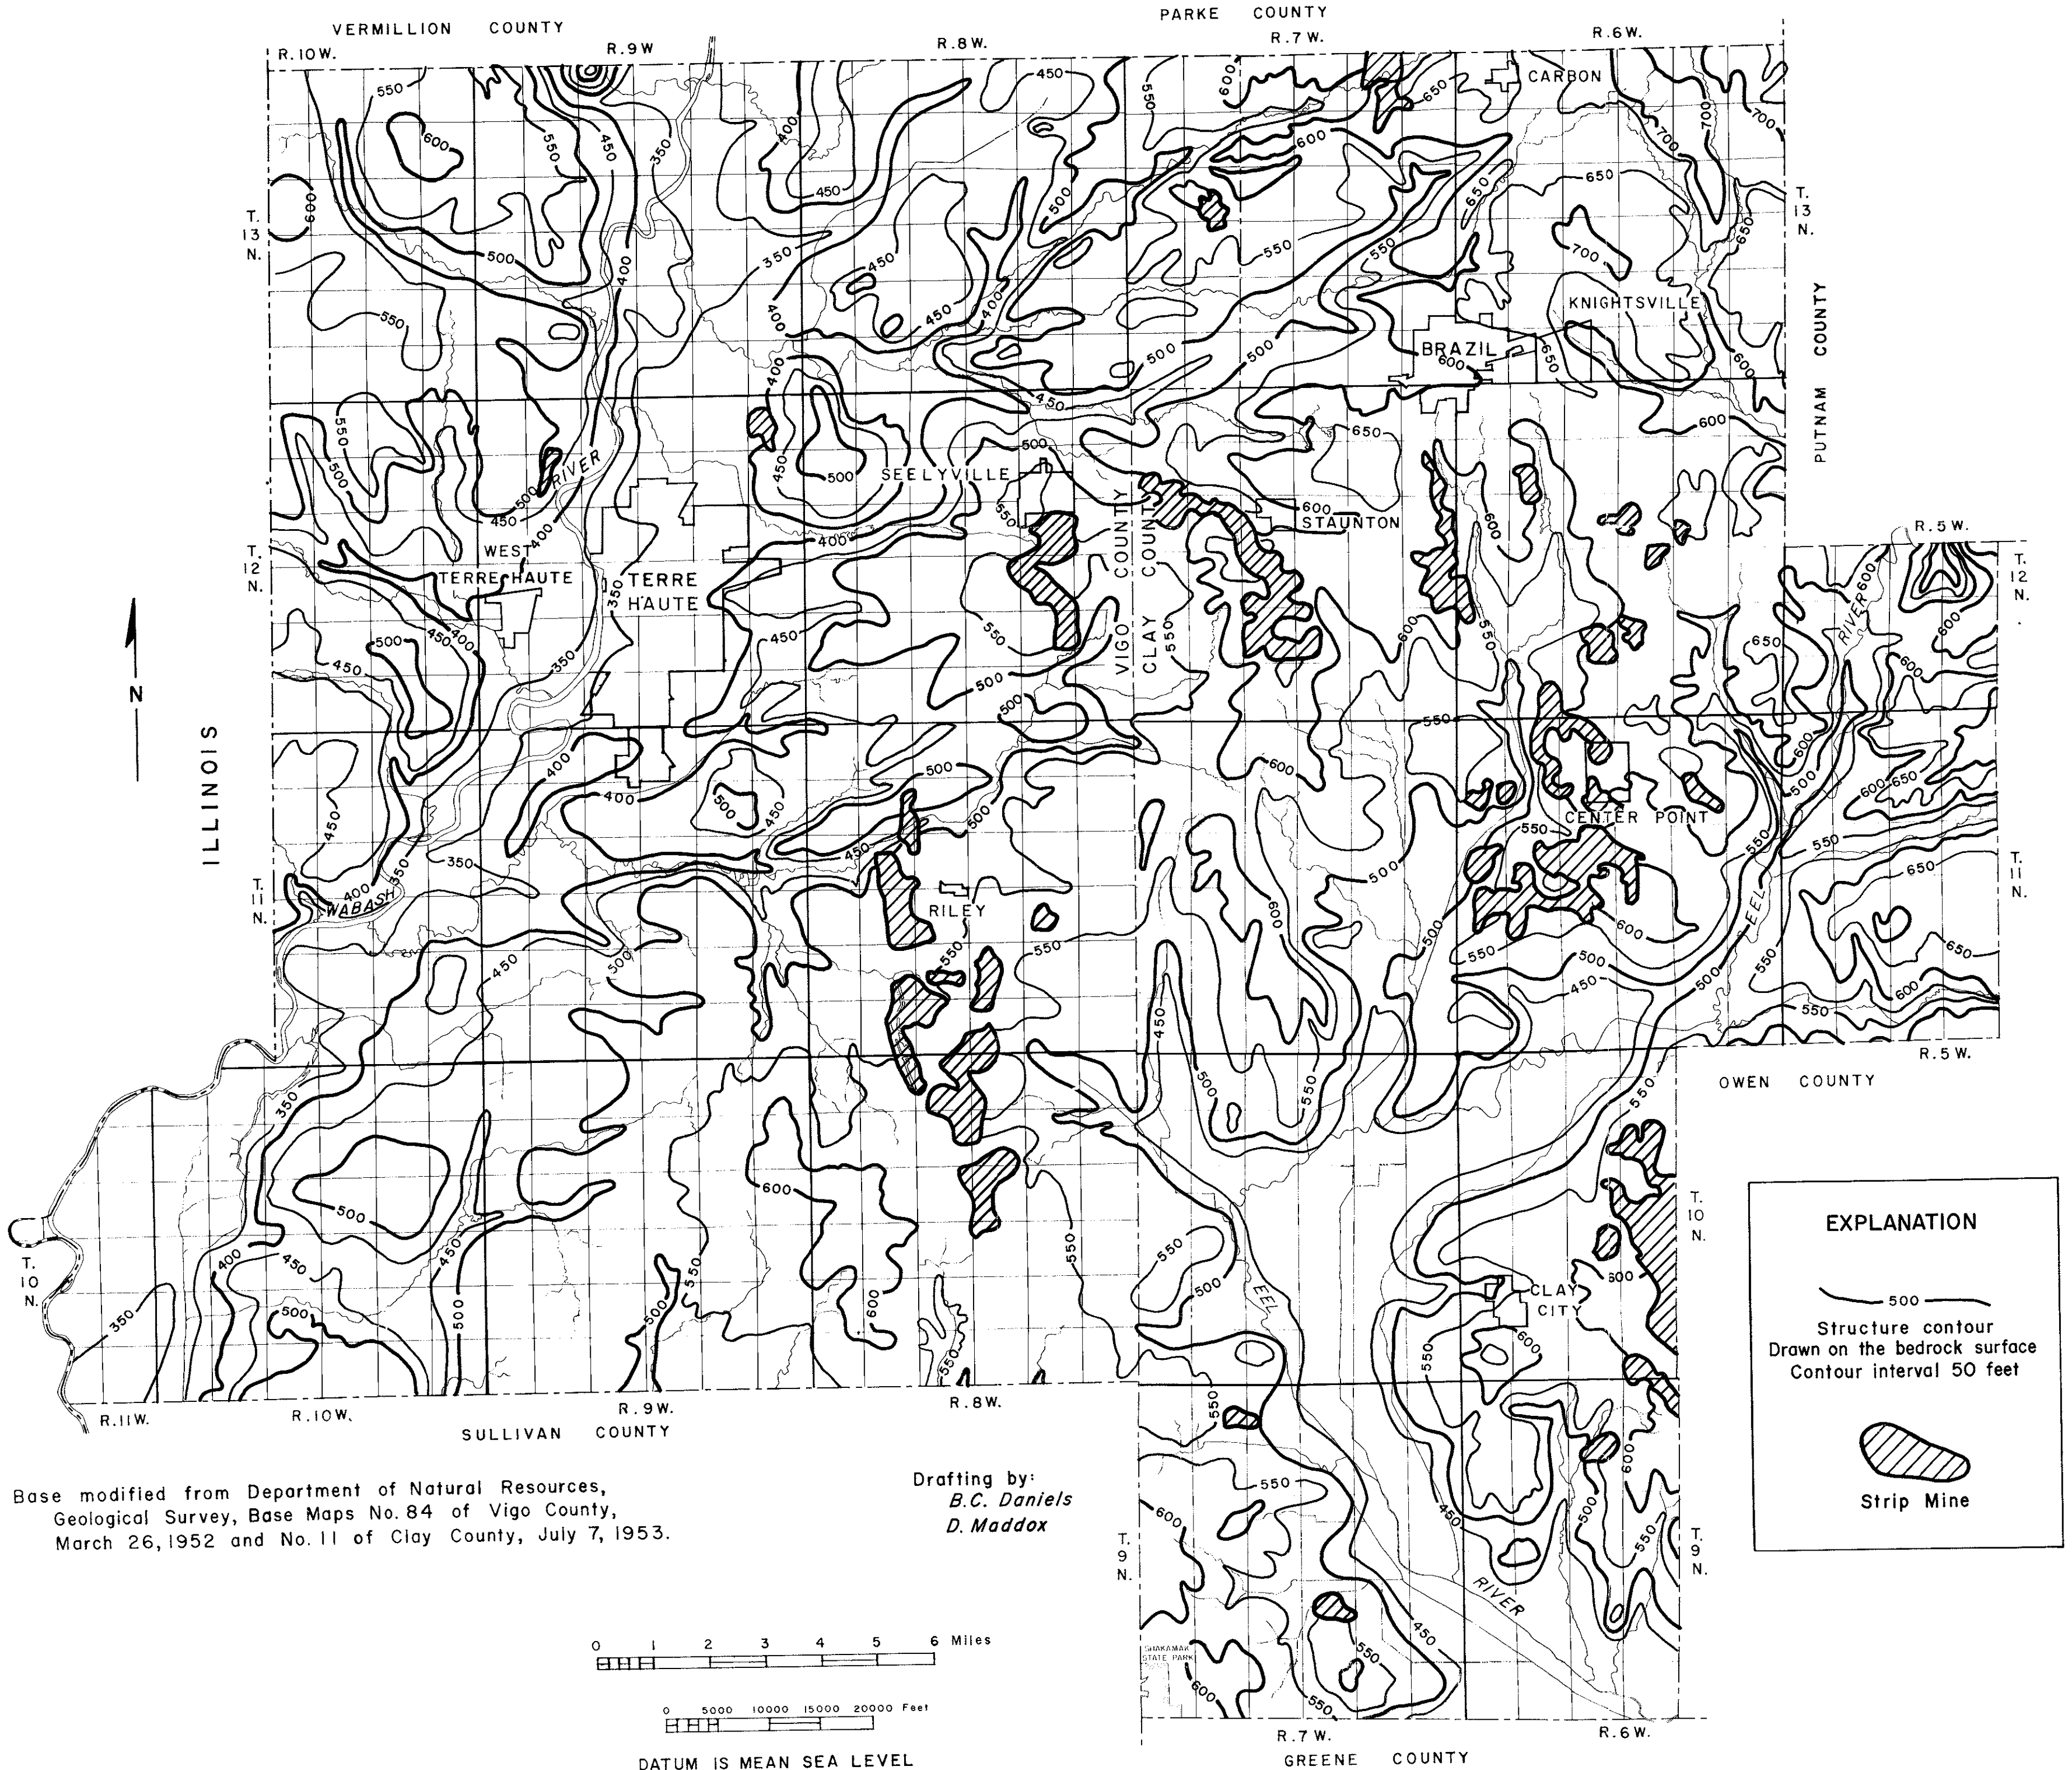

Base modified from Department of Natural Resources,
 Geological Survey, Base Maps No. 84 of Vigo County,
 March 26, 1952 and No. 11 of Clay County, July 7, 1953.

Drafting by:
B. C. Daniels
D. Maddox


0 1 2 3 4 5 6 Miles

0 5000 10000 15000 20000 Feet

DATUM IS MEAN SEA LEVEL

by L. W. Cable

MAP OF VIGO AND CLAY COUNTIES, INDIANA SHOWING TOPOGRAPHY OF BEDROCK SURFACE

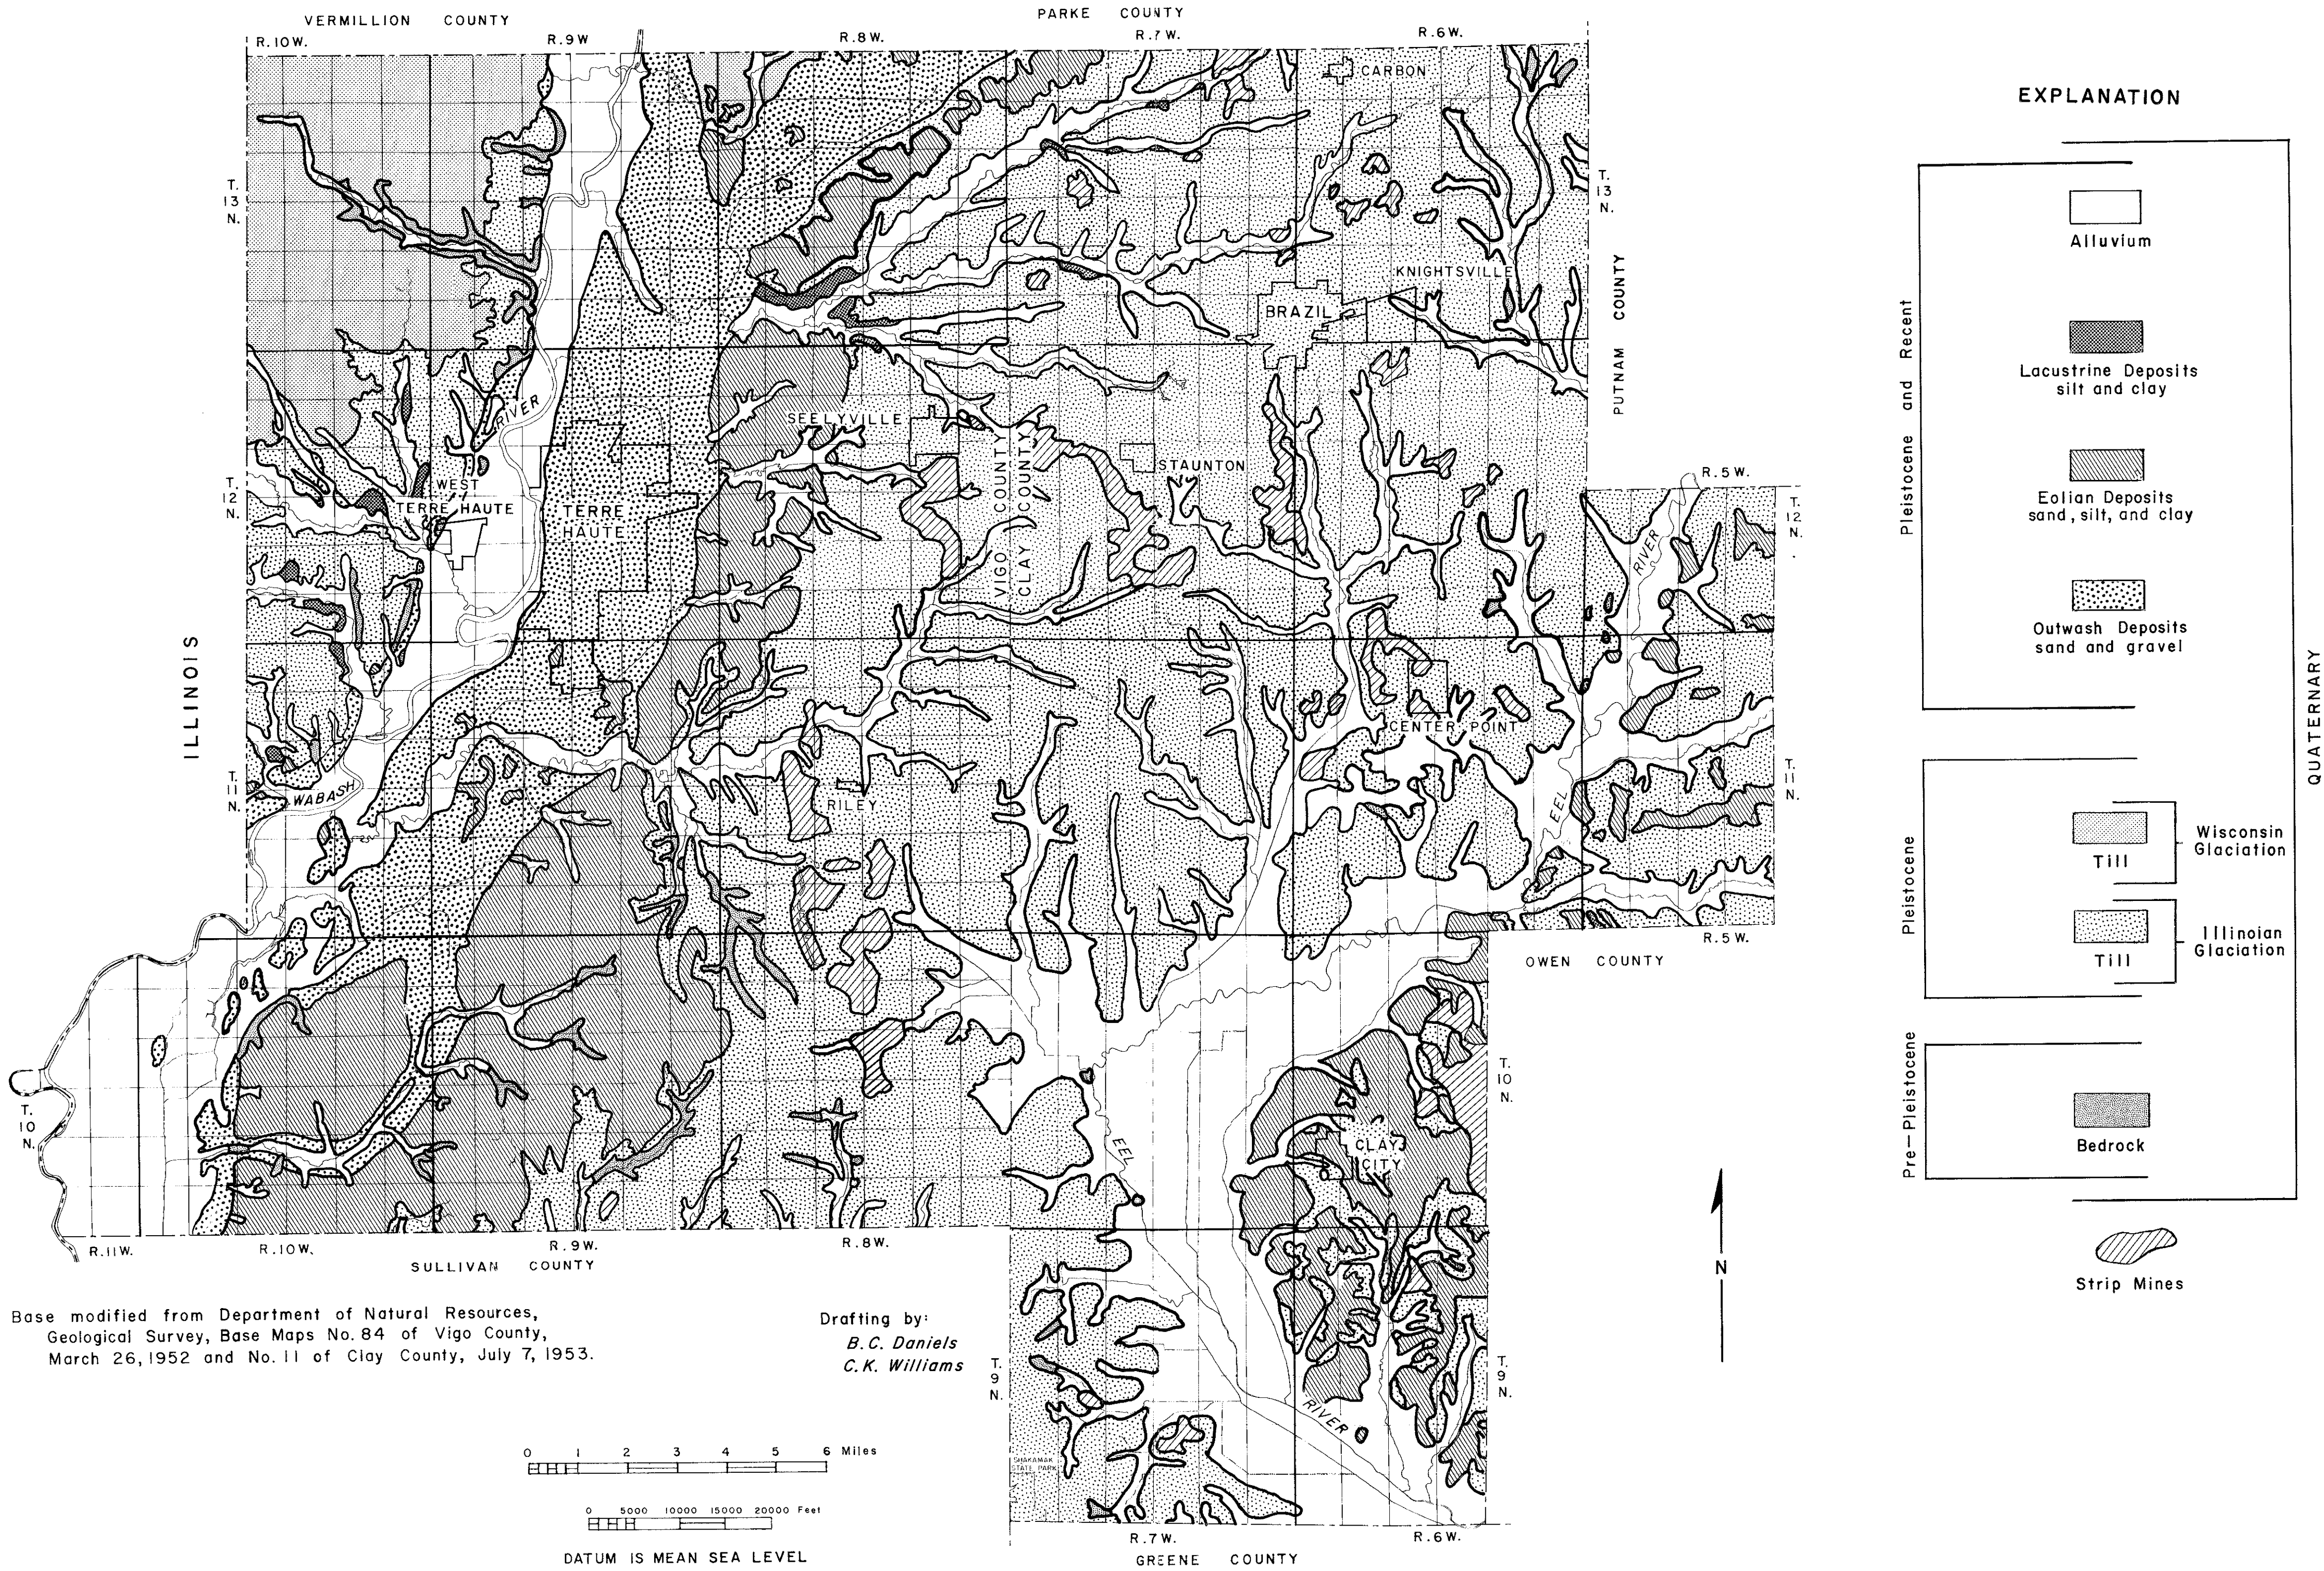

Base modified from Department of Natural Resources,
 Geological Survey, Base Maps No. 84 of Vigo County,
 March 26, 1952 and No. 11 of Clay County, July 7, 1953.

Drafting by:
B.C. Daniels
C.K. Williams

0 1 2 3 4 5 6 Miles


0 5000 10000 15000 20000 Feet

DATUM IS MEAN SEA LEVEL

by D. G. Jordan and L. W. Cable

Geology in part after Friedman, 1961; Frielinghausen, 1950;
 Hutchison, 1958, 1960; Kottowski, 1959; Waddell, 1952;
 Wayne, 1958; and Wier, 1950.

SURFICIAL GEOLOGIC MAP OF VIGO AND CLAY COUNTIES, INDIANA.

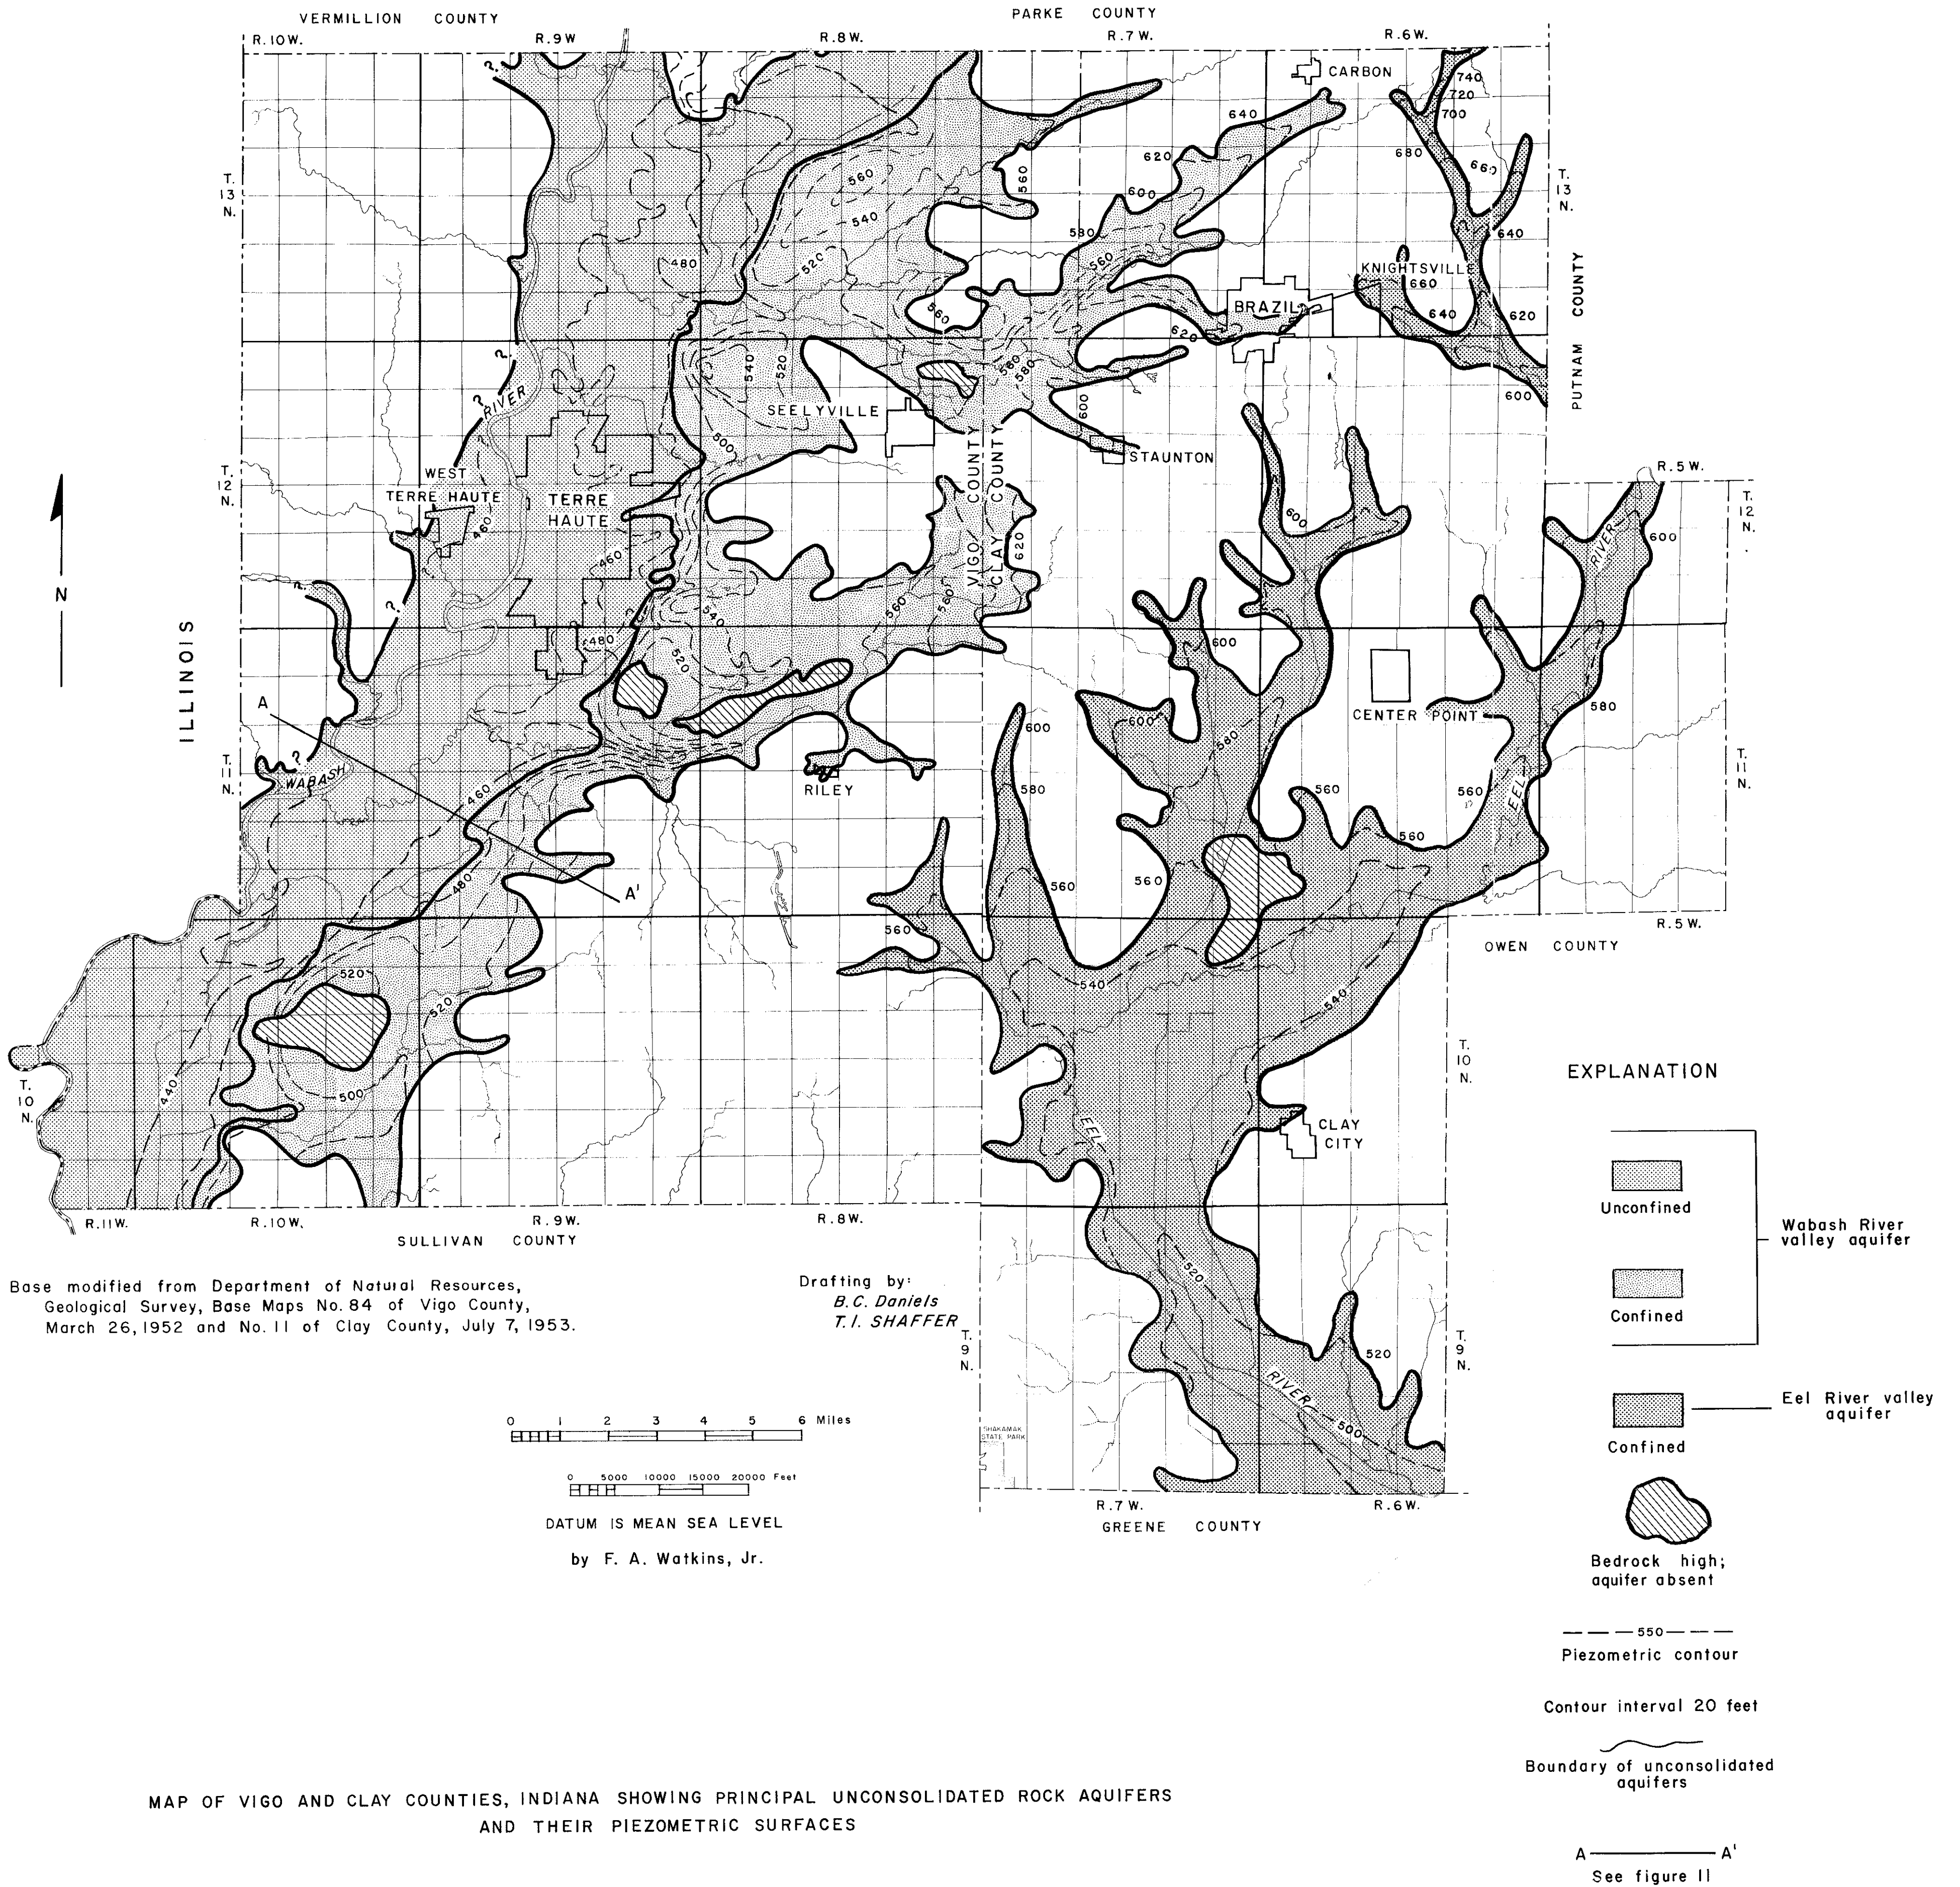

Base modified from Department of Natural Resources,
Geological Survey, Base Maps No. 84 of Vigo County,
March 26, 1952 and No. 11 of Clay County, July 7, 1953.

Drafting by:
B. C. Daniels
T. I. Shaffer








0 1 2 3 4 5 6 Miles

0 5000 10000 15000 20000 Feet

DATUM IS MEAN SEA LEVEL

by F. A. Watkins, Jr.

EXPLANATION

-  Unconfined
-  Confined
-  Confined
-  Bedrock high; aquifer absent
-  Piezometric contour
-  Contour interval 20 feet
-  Boundary of unconsolidated aquifers

A ——— A'
See figure 11

MAP OF VIGO AND CLAY COUNTIES, INDIANA SHOWING PRINCIPAL UNCONSOLIDATED ROCK AQUIFERS
AND THEIR PIEZOMETRIC SURFACES