


LEGEND

- (1) 140 lb/yd² HMA Surface Type A, on
220 lb/yd² HMA Intermediate, Type A
- (2) 6 in. Compacted Aggregate No.53, Base
- (3) Earth Shoulder
- (4) Subgrade Treatment (6" Coarse Aggregate No.53)
- (5) Width and Cross Slope as required

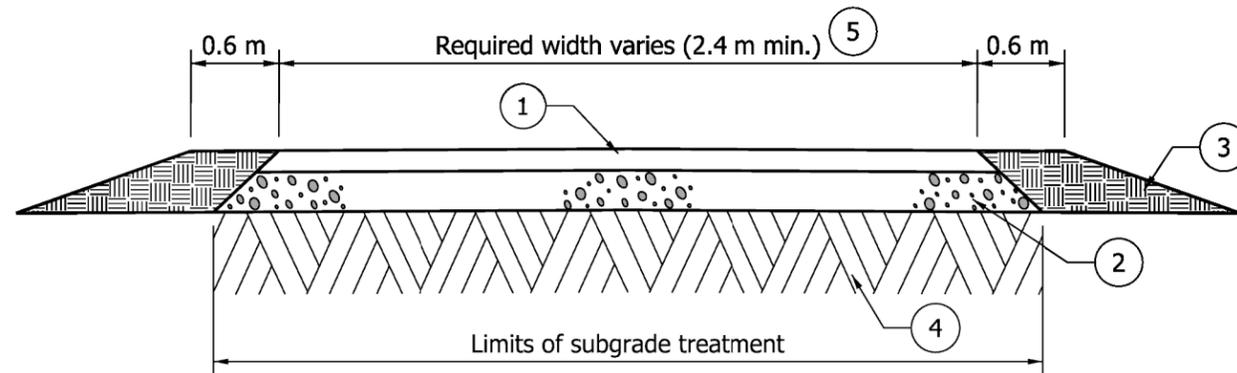

LEGEND

- (1) 75 kg/m² HMA Surface Type A, on
120 kg/m² HMA Intermediate, Type A
- (2) 150 Compacted Aggregate No.53, Base
- (3) Earth Shoulder
- (4) Subgrade Treatment (150 Coarse Aggregate No.53)
- (5) Width and Cross Slope as required

All Dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION

HMA NONMOTORIZED-VEHICLE-USE FACILITY
PAVEMENT SECTION