

**\* Mainline Tangent Section**


- ① 90 kg/m<sup>2</sup> HMA Surface 9.5 mm
- ② 120 kg/m<sup>2</sup> HMA Intermediate 12.5 mm
- ③ Variable (110 kg/m<sup>2</sup> Min.) HMA Intermediate OG19.0 mm Mill Existing PCCP 50mm Left Edge of Pavement to 0 mm at Center of Passing Lane, Mill Shoulder to Match Pavement

**\* Shoulder Tangent Section**

- ④ 90 kg/m<sup>2</sup> HMA Surface 9.5 mm on Variable HMA Intermediate 19.0 mm
- ⑤ Compacted Aggregate, Size No. 53
- ⑥ Pipe, Type 4, Circular, 100 mm

**\* Mainline Superelevated Section**

- ① 90 kg/m<sup>2</sup> HMA Surface 9.5 mm
- ② 120 kg/m<sup>2</sup> HMA Intermediate 12.5 mm
- ③ Variable (110 kg/m<sup>2</sup> Min.) HMA Intermediate OG19.0 mm to attain proper superelevation
- ⑦ Do not mill Existing PCCP if superelevated

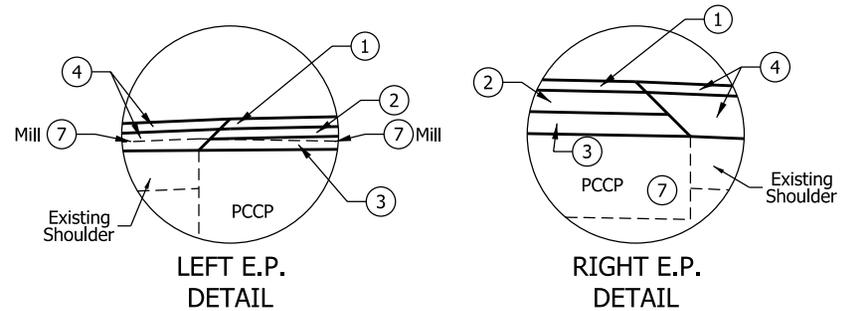

\* Open graded mixture OG19.0 mm should be QC/QA-HMA, 5, 76. For all other mixtures, see Section 52-9.02 to determine the appropriate HMA mixture designation.

## OVERLAY, TILT TO CROWN SECTION, WITH DRAINAGE LAYER

Figure 52-13 I