


*** All Pavement, Including All Shoulders**

- ① 165 lb/yd² HMA Surface 9.5 mm
- ② 275 lb/yd² HMA Intermediate 19.0 mm
- ③ 440 lb/yd² Minimum HMA Base 25.0 mm
- ** ④ 440 lb/yd² QC/QA-HMA Intermediate OG25.0 mm
- ⑤ 440 lb/yd² HMA Base 25.0 mm
- ⑥ Subgrade Treatment
- ⑦ Variable-Depth Compacted Aggregate, No. 53
- ⑧ Pipe, Type 4, Circular, 6 in.

* Open graded mixtures OG19.0 mm or OG25.0 mm should be QC/QA-HMA, 5, 76. For all other mixtures, see Section 52-9.02 to determine the appropriate HMA mixture designation.

** If underdrain warrants are not met, Intermediate OG25.0 mm mix should be replaced with HMA Base 25.0 mm, minimum 495 lb/yd².

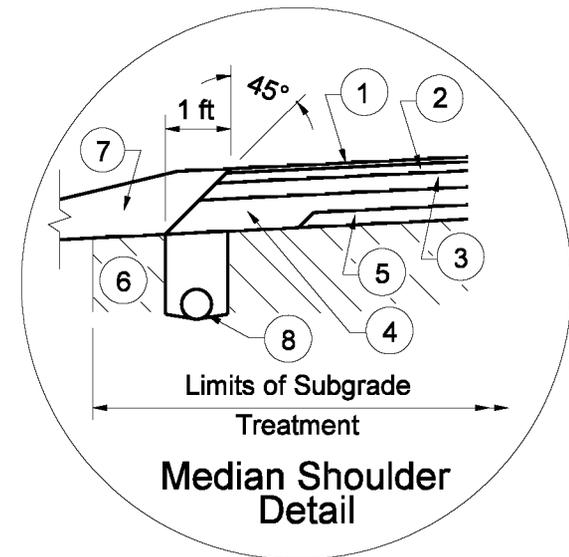

**FULL DEPTH HMA PAVEMENT,
 ≥ 30 MILLION ESALs
 Figure 52-13A**