




4R DESIRABLE OR 3R DESIRABLE OR AADT > 100,000

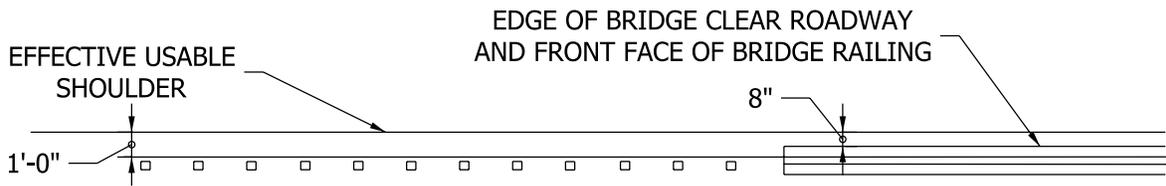

4R NEW CONSTRUCTION MINIMUM OR 3R RESTRICTIVE CONDITION

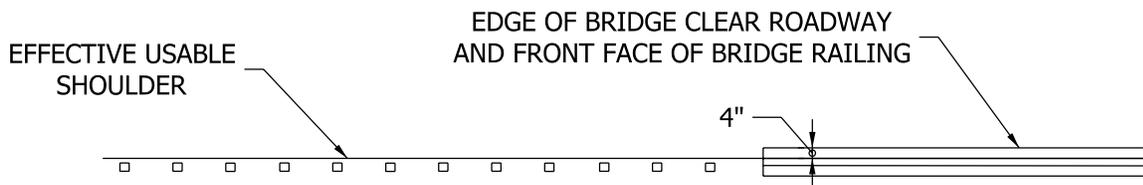


4R RECONSTRUCTION MINIMUM

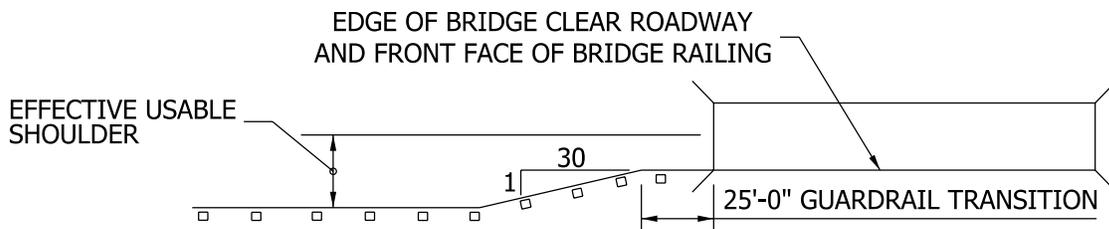




BRIDGE NARROWER THAN EFFECTIVE USABLE SHOULDER

## BRIDGE-RAILING OFFSET (Guardrail Transition to Bridge Railing Shape F or Type TF-2)

Figure 59-1G  
(Page 1 of 2)

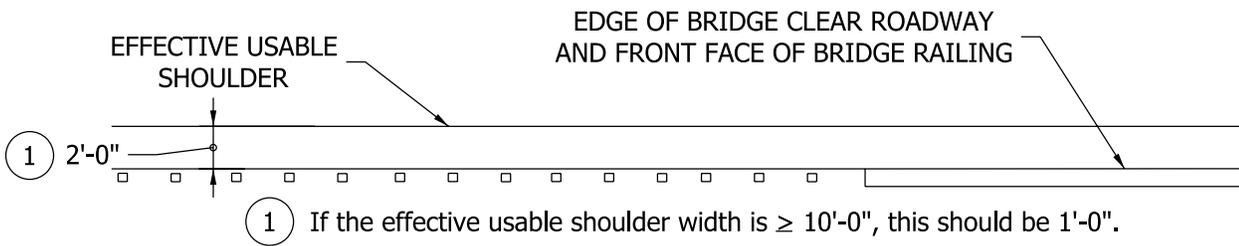

4R DESIRABLE OR 3R DESIRABLE OR AADT > 100,000

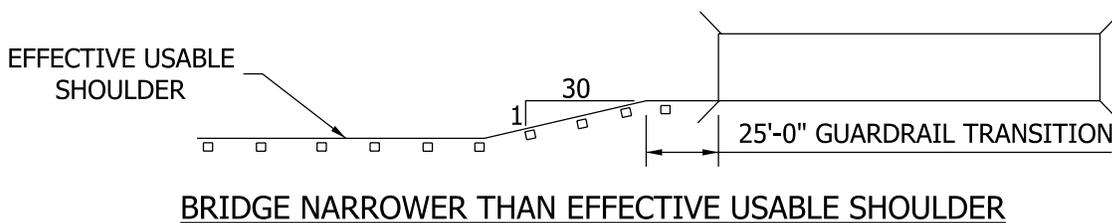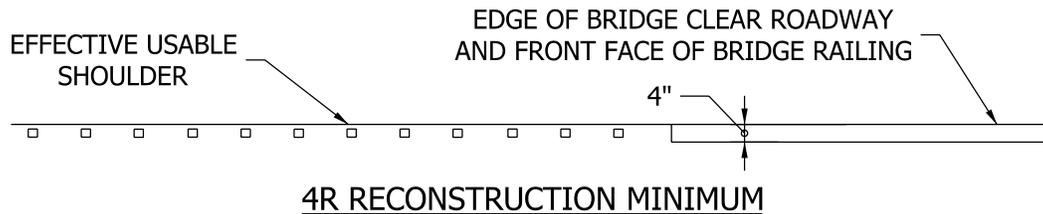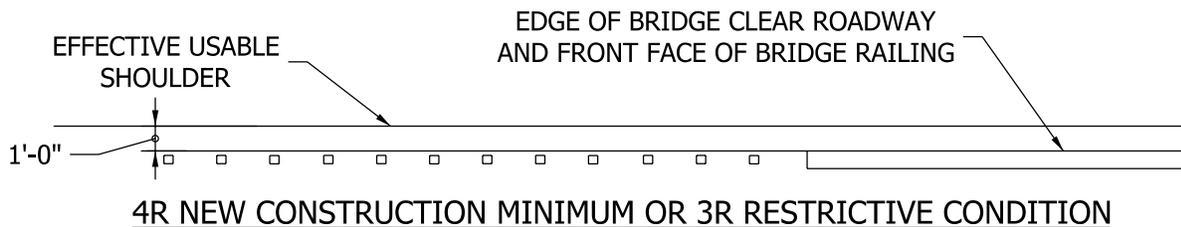

**BRIDGE-RAILING OFFSET**  
 (Guardrail Transition to Bridge Railing  
 Type CF-1, PF-1, PF-2, PS-1, PS-2, or TX)

Figure 59-1G  
 (Page 2 of 2)