


PLAN

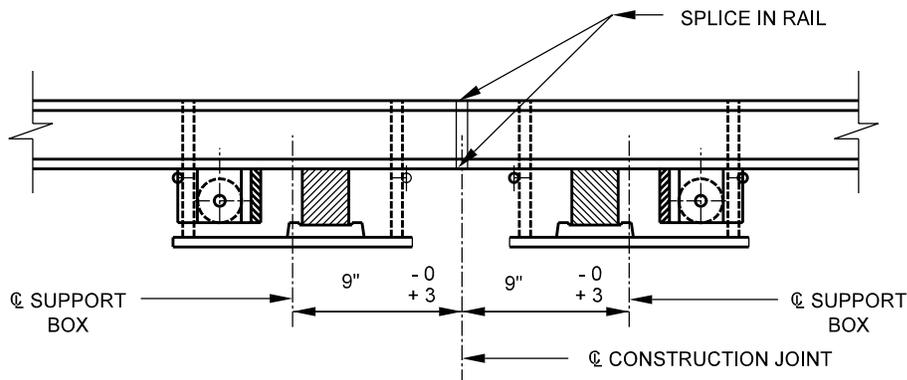

SECTION A-A

Where modular joints are placed in the roadway, the following will apply:

1. The ⊕ of the support box will not be less than 9" nor more than 1'-0" from the construction joint.
2. The elastomeric seal will be one piece across the roadway width and will not be spliced at the construction joint.
3. Where practical, a modular joint should be a one-piece rail across the roadway width.

MODULAR EXPANSION JOINT (Field Splice)

Figure 61-4 I