




PLAN VIEW

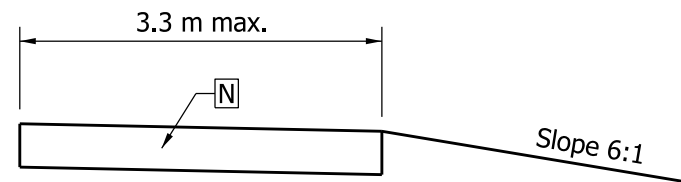

SECTION E-E

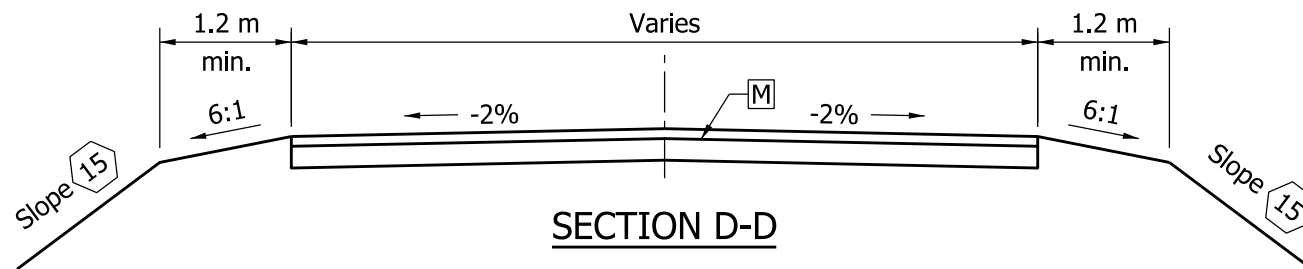

SECTION D-D

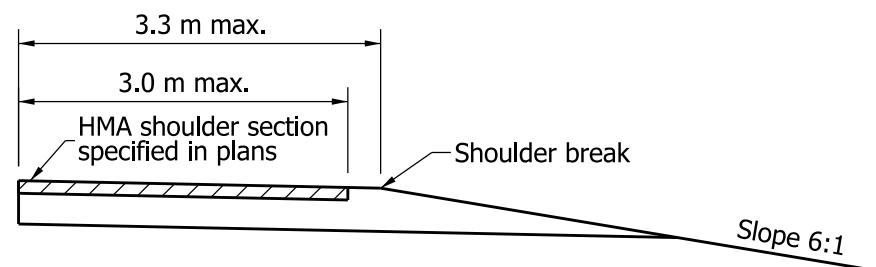

SECTION F-F


NOTES:

1. See Standard Drawing 610-DRIV-13 for General Notes and additional Legend.
2. See Standard Drawings 610-DRIV-11 for drive profile grades.
3. Class VI Drive accommodates a WB-65 (IDV) design vehicle with a 13.7 m turning radius.

LEGEND

- [M] HMA for Approaches:
90 kg/m² HMA Surface Type B on
150 kg/m² HMA Intermediate Type B on
480 kg/m² HMA base, Type B on
subgrade treatment Type IIIA
or
PCCP for Approaches, 225 mm, on
subgrade treatment Type IIIA
- [N] The greater thickness of either the drive [M]
or the paved shoulder section.
- [S] For type and thickness equivalent
to surface in place, see plans.

All Dimensions are in mm unless otherwise specified.

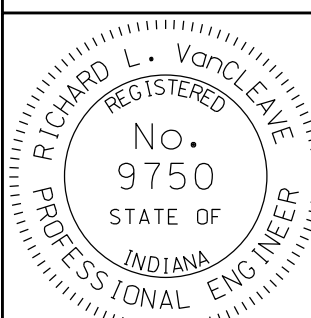INDIANA DEPARTMENT OF TRANSPORTATION	
CLASS VI DRIVE PLAN AND SECTIONS	
SEPTEMBER 2010	
STANDARD DRAWING NO. 610-DRIV-06	
	/s/ <i>Richard L. VanCleave</i> 09/01/10 DESIGN STANDARDS ENGINEER DATE
DESIGN STANDARDS ENGINEER	/s/ <i>Mark A. Miller</i> 09/01/10 CHIEF HIGHWAY ENGINEER DATE