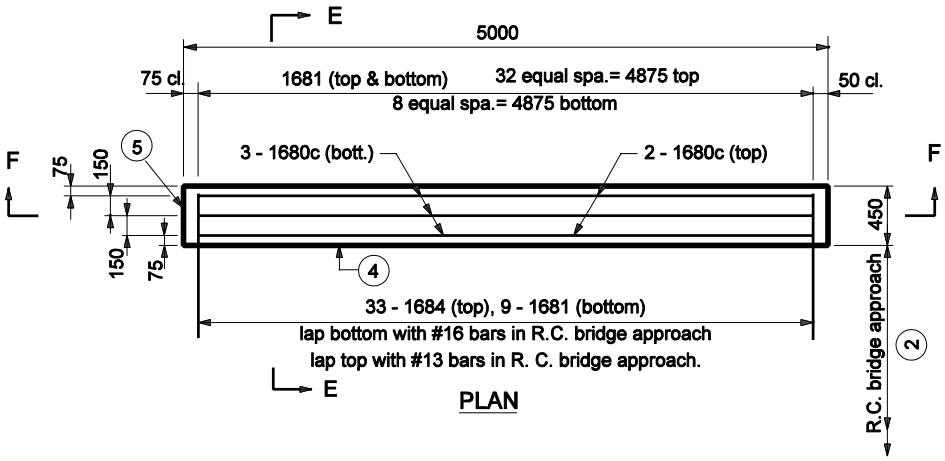

PLAN

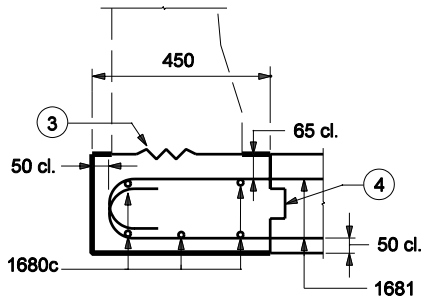

SECTION E-E

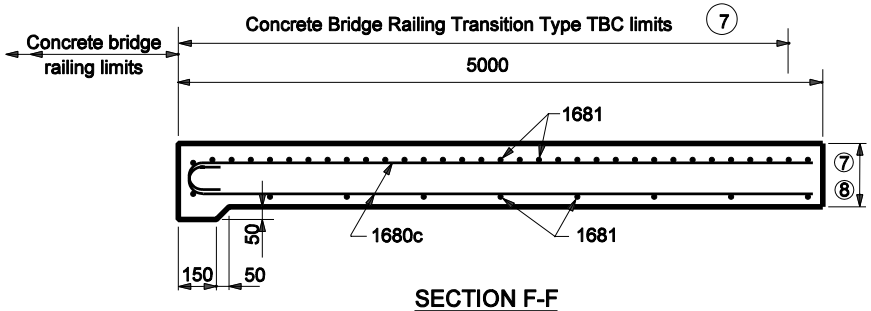

SECTION F-F



1681 x 1280



1680c x 5020

BILL OF MATERIALS			
These quantities are for one side Approach Slab Extension.			
EPOXY COATED REINFORCING STEEL			
Size & Mark	No. of Bars	Length	Weight (kg.)
1680c	5	5020	
1681	42	1280	
Total #16 bars			122
Total Epoxy Coated Steel			122
MISCELLANEOUS			
R.C. Br. Appr., 250			2.3 m 2

NOTES :

1. See Standard Drawings 706-TTBC-01 through -03 for concrete bridge railing transition type TBC details.

2. See Standard Drawing 706-TASE-05 for General Notes.

All dimensions are in mm unless otherwise specfied

INDIANA DEPARTMENT OF TRANSPORTATION

BRIDGE RAILING TRANSITION
TBC SLAB EXTENSION

SEPTEMBER 2004

STANDARD DRAWING NO. 706-TASE-01

RICHARD L. VanCLEAVE REGISTERED No. 9750 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 9-01-04
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 9-01-04
CHIEF HIGHWAY ENGINEER DATE