

Addenda #1 to

PROJECT NO. ENG2003722634

Brown County State Park

Repair of Historic Stone Walls

September 14, 2020

TO: ALL BIDDERS

Notice is hereby given that the following changes shall be considered by the Contractor in their bid for the above referenced project

Notice to Bidders

The Notice To Bidders with regards to pre-qualified classifications and construction period is hereby amended as follows:

Bids shall be taken from Prime Contractors pre-qualified by the Public Works Certification Board in the following classification/s: 1542.01 Institutional Buildings (Hospitals, Schools, Prisons); 1622.01 General Contractors engaged in construction of bridges, viaducts, elevated highways, tunnels, and Earth Retention Structures; 1741.04 Stone Work; or 1799.08 Interior and/ or Architectural Exterior Restoration.

The Specified construction period is 220 calendar days. The State of Indiana reserves the right to reject any and all bids.

All other portions of the Notice to Bidders remain unchanged by this Addendum 1.

General

The minutes and attendance list from the pre bid are attached.



Drawing Sheet 3

Amended as attached Sheet 3 is revised to provide further clarification to the areas of excavation and include resurfacing

Specification Section 02070 GeoGrid

2.01 A Add Hueskers Fortrac 80T is an acceptable product for this application.

Specification Section 02936 Seeding

2.01 A The PERMANENT SEED MIXTURE listed will be used at the lower shelter stairs

2.01 C Delete the table regarding SLIDE CORRECTION SEED MIXTURE, it does not apply to this project.

2.01 D Add a section for TURF GRASS. A turf grass mix consisting of rye grass, blue grass; etc. but not containing any fescues shall be used in areas of the upper shelter that will be mowed.



DNR Brown County State Park Repair of Historic Stone Walls ENG2003722634

September 9, 2020 at 10:30am

Pre Bid Meeting On-Site

Attendance

List Attached

Upper Shelter Wall

- Proposed HMA shall include limits as shown on plans (Paving of existing ADA parking area to be added to proposed HMA area per addendum with revised sheet)
- Existing ADA parking area shall remain open to public for parking during the construction as noted in the plans. New paving shall be phased accordingly to ensure entire parking is paved at one time.
- Stone finish (complications considered in recreating existing stone finish)
 - New stones shall match existing applied finish as close as practical
 - Proposed stone finish shall be verified by engineer/owner for approval
- Existing stone walk slabs
 - Imperfections expected (Reusable stones to be verified by engineer/owner for approval)
 - Concrete will be used in the ADA area per site plans to meet ADA requirements
- Amend Pre-Qualification
- Pre-Qualifications will be examined to see if additional categories can be included
- Tree schedule for Clearing
 - Noted in plans
- All stone considered not usable for the construction of this project shall be returned to the park
 - Contractor shall coordinate with the park for designated area

Lower Shelter/Stairway

- Stone Finish
 - Finish is the same as stones at upper shelter wall
- IDEM permitting for Creek Crossing
 - FPBH to verify any permitting for creek crossing and include in Addenda
- Contractors are responsible for any erosion control and shall maintain site
- Existing sanitary on site, contractor responsible for protection of existing line
- Existing Overhead Telephone
 - Located on plan sheet, (To be maintained throughout construction)



- Tree schedule for Clearing
 - Noted in plans
- All cut trees from both sites to be delivered to park
 - Brush to be hauled or chipped on site
 - Designated area for cut trees to be determined by park
 - 10 feet length for hauling is considered acceptable by park
 - Contractor shall coordinate with park for the amount of logs accepted
- Reseeding mix for disturbed area
 - The mix may be amended
- Existing trail parallel to creek into project location shall remain open to public during the length of the project
 - Temporary staging may occur following coordination with the park
 - Any disturbance to the trail must be repaired following construction to its original condition
- Contractors shall not use the existing parking area as a staging area during construction
- All stone considered not usable for the construction of this project shall be returned to the park
 - Contractor shall coordinate with the park for designated area



TITLE	_____
JOB	_____
BY	_____
DATE	_____

DNR Brown County Wall Repair
Sept 9, 2020 10:30 am

Name	Company	email
Greg Whaley	For Solid Masonry, LLC	glwhaley@gmail.com
AJ Chandler	Milestone	aj.chandler@milestonelp.com
Dwight Cline	Milestone	dccline@milestonelp.com
Craig Schrinke	Biehle	cschrinke@biehleinc.com
Cassey Owens	Biehle	COwens@biehleinc.com
Tom Smith	Aced + Sons Construction	tomj.smith1@comcast.net
Larry Weidlich	Weidlich Const.	lweidlich@weidlichconst.com
Doug Baird	DNR - Brown Co.	dbaird@dnr.IN.gov
Jim Kojetin	Glenroy Const Co Inc	info@glenroyconstructions.com
Andrew Graves	Graves Construction Services, Inc.	Andrew@gravesinc.net
Adam Cooper	FPBH, Inc	acooper@fpbhonline.com
Brad Bender	FPBH, Inc.	bbender@fpbhonline.com
Matthew Pore	DNR	

Upper Shelter Wall – Tree Removal Table
(Note: All trees as noted located left of wall)

- Station - Left Tree Removal
 10+05 6" Oak
 10+05 12" Oak
 10+20 16" double Oak
 10+35 20" double Oak
 10+75 8" Hickory
 11+05 16" Hickory
 11+50 to 13+50 Remove all brush to 20 feet away from wall
 12+25 12" Shagbark Hickory
 12+50 12" Hickory
 13+00 24" Oak
 13+50 36" Oak
 14+25 30" Oak

LEGEND



1. Remove all existing stone, construct new aggregate base and drainage items, reinstall existing whole stone, along with a mix of new stone, and portions of existing stone that can be salvaged.
2. Stone, Sidewalk - Remove and reset existing 4' stone walk with existing stone, Reconstructed stone walk to have 6" curb. (See Detail Sheet 20)
3. ADA Sidewalk - 5.0' ADA compliant sidewalk to be constructed at grade (See Detail Sheet 20)
4. Storm Sewer - Construct storm sewer as shown on plans, (See Detail Sheet 21)
5. Maintenance of Traffic - (2) Barricade Type 3B , Barrels to be set 8ft apart along roadway. Road construction ahead signs to be placed 500ft from site in either direction. Upper Shelter Parking Closed signs to be placed as shown on sheet 2.

LEGEND

- S = Sawcut existing pavement at 15' out from face of existing walk. (See Detail Sheet 7)
- P = Parking Section (See Detail Sheet 7)
- W = Wheel Stop (Only at ADA Parking, See Detail Sheet 7)
- L = Painted Yellow Line
- O = Typical Outfall (See Detail Sheet 8)
- C = 6" Curb (See Detail Sheet 7)

GENERAL NOTE:
 All construction to meet or exceed all state, local, and federal codes & requirements, including but not limited to current INDOT, ISBH, IDEM, OSHA, local requirements & codes. The drawings & specs, that make up the work of this project are interrelated & dependent on every other drawing and spec. section. The contractor shall review all other specs., drawing & addendum (if applicable) to coordinate all work that relates to this project. If an item is drawn or specified on any spec. section or drawing, it shall be as if it were part of this work and shall be provided for in the contract.

NOTES:
 1. This sheet is to be: ANSI D 22" X 34"

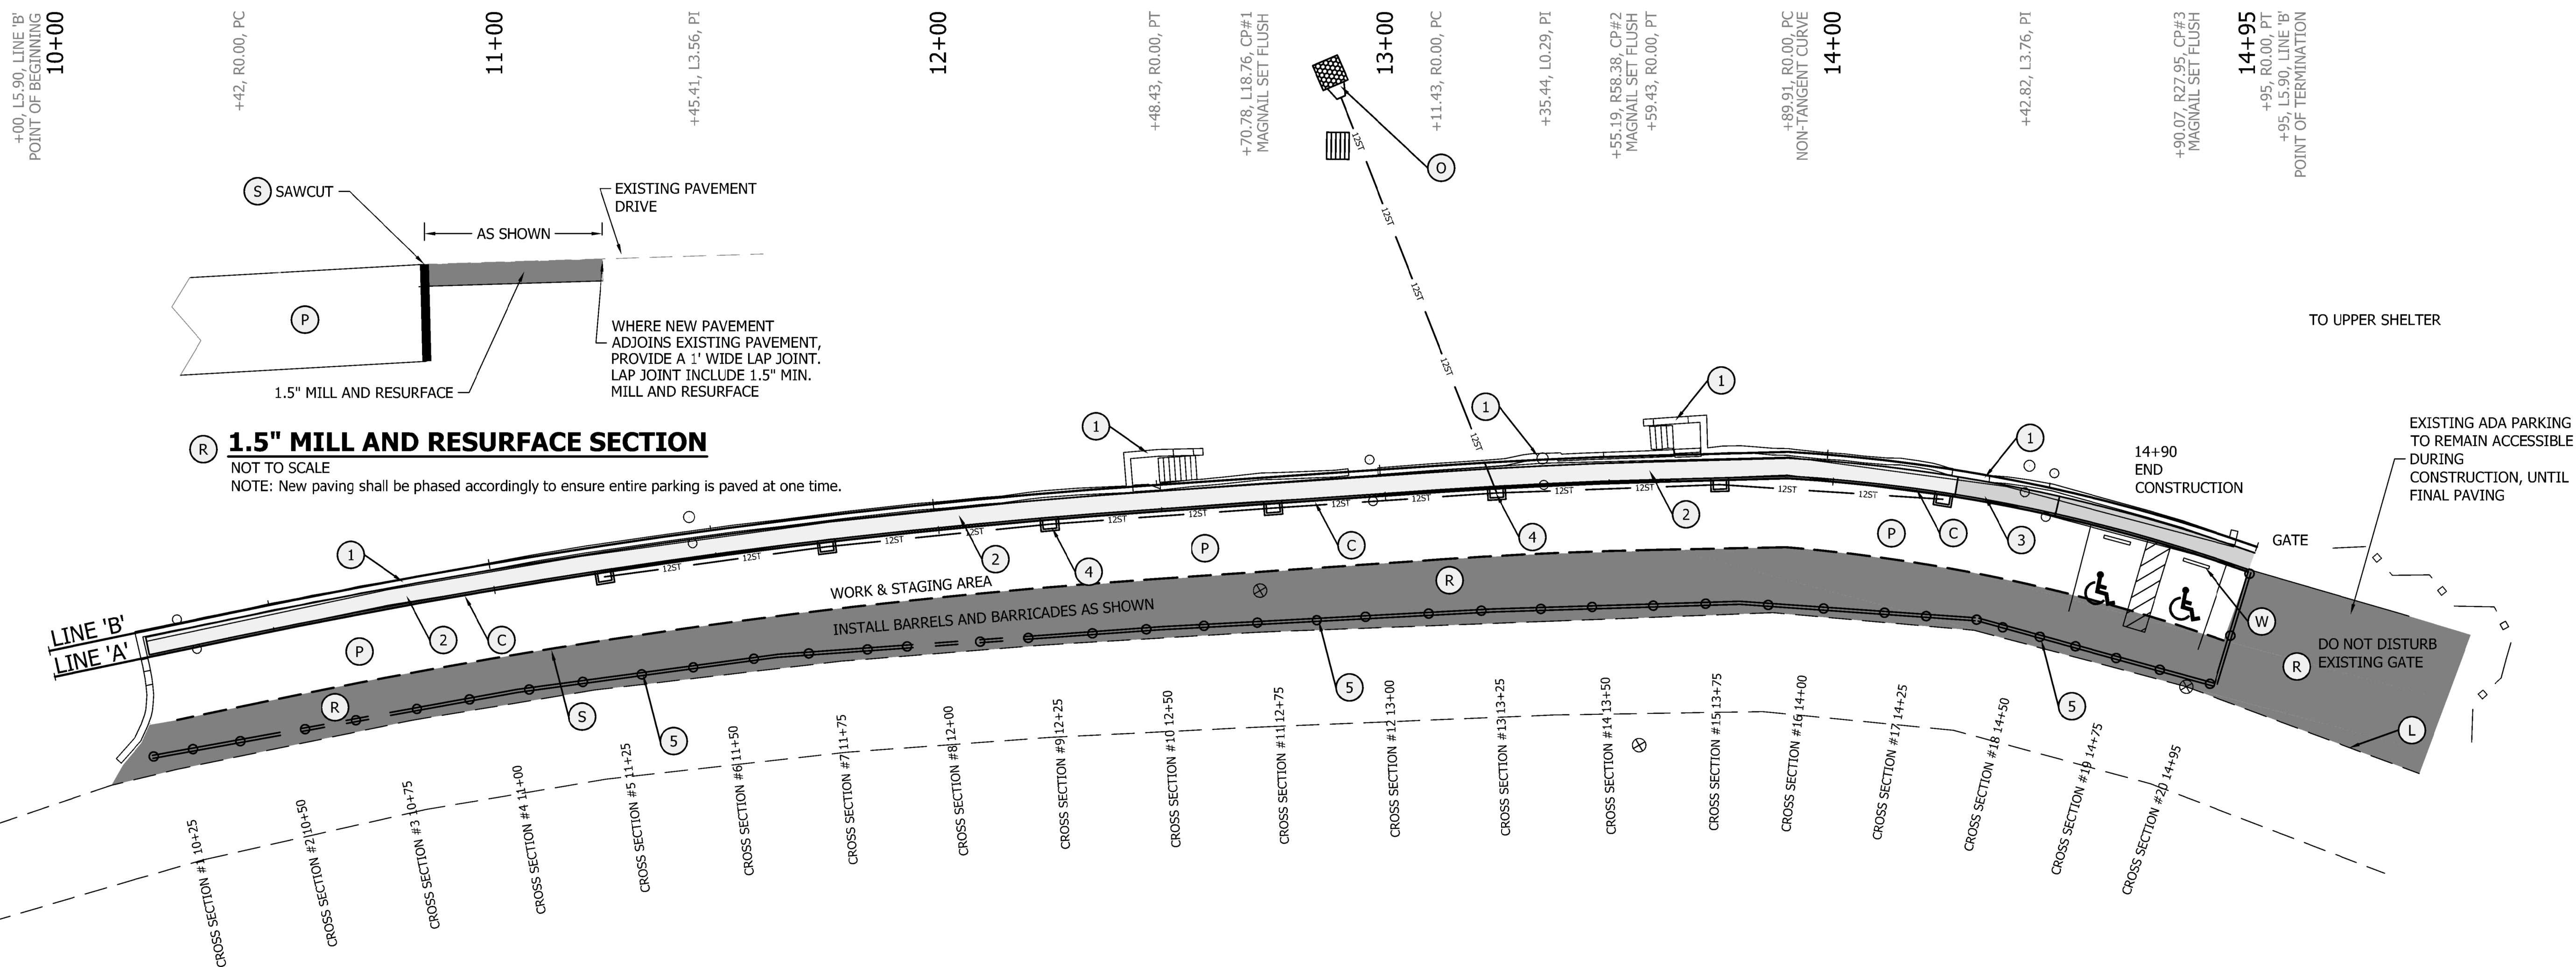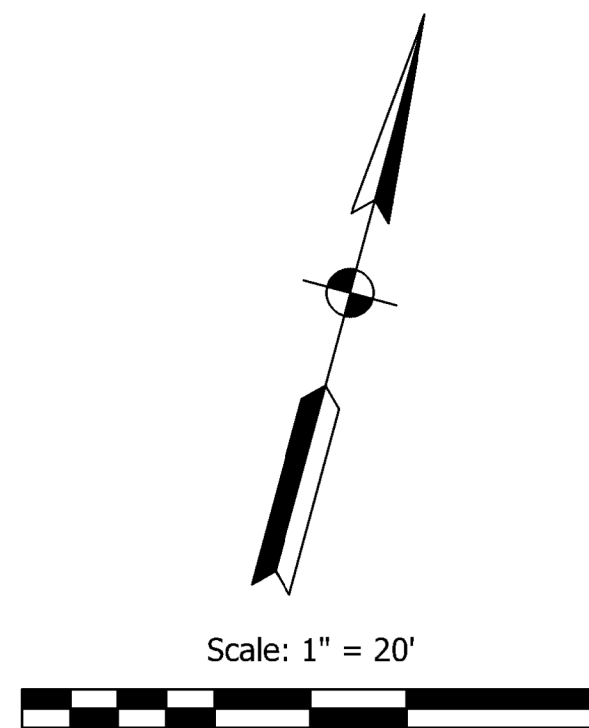

1.5" MILL AND RESURFACE SECTION
 NOT TO SCALE
 NOTE: New paving shall be phased accordingly to ensure entire parking is paved at one time.

GENERAL PLAN LINE 'A' & MAINTENANCE OF TRAFFIC

**Addenda #1
 Sheet Revision**

FPBH, Inc.
 Engineers • Surveyors • Planners • Inspectors
 Offices in North Vernon, Seymour, & New Castle
 72 Henry Street, PO Box 47
 North Vernon, IN 47265
 P: (812) 346-2045 Toll Free: 1-866-ENG-FPBH
 www.fpbhonline.com



SCALE: 1" = 20'		
DRAWN BY: ARC		
CHECKED BY: BAH		
DATE: AUGUST 28, 2020		
Revision	Drawn By	Date
1	ARC	2020-09-10
FILE NO: 19-11229		
CLIENT NAME: DNR		
PROJECT DESCRIPTION: DNR WALL AND TRAIL		
SHEET TITLE: WALL GENERAL PLAN - MOT		
DESIGN PHASE: BIDDING PLANS		
SHEET NUMBER: 3		