

**SEPTEMBER 29, 2025  
ADDENDUM NUMBER ONE  
Project No. ENG2603744009  
For Department of Natural Resources**

TO: ALL BIDDERS

**The information contained in this Addendum shall become a part of the basic plans and specifications the same as if original incorporated therein. The original plans and specifications shall remain in their entirety, except as modified by this Addendum. The items herein shall supersede information in the specifications and on the plans.**

**GENERAL CLARIFICATIONS**

**ITEM NO. 1 – DISPOSAL OF MATERIALS:** Excess stone from the culvert shall remain at the park and be delivered to the service area. See attached map with location. All other excess material to include but not limited to (trees, excavated material, asphalt, stumps, soil, rock, etc.) shall be hauled off-site by contractor.

**ITEM NO. 2 – ROAD CLOSURES:** Closure of roads for construction shall take place between December 8, 2025 and March 1, 2026. Maximum length of closures shall be 3-weeks. All closures shall be coordinated with the park per Specifications Section 02500. Contractor shall provide a minimum of 7 days' notice prior to scheduled closures with a specified length of closure. All temporary traffic control measures shall be provided by contractor as part of this project; whether for full closure or partial lane closures.

**ITEM NO. 3 – ADDITIONAL CONSTRUCTION PROJECTS IN AREA:** There is an additional construction project at the park for a water main replacement that will be constructed simultaneously as this project. Contractor shall include coordination services for smooth operations between these two projects.

**ITEM NO. 4 – PRODUCT APPROVED EQUAL:** Slip-lining product approved equal (UGS Vylon Slipliner)

**ITEM NO. 5 – PRE-BID MINUTES:** ATTACHED

**There are no Drawing Revisions as part of this Addenda**

**END OF ADDENDUM**

File: 23-13067



# VERSAILLES STATE PARK

Box 205, 1387 E. U.S. 50 • Versailles, IN 47042 • (812) 689-6424  
5,988 Acres Established 1943


**CAUTION:**  
Trail crosses  
Laughery Creek.  
Impassable during  
high water.

MOUNTAIN BIKE TRAILS		
TRAIL NAME	MILEAGE	TRAIL TYPE
1 Grandview Loop	6.0	More Difficult
2 Center Loop	2.0	More Difficult
3 Creekside Loop	1.4	More Difficult
4 Cliffside	2.5	More Difficult
5 Turtle Loop	1.0	Easy
6 Shadow Run Loop	4.0	More Difficult
7 Last Chance	2.0	More Difficult
8 Eagle Trace	1.0	More Difficult
9 Worm Hole	2.5	More Difficult

HIKING TRAILS		
TRAIL NAME	MILEAGE	TRAIL TYPE
① Old Forest	3.0	More Difficult
② Orchard	1.25	Easy
③ Fallen Timber Creek	1.85	Easy
④ Otter Trail	1.5	Easy

LEGEND			
	Boundary		Accessible
	Road		Campground
	Hiking Trail		Playground
	Mnt. Bike Trail		Camp Store
	Mnt. Bike Trailhead		Shelter
	Parking Lot		Nature Center
	Emergency Telephone		Picnic Area
	Restrooms		Dumping Station
	Boat Launch		Saddle Barn
	Swimming Pool		Trailhead
	Boat Rental		Covered Bridge
	Gatehouse		CCC Statue

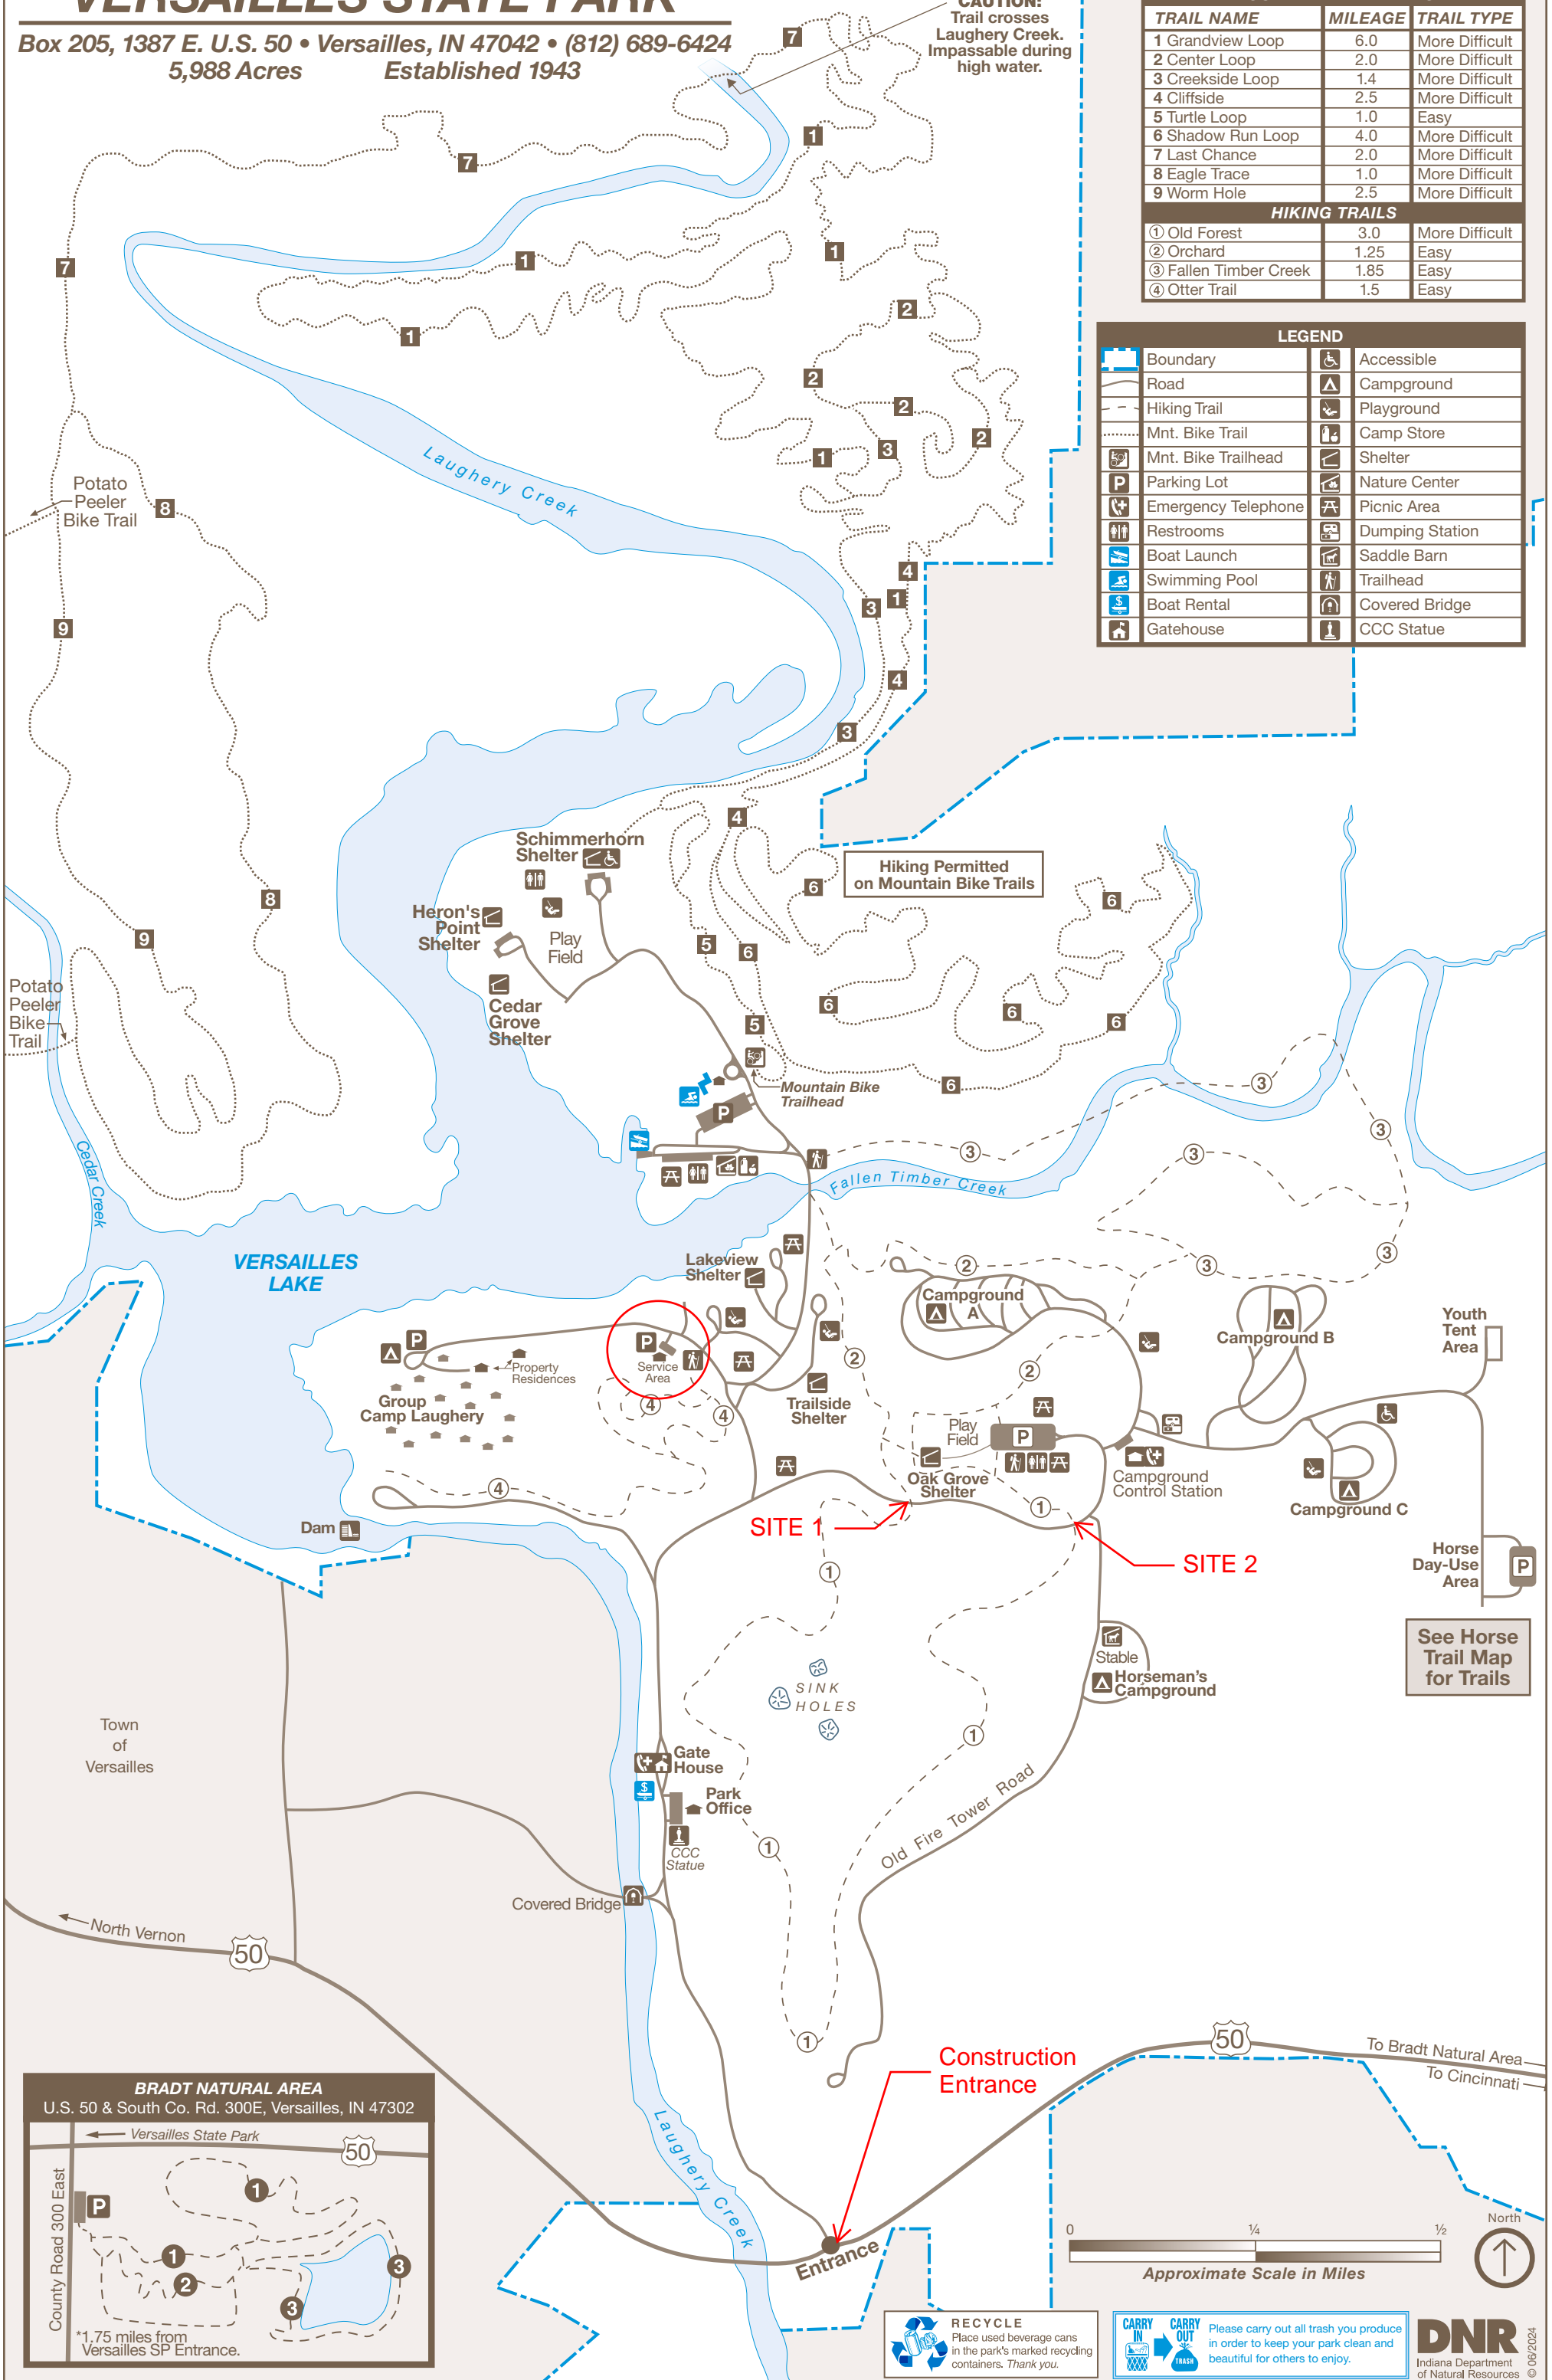

Hiking Permitted  
on Mountain Bike Trails


SITE 1

SITE 2

SITE 1

Construction  
Entrance

Entrance

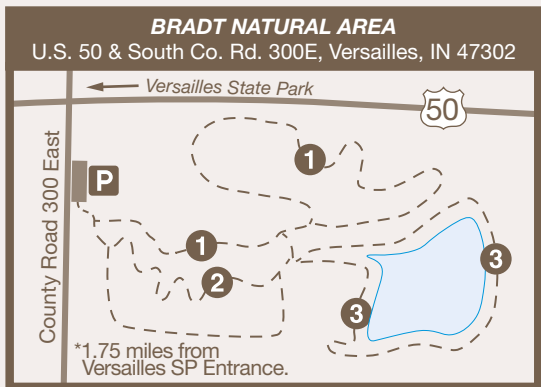

**RECYCLE**  
Place used beverage cans  
in the park's marked recycling  
containers. Thank you.

**CARRY IN CARRY OUT**  
Please carry out all trash you produce  
in order to keep your park clean and  
beautiful for others to enjoy.

**DNR**  
Indiana Department  
of Natural Resources

© 06/2024



72 Henry Street,  
North Vernon, Indiana 47265  
Telephone: 812-346-2045

Pre-Bid Meeting Agenda: Versailles State Park – Drainage Improvements

Publics Works Project No. ENG2603744009

Date: September 22 @ 11:00 AM

Address: Project Site

**Introduction:**

Thierry Liberge, LPG - DNR

Adam Cooper, PLS, EI, - Gonzalez Companies

**Schedule:**

Following as listed in the Notice to Bidders.

Be sure you are familiar with the Qualifications, MBE, WBE, and IVOSB goals as listed in the Notice.

Bids are due by 1:31 pm on October 7, 2025 after which all bids will be publicly opened and read on line in a virtual Teams Live event (see notice to bidders for information).

The specified construction period is ending May 30, 2026. The State of Indiana reserves the right to reject any and all bids.

Plans can be obtained from the Department of Natural Resources Division of Engineering Website. Link is available in the Notice to Bidders.

RFI's – must be sent in writing to the Designer and/or Publics works division

Gonzalez Co. (Designer): adam.cooper@gocos.net

Dead line for submitting RFI's shall be Sunday, September 28, 2025. No questions asked or answered over the phone. RFIs are not considered binding unless included in an Addenda.

We will be taking questions today and noted; these may be included in the addenda. Again, only items reflected in the addenda are binding.

**Project Scope:** Project is broken down into a base bid, alternate #1, and alternate #2 as shown in the plans and specs.

- Base Bid:
  - All items not shown under Alt #1 and Alt #2
  - All barricades and traffic signage
  - Removal of trees and fallen debris in the construction area.
  - Installation of slip-lining per plans and specs.
  - Installation of Gabion baskets per plans & specs.
  - Installation of proposed box culvert per plans and specs.
  - Masonry work using existing stone from 3-sided culvert for stone facing on new culvert and headwalls.



72 Henry Street,  
North Vernon, Indiana 47265  
Telephone: 812-346-2045

- All other installation and items per plans & specs to include but not limited to excavation to grade, geotextile, aggregate, compacting & rolling subgrade, HMA, grading shoulders, stabilizing disturbed areas.
- ABI #1
  - Remove & Replace existing 22ft pedestrian bridge with a pre-engineered 24ft span bridge. Inside width shall be 4ft clear. Proposed foundations by contractor. Design of bridge and foundations shall be sealed by a professional engineer licensed in the state of Indiana.
- ABI #2
  - Remove & Replace existing 11ft pedestrian bridge with a pre-engineered 12ft span bridge. Inside width shall be 4ft clear. Proposed foundations by contractor. Design of bridge and foundations shall be sealed by a professional engineer licensed in the state of Indiana.

**Meeting Notes:**

All contractors will need to be pre-qualified.

A pre-construction meeting will be held prior to the start of construction, the date of which will be determined at a later date.

Coordination between the contractor and park will be required to ensure access to the site during construction. Detailed scheduling shall be discussed during the pre-construction meeting.

Disturbance for this project is less than 1 acre, therefore, not requiring a Construction Stormwater General Permit. However, erosion control items and locations are noted on the plans and shall be required for this project. IDEM 401/404 NWP has been obtained for this project and contractor shall continue to meet those requirements during the course of this project.

Versailles Culverts - Pre-bid Meeting - September 22, 2025

Name	Company	Email	Tel
Thierry Liberge	DNR Engineering	THLIBERGE@DNR.IN.GOV	317-499-4726
→ Todd S. Stearns	DNR Engineering	TSTEARNS@DNR.IN.GOV	317-499-2714
Alex Garcia	DNR / Versailles	agarcia2@dnr.in.gov	812-363-6063
RICHARD VUCKSON	R.L. VUCKSON	RLVX@AOL.COM	812-525-4265
TOM MARTIN	STRIEGEL CONST. DESIGN	MARTINSTRM4@GMAIL.COM	812-350-2172
Nad Day	Lawyer Excavation	Nad.day@lawyerexcavation.com	(812) 528-8323
Adam Cooper	Gonzelce C	adam.cooper@gocos.net	(812) 767-0647
Lexie Striegel	Striegel Design Const.	lexie@striegelco.com	812-525-8099
Leon Pottschmidt	Dave Amara	<del>leon</del> terid@devamara.com	812-346-4135
Garnett McAdams	Versailles S.P.	gmcadams@dnc.in.gov	812-498-9020
Troy Merton	King's Trucking	troy@kingstruckng.net	812-216-6808
John Bauer	R.L. Vuckson	bruce.jd@icloud.com	812-525-7185
Chuck Stanbery	United Rentals	cstanbery@ur.com	513-716-7219