
INDOT - PERMITS DIVISION UTILITY PERMITS (NOT BROADBAND) Two-Lane Highway BORING AND JACKING SPECIFICATIONS WORKSHEET

PLEASE FILL-IN ALL NECESSARY INFORMATION AND DIMENSIONS ON DRAWINGS

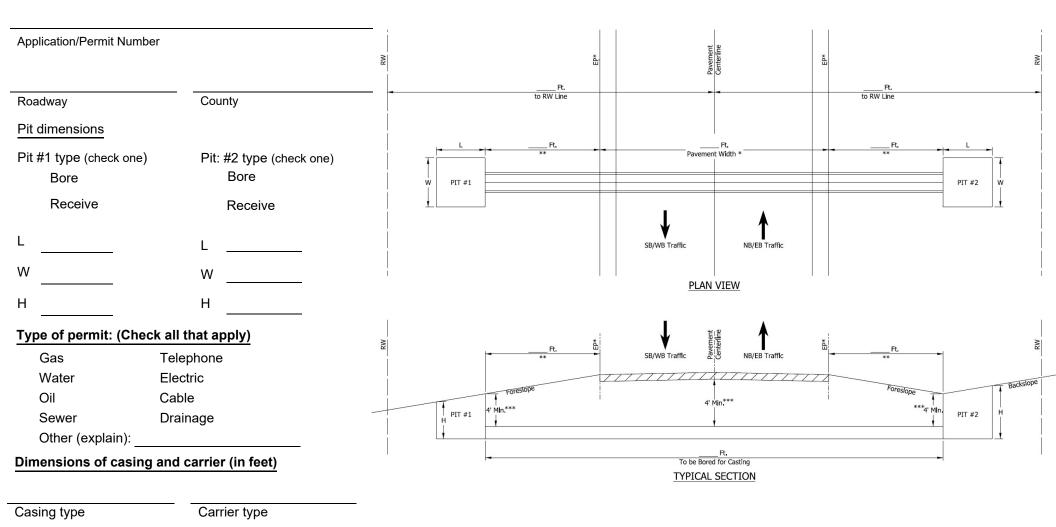

* EP/Pavement Width includes: Auxiliary lanes, Turn Lanes, and Paved Shoulders.

** Minimum distance equals 10 ft. plus the depth of the bore.

***For all types, a minimum 4-feet depth is required under or within 5 feet of pavement/ structure, and under ditches. Installations must conform with all industry standards, see current INDOT Utility Accommodation Policy (Link).

Location: (RRP if available)

Thickness

Length

Diameter

Length

Diameter