


MIAMI

2011 Cropland Tillage Data - Corn

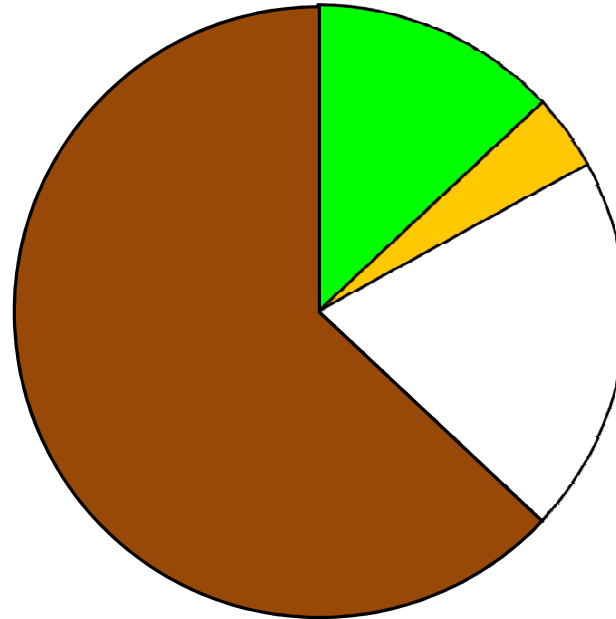

- No-Till * (13%) = 8600 ac
- Mulch Till (4%) = 2600 ac
- Reduced Till (20%) = 13200 ac
- Conventional (63%) = 41600 ac


* **No-Till** - Any direct seeding system, including site preparation, with minimal soil disturbance (includes strip & ridge till)

Mulch Till - Any tillage system leaving 30% - 75% residue cover after planting, excluding no-till

Reduced - Any tillage system leaving 16% - 30% residue cover after planting

Conventional - Any tillage system leaving less than 15% residue cover after planting

2011 Cropland Tillage Data - Soybean

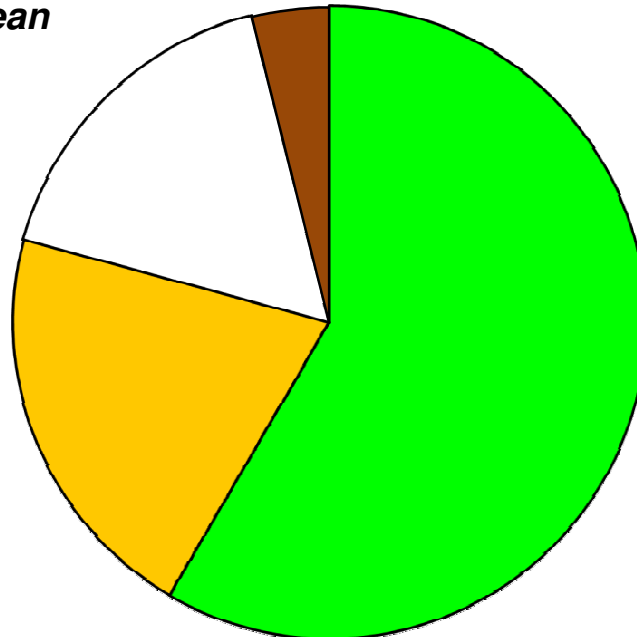

- No-Till * (59%) = 47400 ac
- Mulch Till (21%) = 16900 ac
- Reduced Till (17%) = 13700 ac
- Conventional (4%) = 3200 ac

- Acreage Estimates from NASS 2009 (corn and soybean only)
- Erosion estimates are from USLE based on each point's R, k, LS, and appropriate C factor based on rotation and tillage
- Diesel fuel savings are from NRCS Energy Estimators - Tillage