


JOHNSON

2013 Cropland Tillage Data - Corn

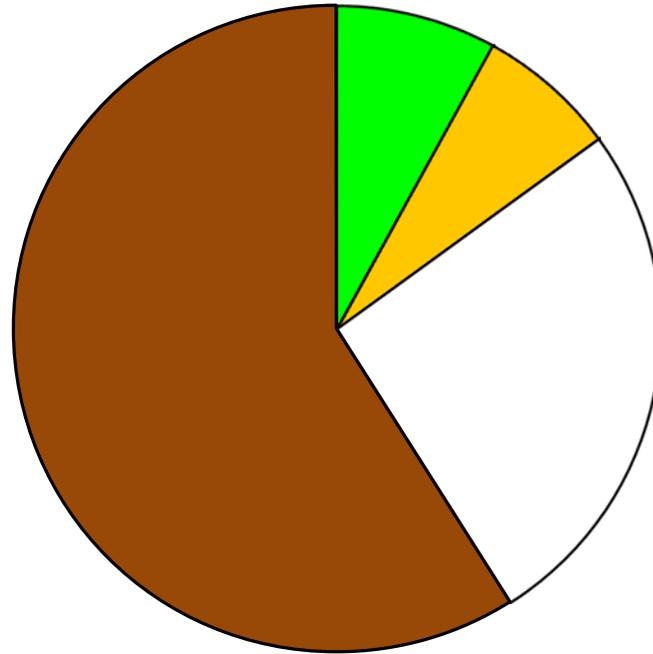

- No-Till * (8%) = 4400 ac
- Mulch Till (7%) = 3900 ac
- Reduced Till (26%) = 14400 ac
- Conventional (59%) = 32700 ac


* **No-Till** - Any direct seeding system, including site preparation, with minimal soil disturbance (includes strip & ridge till)

Mulch Till - Any tillage system leaving 30% - 75% residue cover after planting, excluding no-till

Reduced - Any tillage system leaving 16% - 30% residue cover after planting

Conventional - Any tillage system leaving less than 15% residue cover after planting

2013 Cropland Tillage Data - Soybean

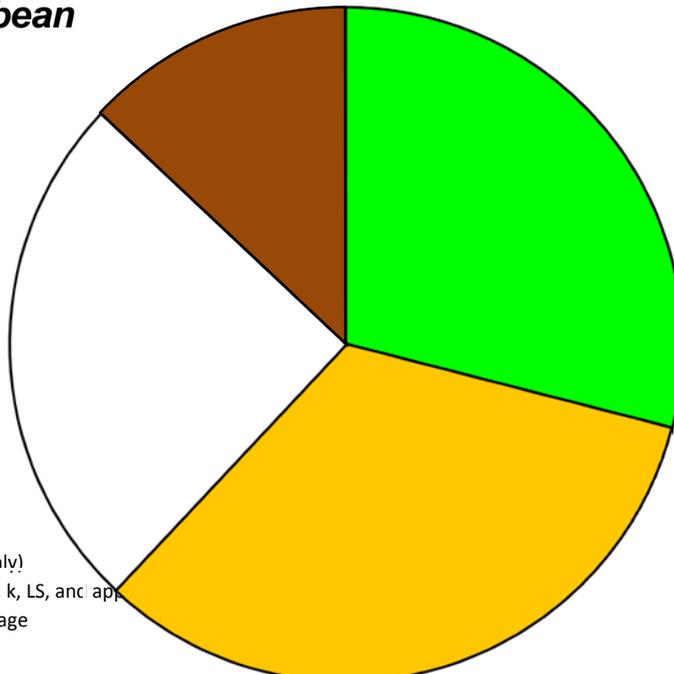

- No-Till * (29%) = 12200 ac
- Mulch Till (33%) = 13900 ac
- Reduced Till (25%) = 10500 ac
- Conventional (13%) = 5500 ac

- Acreage Estimates from NASS 2009 (corn and soybean only)
 - Erosion estimates are from USLE based on each point's R, K, LS, and app
 - Diesel fuel savings are from NRCS Energy Estimators - Tillage



- Acreage Estimates from NASS 2009 (corn and soybean only)
- Erosion estimates are from USLE based on each point's R, k, LS, and appropriate C factor based on rotation and tillage
- Diesel fuel savings are from NRCS Energy Estimators - Tillage