



Indiana Department of Environmental Management
Office of Water Quality
Waterways Section

Publication Date:
July 30, 2026

IDEM Permit Number:
WQC001492

PUBLIC NOTICE

Closing Date:
August 20, 2026

Corps of Engineers ID Number:
N/A


To all interested parties:

This letter shall serve as a formal notice of the receipt of an application for Section 401 Water Quality Certification by the Indiana Department of Environmental Management (IDEM). The purpose of the notice is to inform the public of active applications submitted for water quality certification under Section 401 of the Clean Water Act (33 U.S.C. § 1341) and to solicit comments and information on any impacts to water quality related to the proposed project. IDEM will evaluate whether the project complies with Indiana's water quality standards as set forth at 327 IAC 2.

- | | | | |
|--------------------------------|---|------------------|--|
| 1. Applicant: | Steve Moore
Town of Avon
6570 East Us Highway 36
Avon, IN, 46123 | 2. Agent: | Leigh VanHyfte
American Structurepoint, Inc.
9025 River Road, Suite 200
Indianapolis, IN, 46240 |
| 3. Project Location: | 1924 Dan Jones Road, Avon, IN, 46123
Latitude: 39.734235
Longitude: -86.381197 | | |
| 4. Affected Waterbody: | UNT to Clarks Creek | | |
| 5. Project Description: | Approximately 212 linear feet of an unnamed tributary (UNT) to Clarks Creek will be permanently impacted due to stream relocation, encapsulation, and scour protection. The project proposes to relocate UNT to Clarks Creek from an existing reinforced concrete pipe (RCP) into a series of three smaller diameter RCPs.
For additional information visit the Regulatory ePortal at: https://waterquality.idem.in.gov | | |

- Comment Period:** Any person or entity who wishes to submit comments or information relevant to the aforementioned project may do so by the closing date noted above. Only comments or information related to water quality or potential impacts of the project on water quality can be considered by IDEM in the water quality certification review process.
- Public Hearing:** Any person may submit a written request that a public hearing be held to consider issues related to water quality in connection with the project detailed in this notice. The request for a hearing should be submitted within the comment period to be considered timely. The request should also state the reason for the public hearing as specifically as possible to assist IDEM in determining whether a public hearing is warranted.
- Questions?** Submit requests for additional information and written comments to WaterwaysComments@idem.IN.gov. In the subject line of the email, please include the IDEM ID Number listed in the top right corner of the first page of this public notice. Indicate if you wish to receive a copy of IDEM's final decision. Comments and inquiries may also be forwarded to -

Office of Water Quality
Indiana Department of Environmental Management
100 North Senate Avenue, IGCN 1255
Indianapolis, Indiana 46204-2251

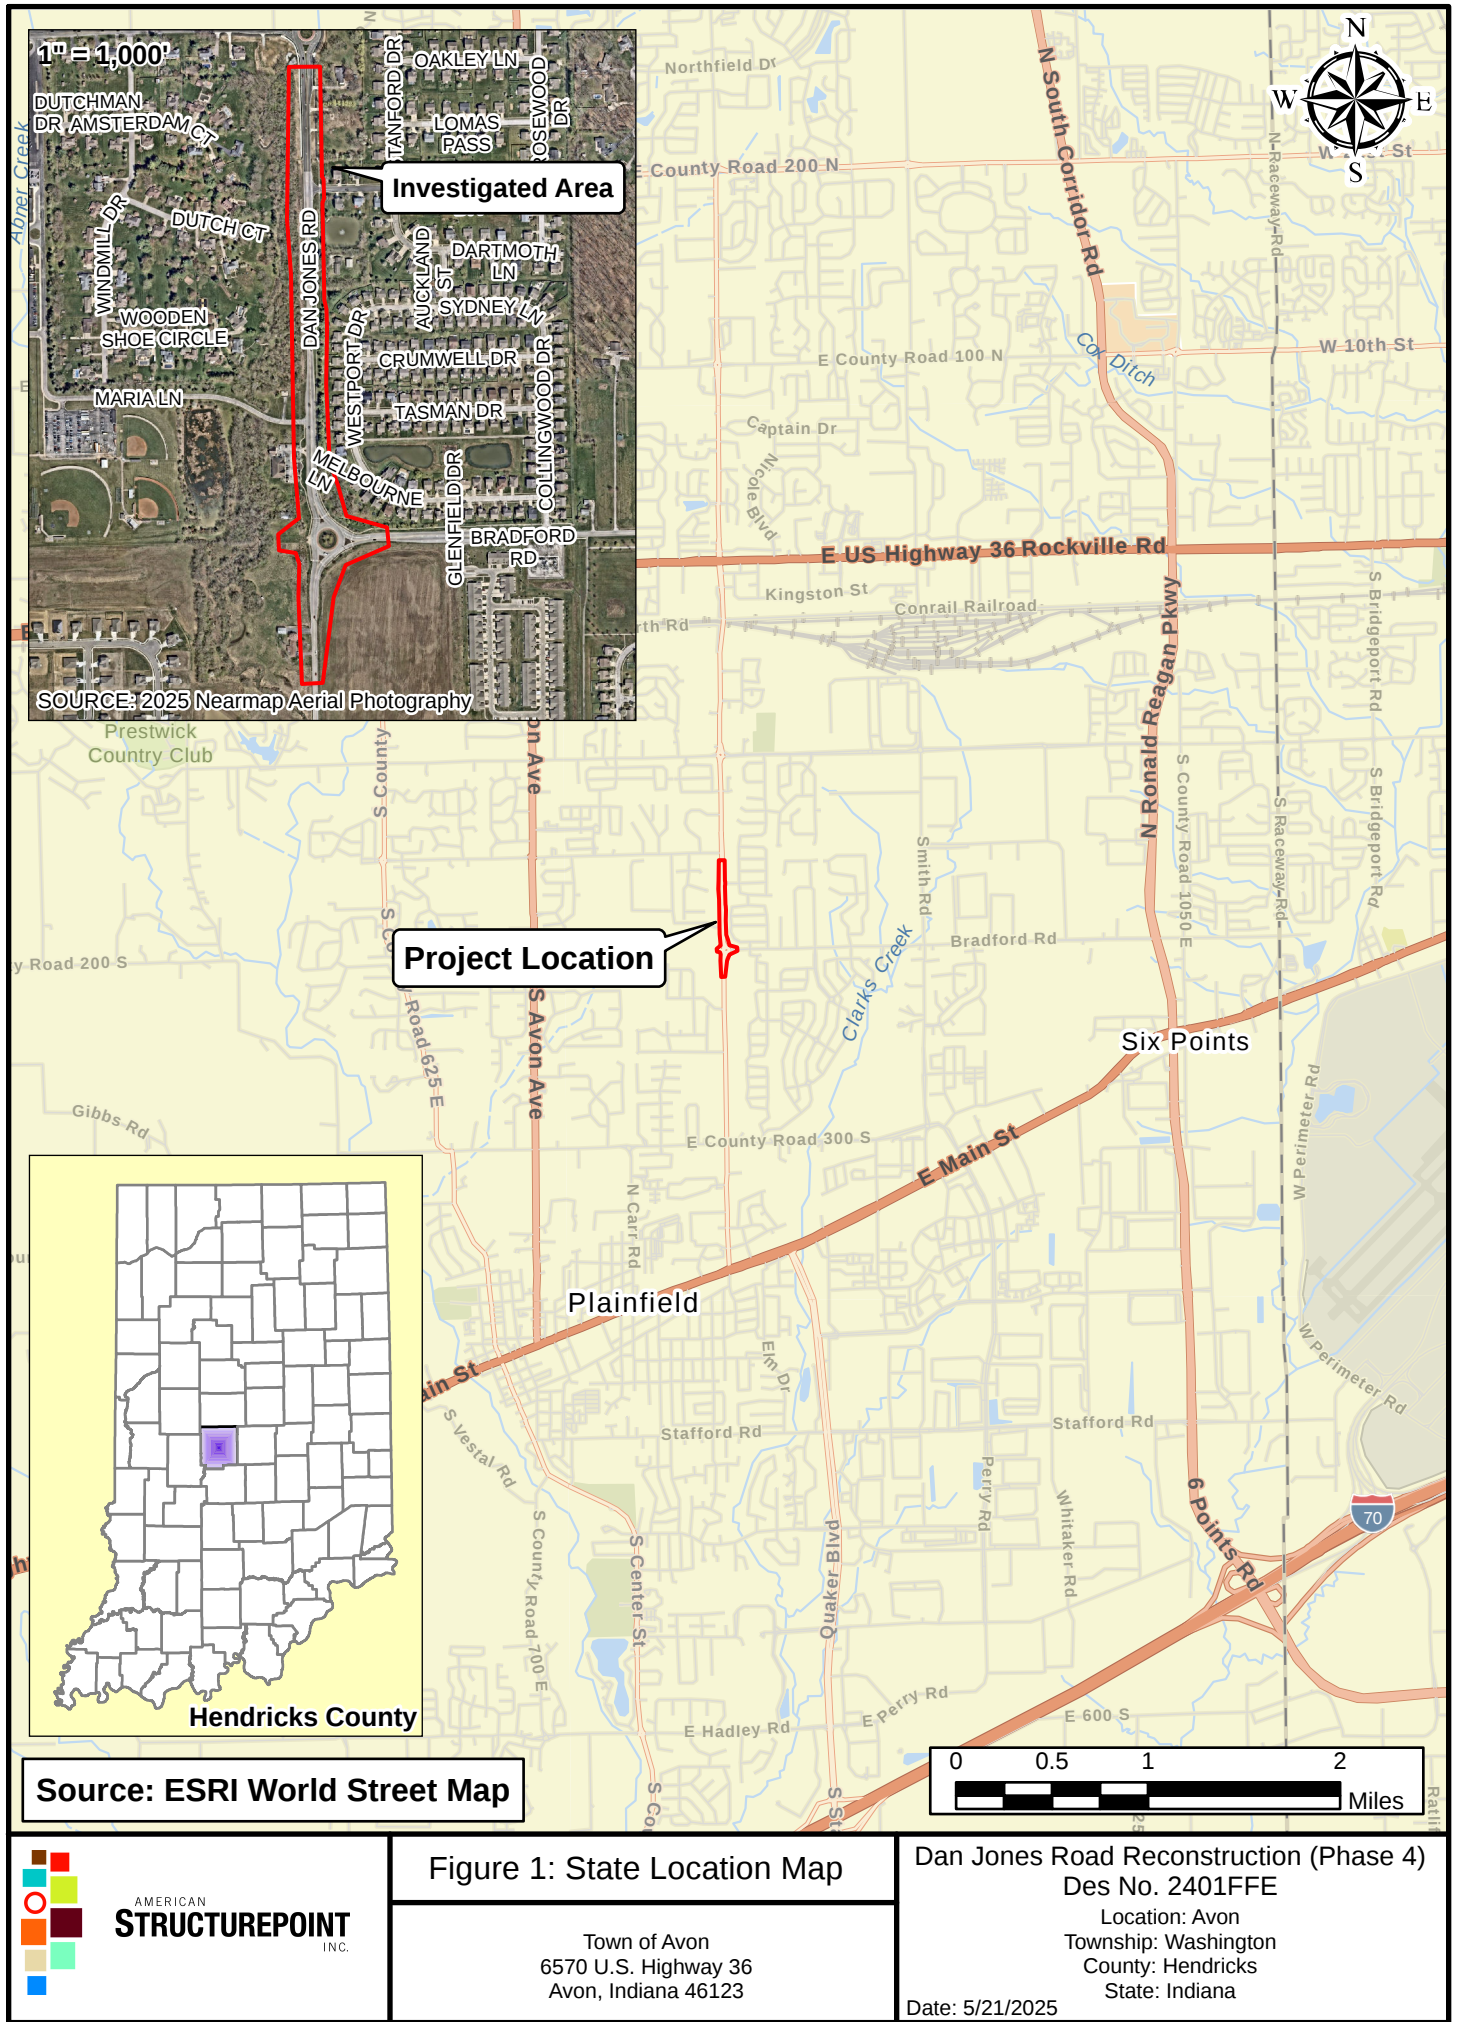

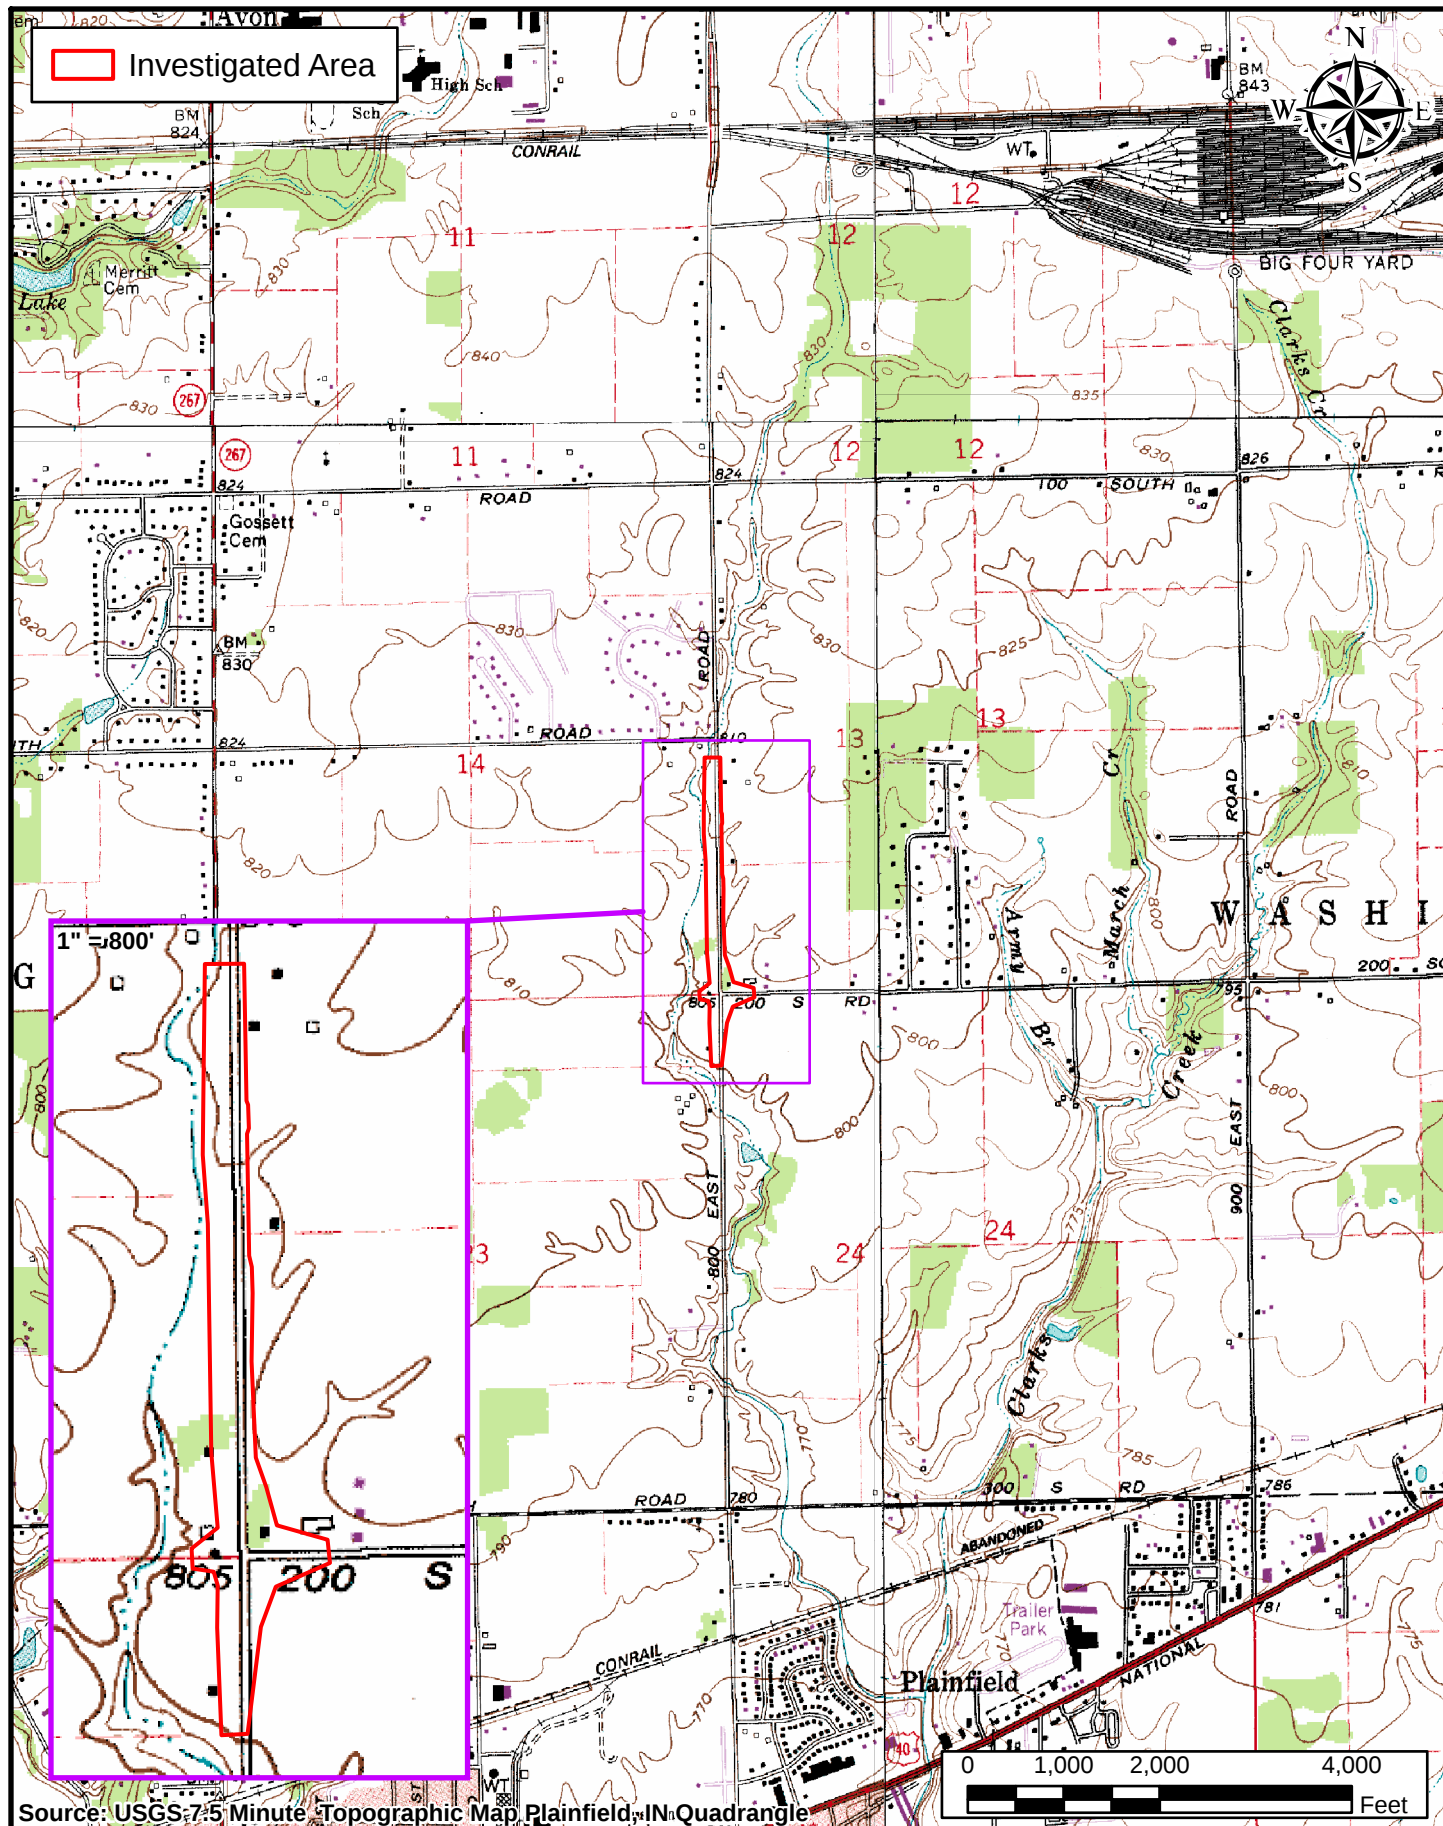


Figure 2: USGS Topographic Map

Town of Avon
6570 U.S. Highway 36
Avon, Indiana 46123

Dan Jones Road Reconstruction (Phase 4)
Des No. 2401FFE

Location: Avon
Township: Washington
County: Hendricks
State: Indiana

Date: 5/21/2025



Figure 9: Water Resources Map

Town of Avon
6570 U.S. Highway 36
Avon, Indiana 46123

Dan Jones Road Reconstruction (Phase 4)
Des No. 2401FFE

Location: Avon
Township: Washington
County: Hendricks
State: Indiana

Date: 6/27/2025

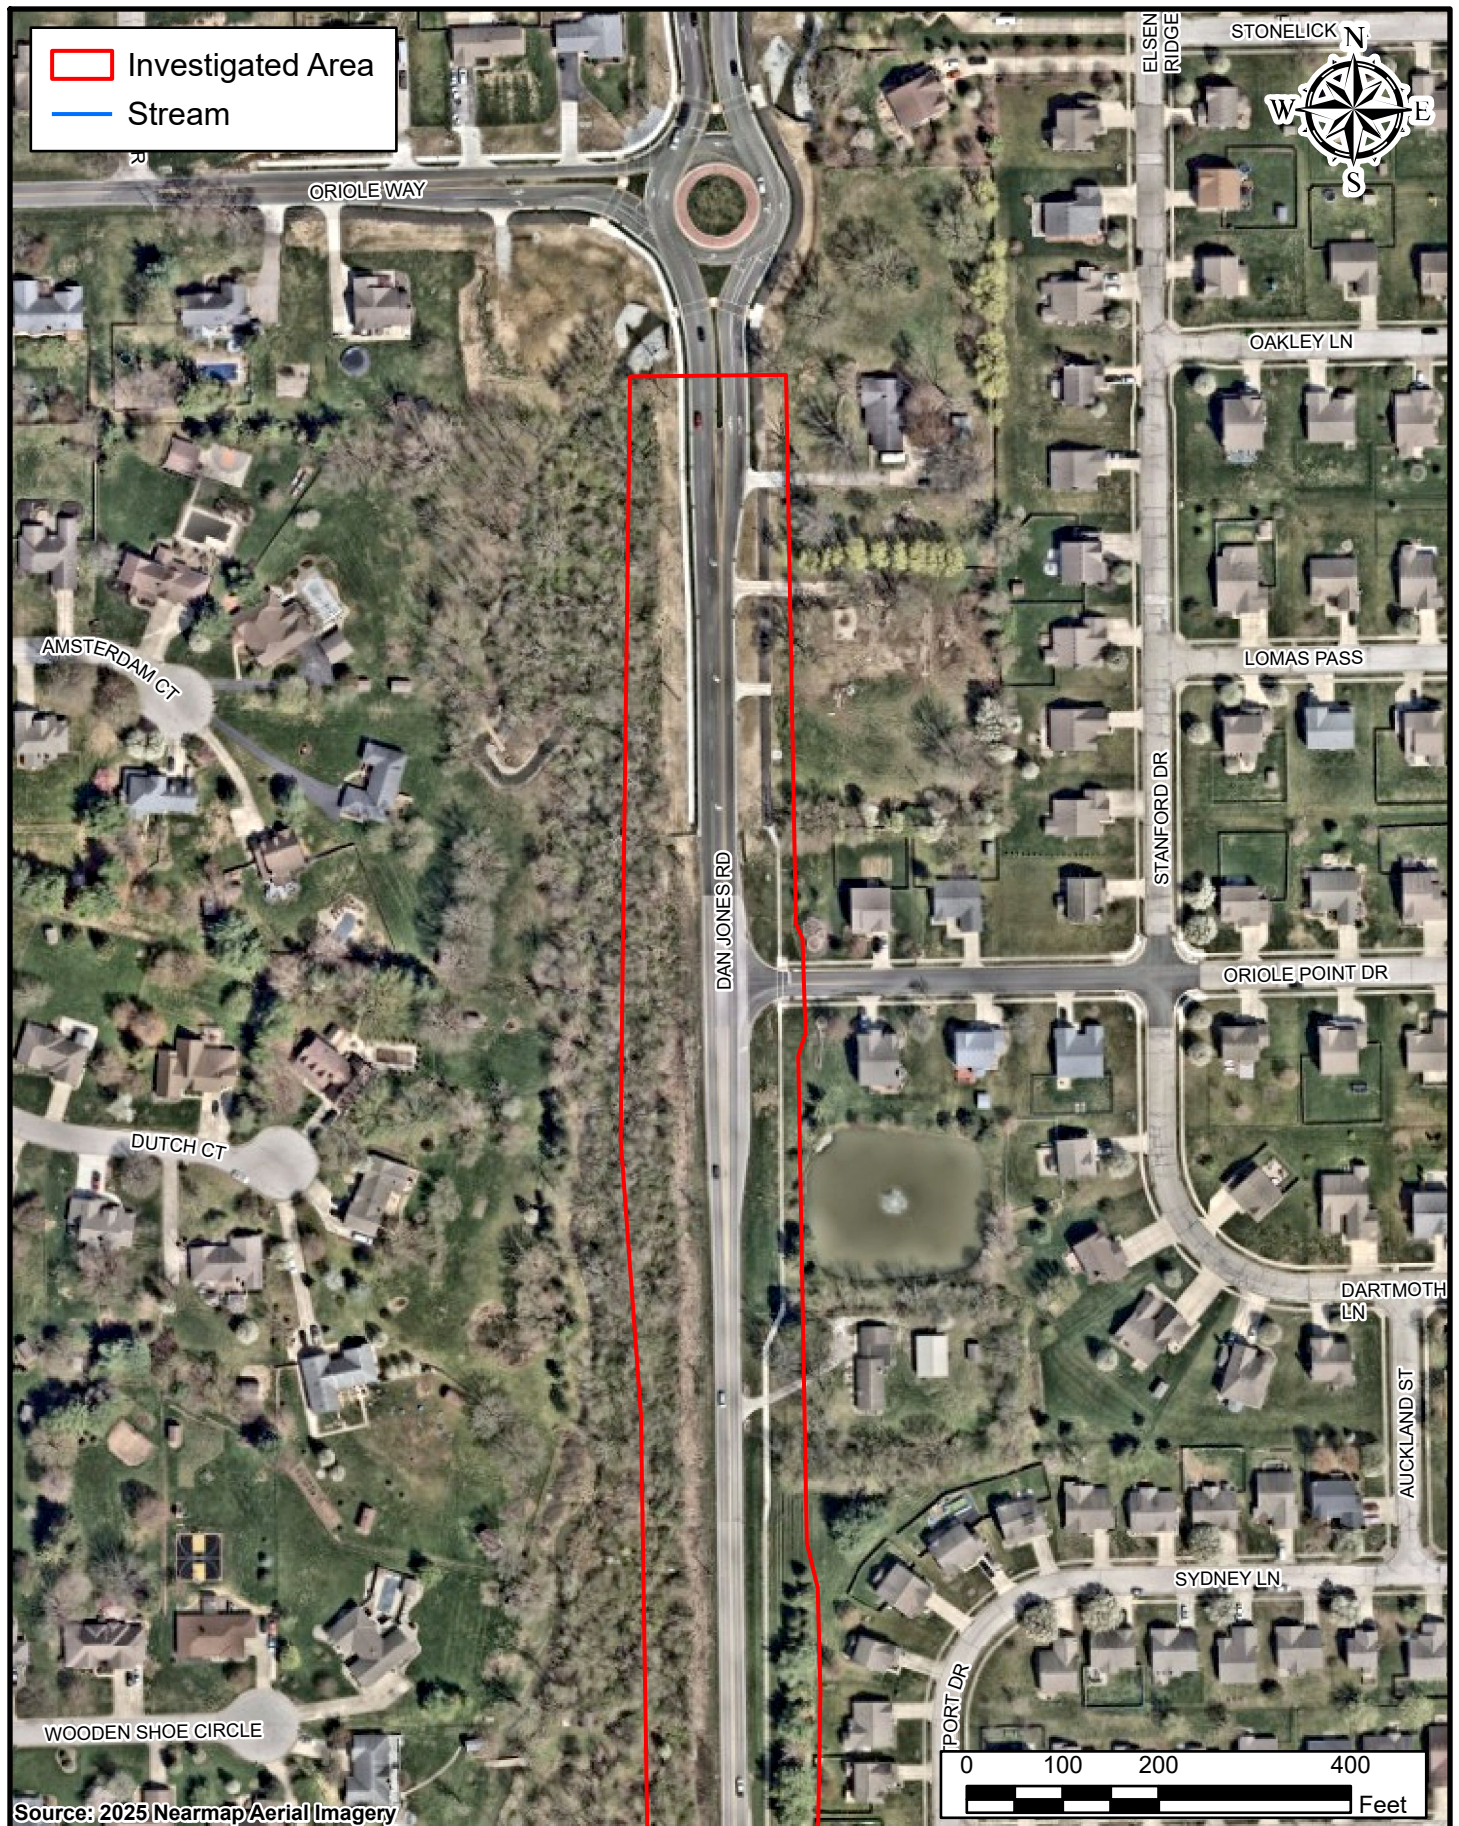


Figure 9: Water Resources Map



Town of Avon
6570 U.S. Highway 36
Avon, Indiana 46123


Dan Jones Road Reconstruction (Phase 4)
Des No. 2401FFE

Location: Avon
Township: Washington
County: Hendricks
State: Indiana

Date: 6/27/2025

SEC. 23, T 15 N, R 1 E
WASHINGTON TOWNSHIP
HENDRICKS COUNTY

SEC. 14, T 15 N, R 1 E
WASHINGTON TOWNSHIP
HENDRICKS COUNTY

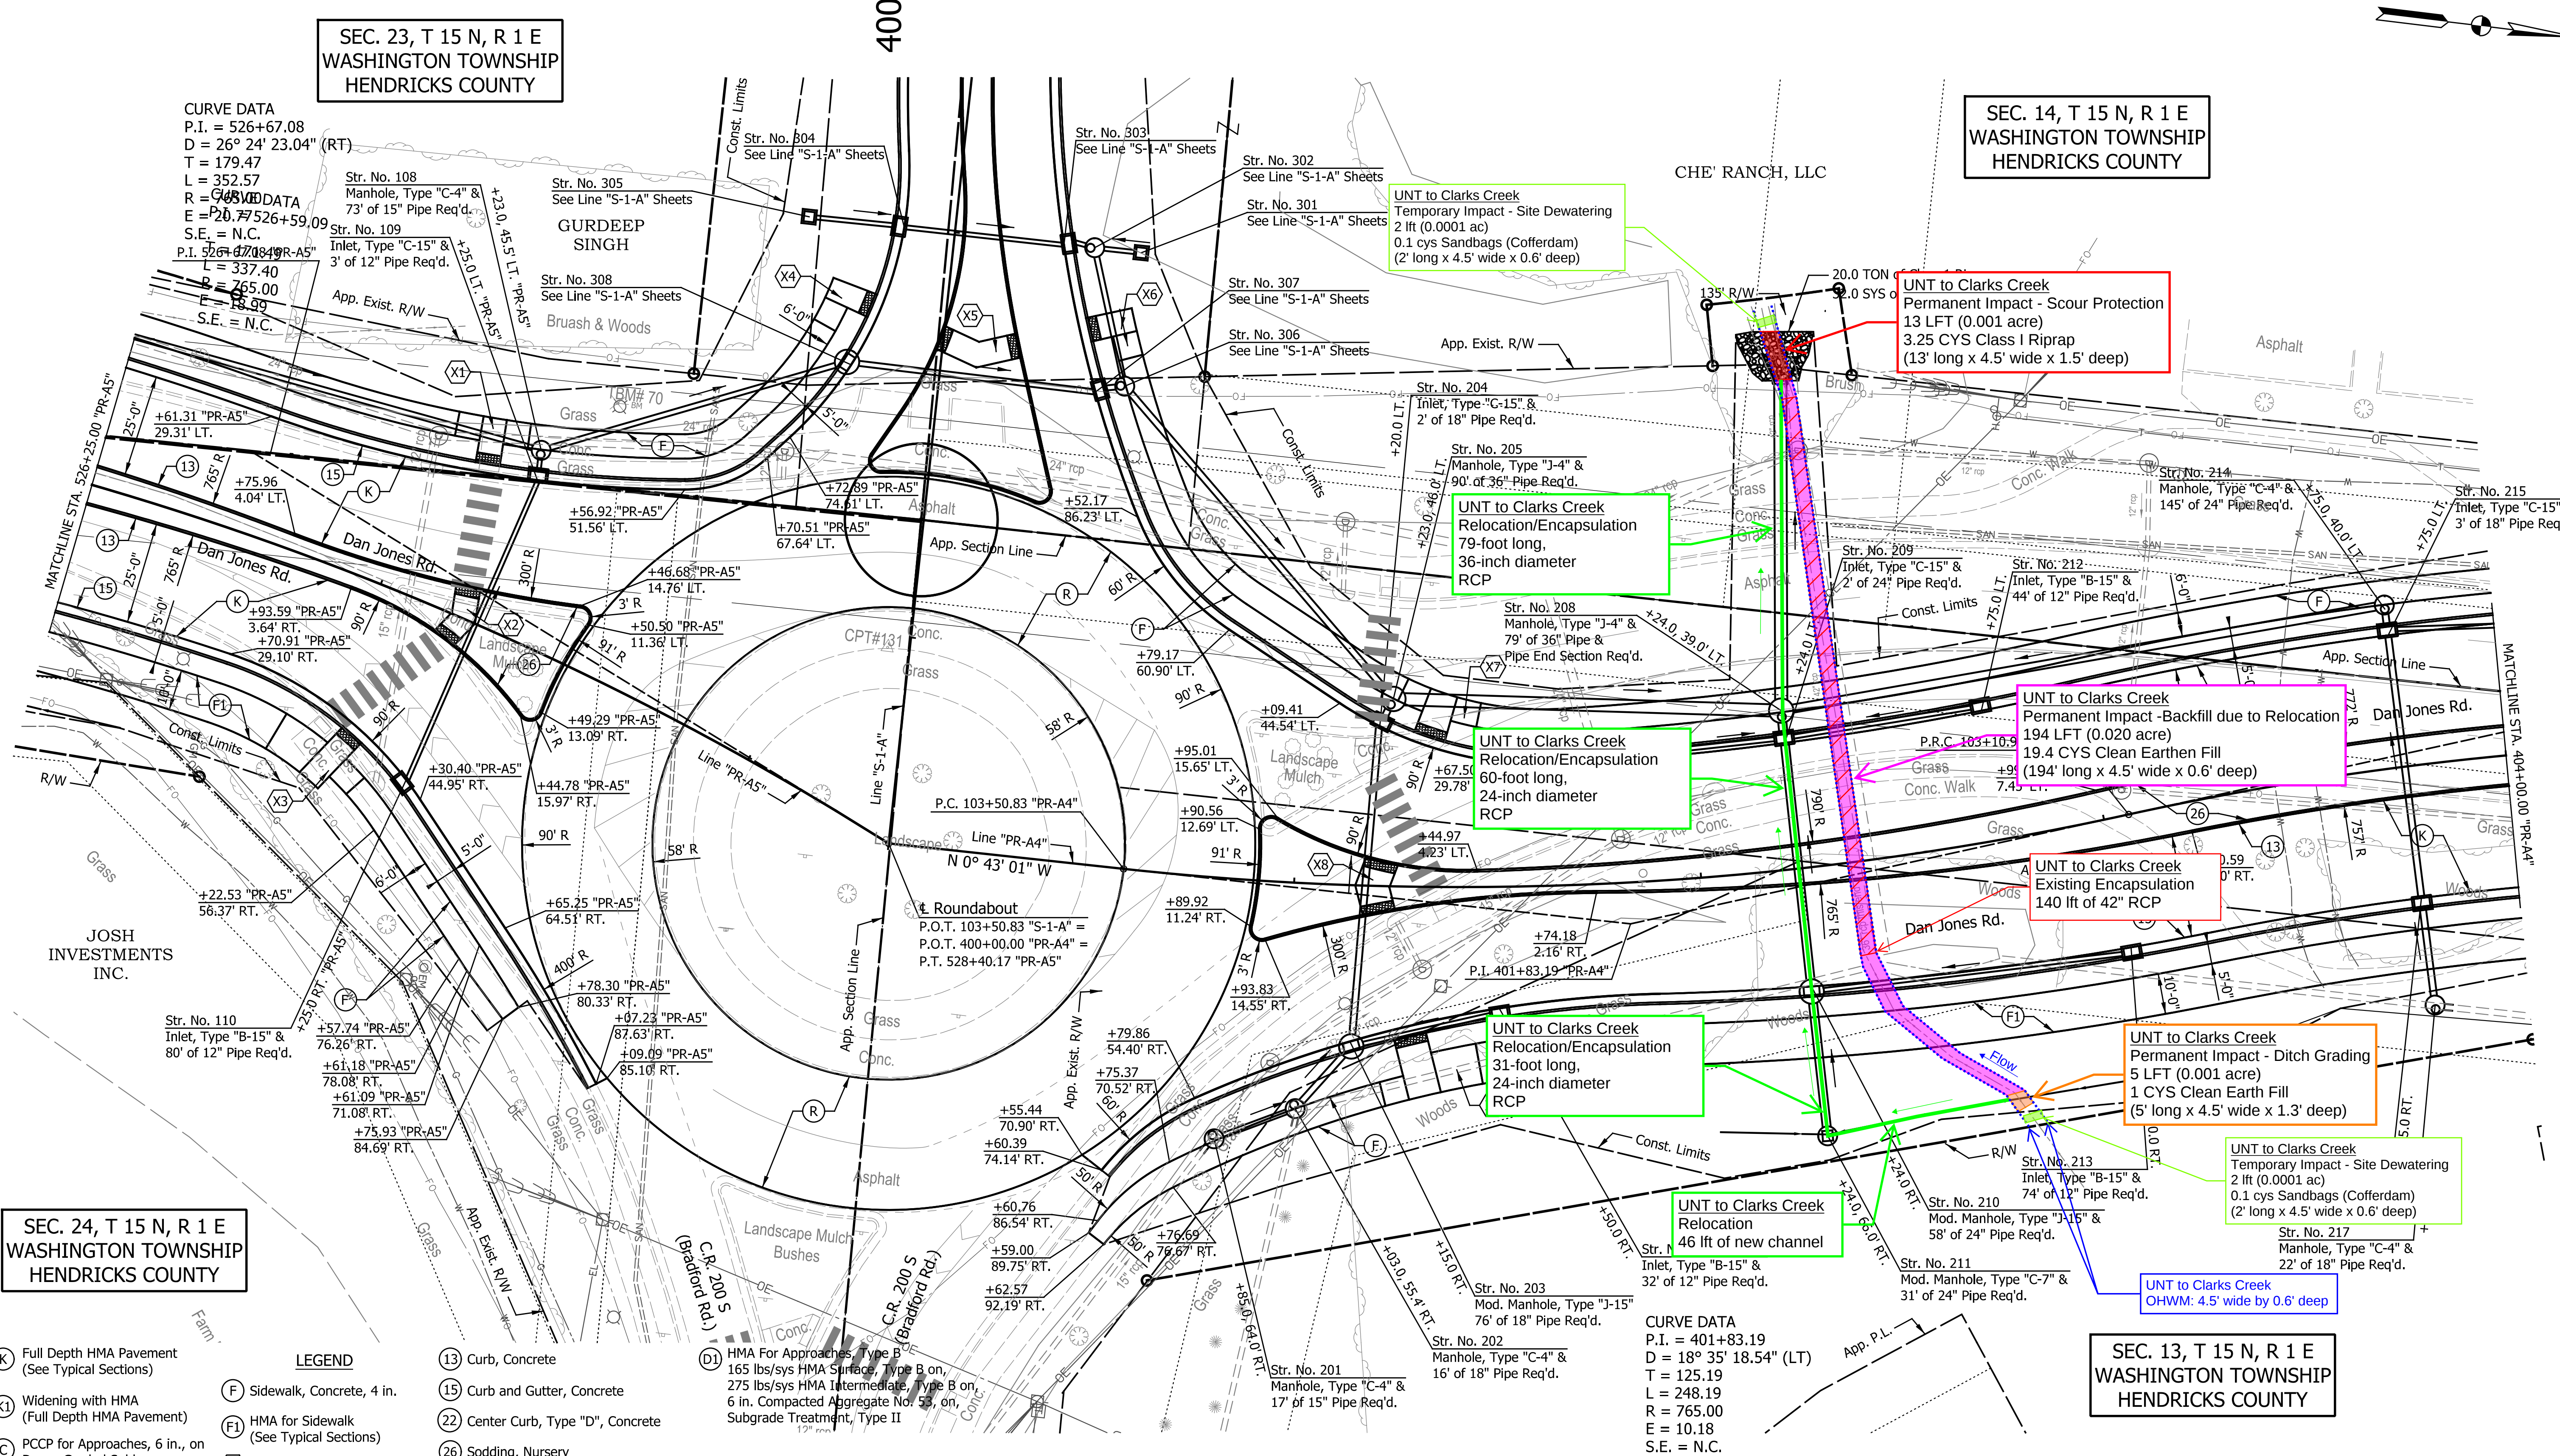

SEC. 24, T 15 N, R 1 E
WASHINGTON TOWNSHIP
HENDRICKS COUNTY

SEC. 13, T 15 N, R 1 E
WASHINGTON TOWNSHIP
HENDRICKS COUNTY

- LEGEND**
- (K) Full Depth HMA Pavement (See Typical Sections)
 - (K1) Widening with HMA (Full Depth HMA Pavement)
 - (C) PCCP for Approaches, 6 in., on Dense Graded Subbase, on Subgrade Treatment Type II
 - (R) Milling, Asphalt, 1.5 in. and Resurface (See Typical Sections)
 - (F) Sidewalk, Concrete, 4 in.
 - (F1) HMA for Sidewalk (See Typical Sections)
 - (X) Curb Ramp
 - (13) Curb, Concrete
 - (15) Curb and Gutter, Concrete
 - (22) Center Curb, Type "D", Concrete
 - (26) Sodding, Nursery
 - (D) HMA For Approaches, Type C (Full Depth HMA Pavement)
 - (S) Sawcut


Permanent/Temporary
Impact Exhibit

RECOMMENDED FOR APPROVAL	DESIGN ENGINEER	DATE
DESIGNED: HH	DRAWN: BLP	
CHECKED: TMK	CHECKED: TMK	

TOWN OF AVON
CONSTRUCTION DETAILS
LINE "PR-A4"

HORIZONTAL SCALE	BRIDGE FILE
1"=20'	N/A
VERTICAL SCALE	DESIGNATION
N/A	N/A
SURVEY BOOK	SHEETS
N/A	18 of 70
CONTRACT	PROJECT
N/A	N/A

NOTE:
All R/W Described from Line "PR-A4" Except as Shown.
All Radii are Measured from Front Face of Curb, Except as Shown.

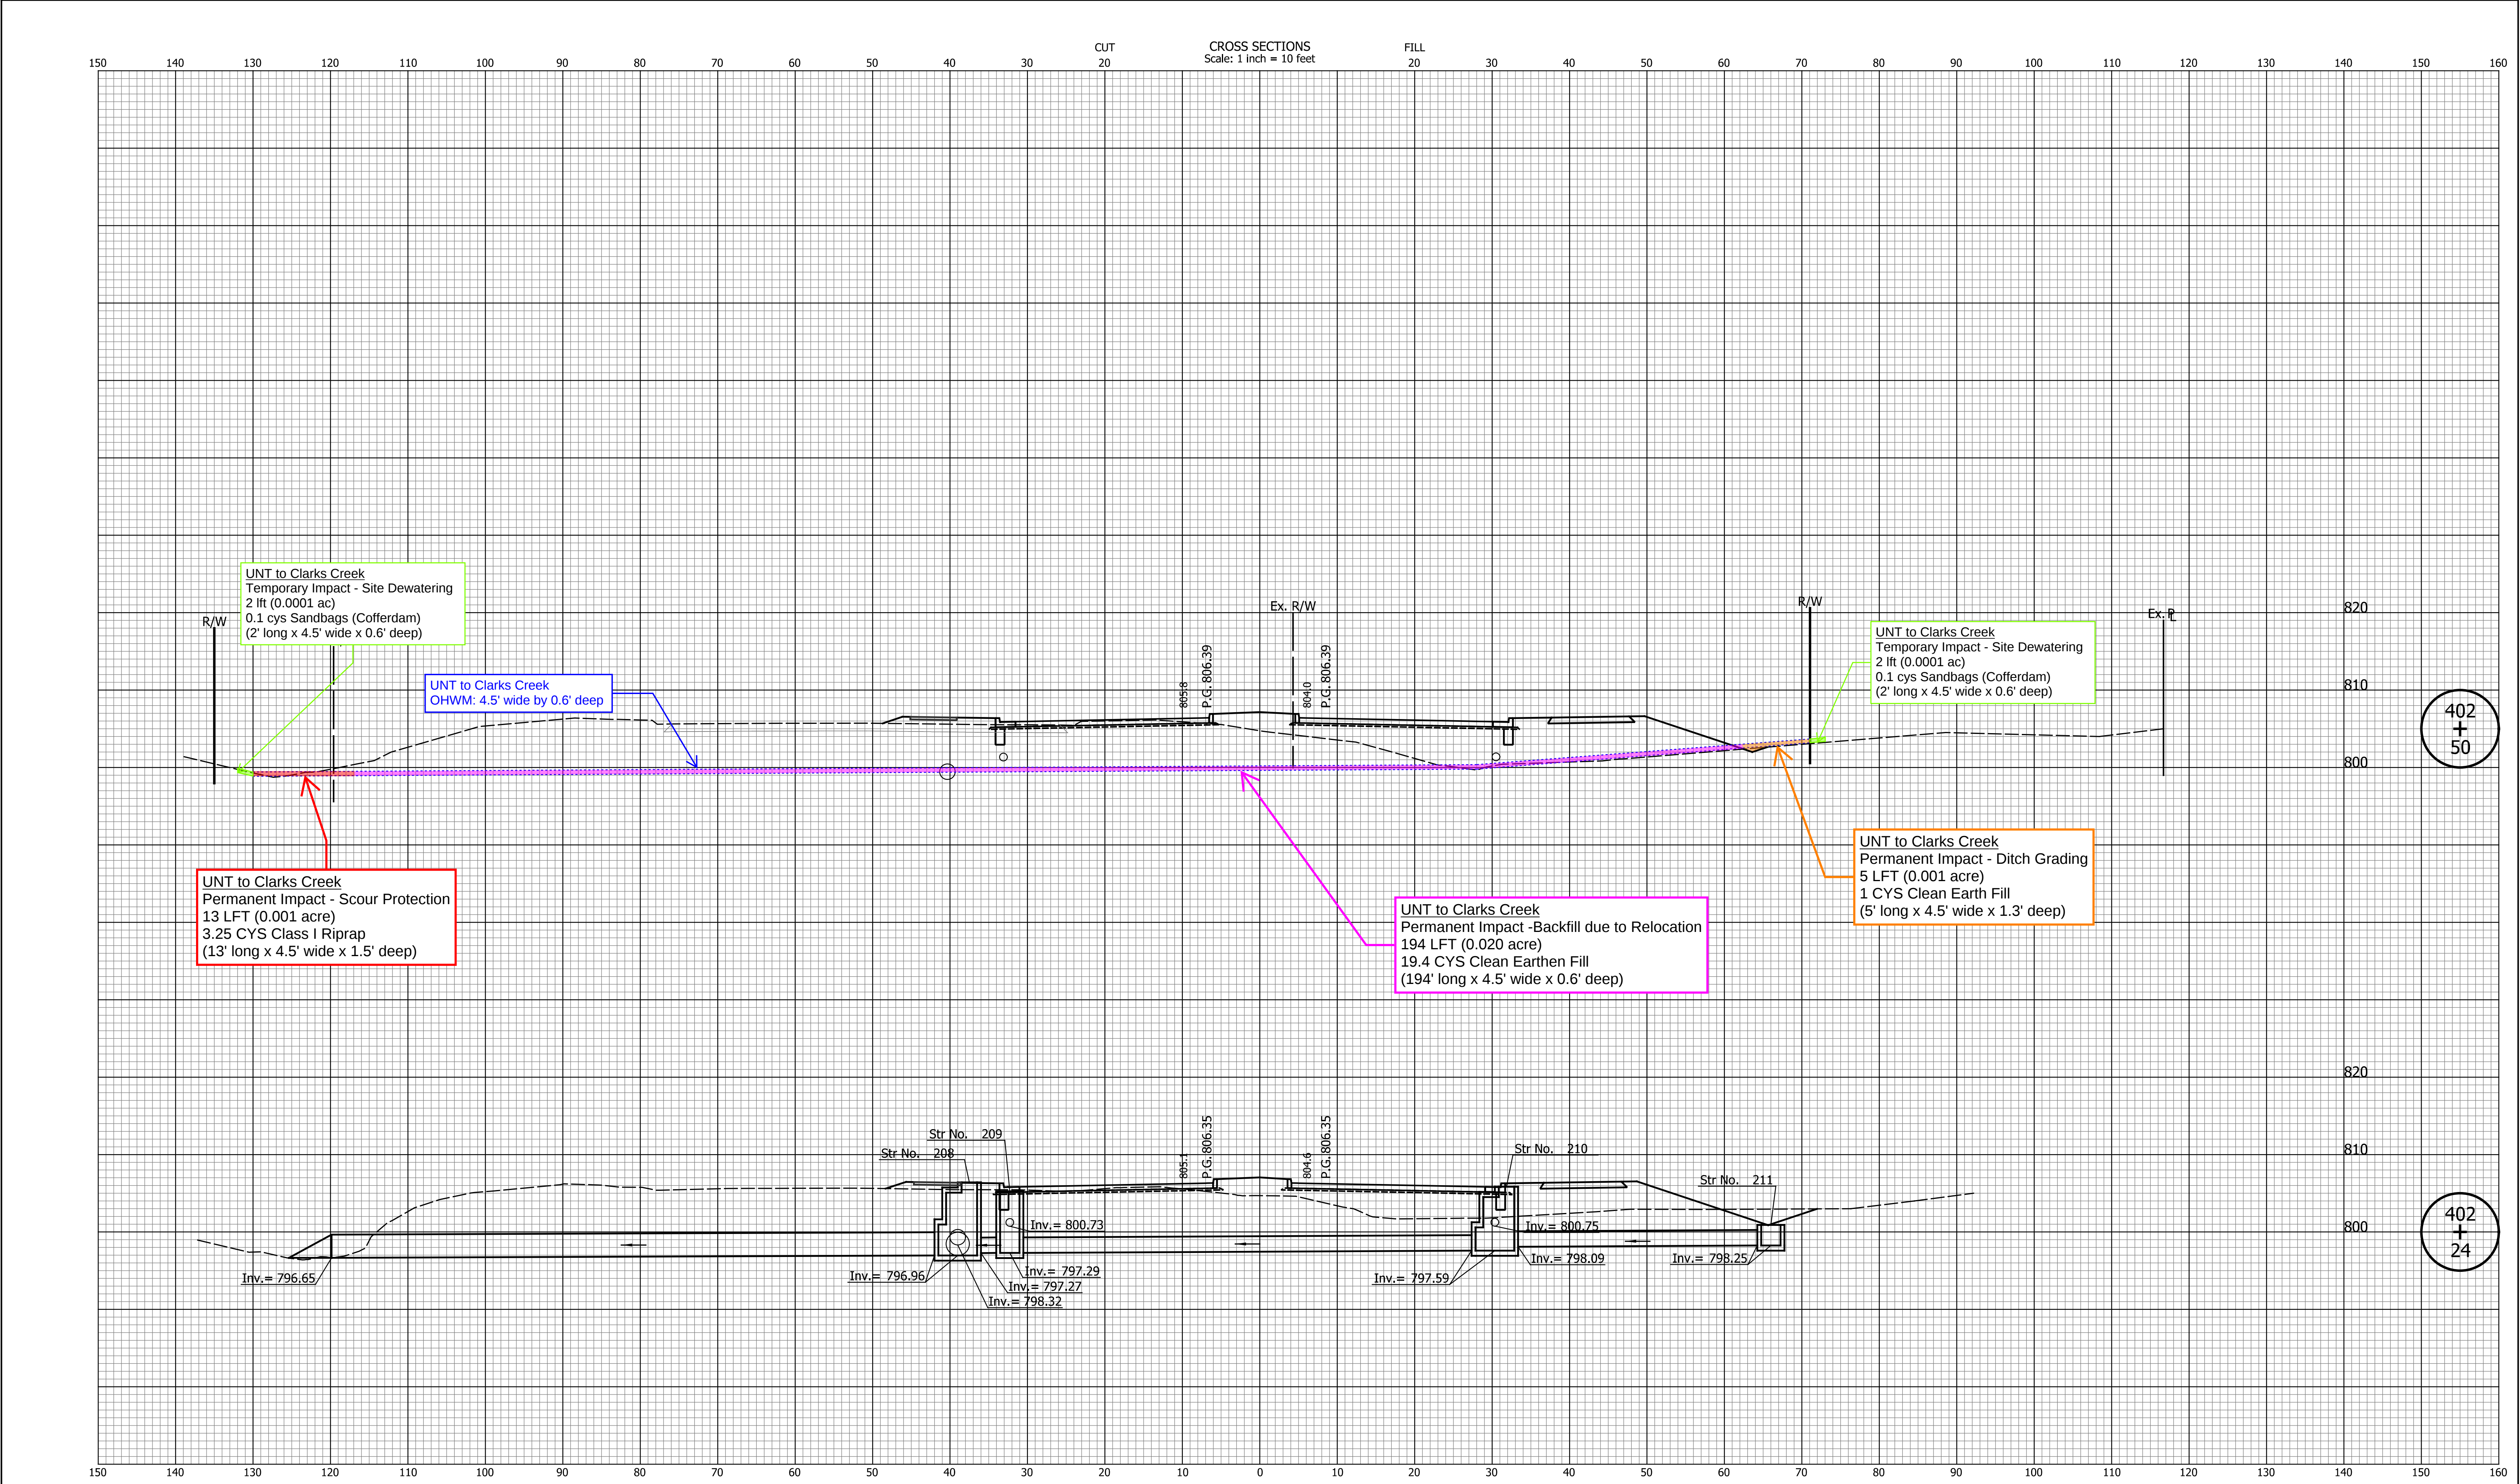


DATE	REVISION


RECOMMENDED FOR APPROVAL	DESIGN ENGINEER	DATE
DESIGNED: HH	DRAWN: HH	
CHECKED: TMK	CHECKED: TMK	

TOWN OF AVON
CROSS SECTIONS LINE "PR-A4"

HORIZONTAL SCALE 1"=10'	BRIDGE FILE N/A
VERTICAL SCALE 1"=10'	DESIGNATION N/A
SURVEY BOOK N/A	SHEETS 47 of 70
CONTRACT N/A	PROJECT N/A

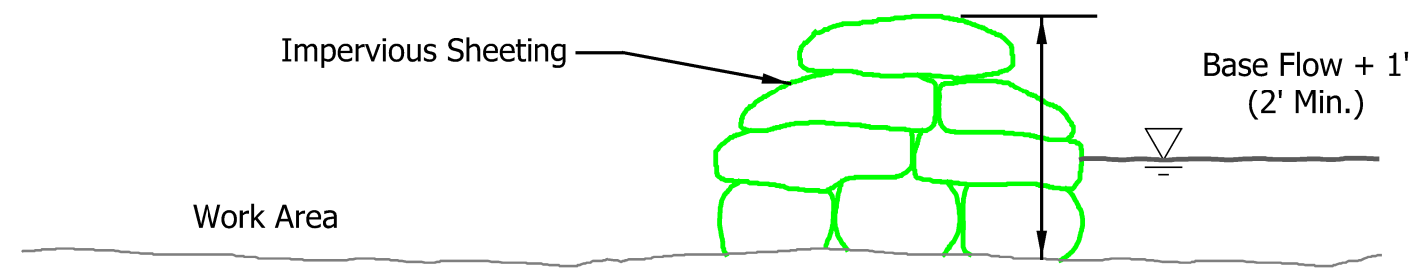

SECTION B-B

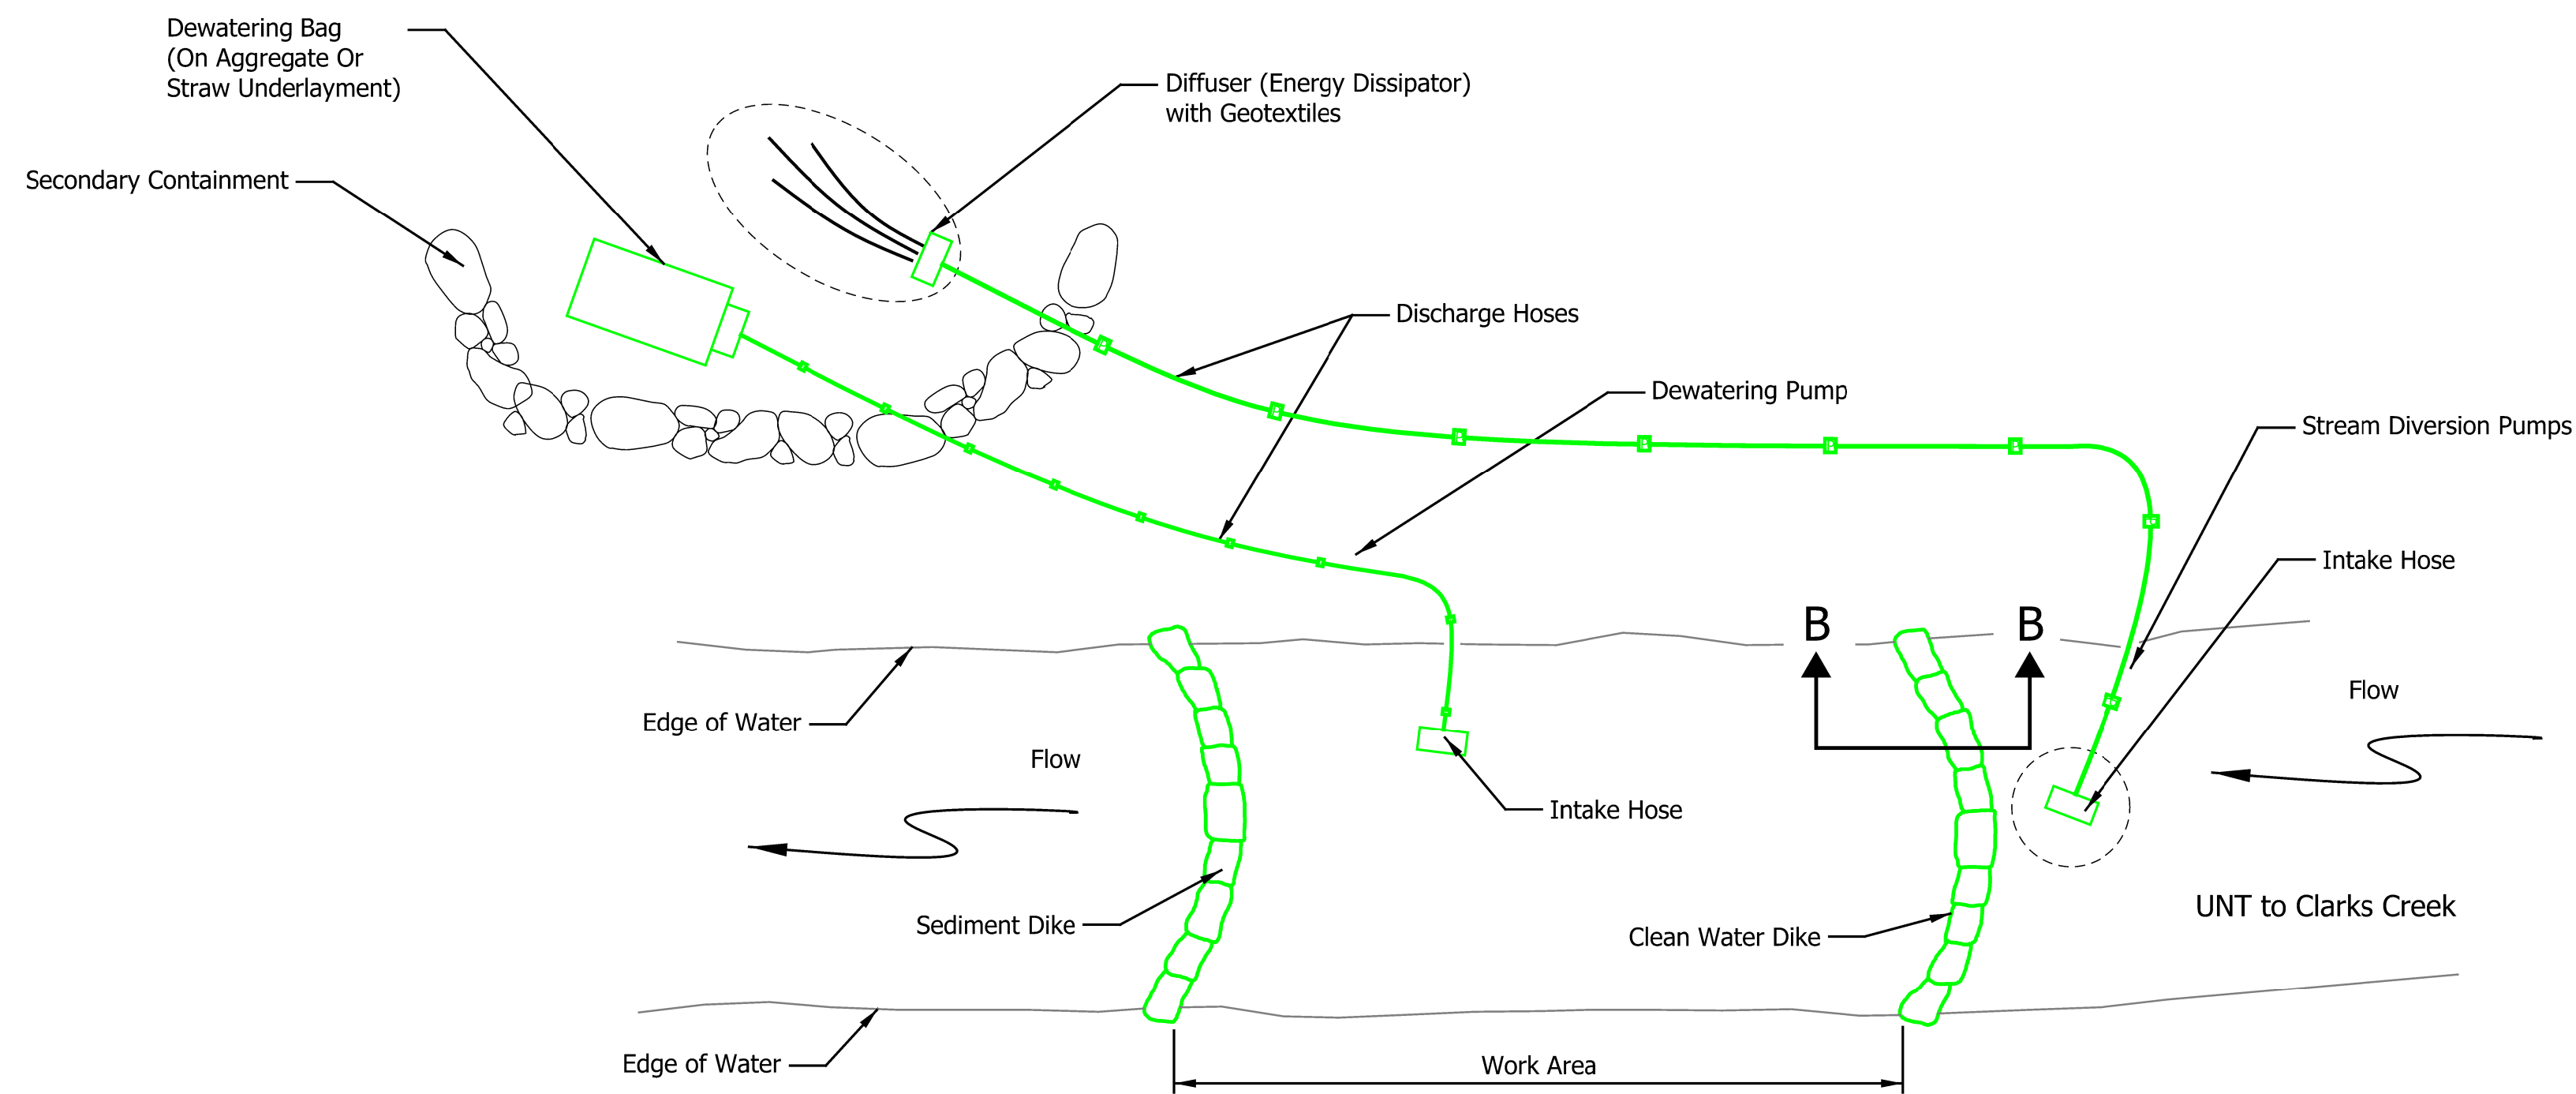

PLAN VIEW

TEMPORARY PUMP AROUND

No Scale

Approximate Duration for Temporary Impacts = 30 Days

DATE	REVISION			RECOMMENDED FOR APPROVAL	DESIGN ENGINEER	DATE	TOWN OF AVON	HORIZONTAL SCALE	BRIDGE FILE
								N/A	N/A
								VERTICAL SCALE	DESIGNATION
								N/A	N/A
								SURVEY BOOK	SHEETS
								N/A	1 of 1
								CONTRACT	PROJECT
								N/A	N/A

DESIGNED: HH	DRAWN: BLP
CHECKED: TMK	CHECKED: TMK

TEMPORARY PUMP AROUND DETAILS	
-------------------------------	--

SEC. 23, T 15 N, R 1 E
WASHINGTON TOWNSHIP
HENDRICKS COUNTY

SEC. 14, T 15 N, R 1 E
WASHINGTON TOWNSHIP
HENDRICKS COUNTY

SEC. 24, T 15 N, R 1 E
WASHINGTON TOWNSHIP
HENDRICKS COUNTY

SEC. 13, T 15 N, R 1 E
WASHINGTON TOWNSHIP
HENDRICKS COUNTY

CURVE DATA
P.I. = 526+67.08
D = 26° 24' 23.04" (RT)
T = 179.47
L = 352.57
R = 968.50
E = 20.77
S.E. = N.C.
P.I. = 526+67.08
L = 337.40
B = 765.00
E = 18.99
S.E. = N.C.

CURVE DATA
P.I. = 401+83.19
D = 18° 35' 18.54" (LT)
T = 125.19
L = 248.19
R = 765.00
E = 10.18
S.E. = N.C.

Existing stream channel to be backfilled

Relocated stream route

Intercepted drainage route

(K)	Full Depth HMA Pavement (See Typical Sections)		(13)	Curb, Concrete
(K1)	Widening with HMA (Full Depth HMA Pavement)	(F)	(15)	Curb and Gutter, Concrete
(C)	PCCP for Approaches, 6 in., on Dense Graded Subbase, on Subgrade Treatment Type II	(F1)	(22)	Center Curb, Type "D", Concrete
		(X)	(26)	Sodding, Nursery
(R)	Milling, Asphalt, 1.5 in. and Resurface (See Typical Sections)		(D)	HMA For Approaches, Type C (Full Depth HMA Pavement)
			(S)	Sawcut

Flow area to relocated UNT reduced due to the intercepted pipes from existing conditions. Therefore reduction in pipe size

UNT to Clarks Creek
Relocation/Encapsulation
31-foot long,
24-inch diameter
RCP

UNT to Clarks Creek
Relocation/Encapsulation
79-foot long,
36-inch diameter
RCP

67.5
0.78'

UNT to Clarks Creek
Relocation/Encapsulation
60-foot long,
24-inch diameter
RCP

UNT to Clarks Creek
Existing Encapsulation
140 lft of 42" RCP

Existing 18" RCP being intercepted and rerouted

UNT to Clarks Creek
OHWM: 4.5' wide by 0.6' deep

Hydraulic Exhibit

TOWN OF AVON

CONSTRUCTION DETAILS
LINE "PR-A4"

	HORIZONTAL SCALE	BRIDGE FILE		
	1"=20'	N/A		
	VERTICAL SCALE	DESIGNATION		
	N/A	N/A		
	SURVEY BOOK	SHEETS		
	N/A	18	of	70
	CONTRACT	PROJECT		
	N/A	N/A		