GENERAL NOTES

1. This drawing shall be used where W-beam guardrail is specified along a two-lane two-way roadway to shield the piers of overhead structures.

2. The details on this drawing are typical guardrail layouts for shielding the piers of a single overhead structure. The required length of guardrail shall be determined in accordance with Tables RPPG-1 and RPPG-2, and shall be as shown on the plans.

3. Dimensions and details not shown on this drawing shall be as shown on the plans.

4. See Standard Drawing E 601-RPPG-03 for tables RPPG-1 and RPPG-2.

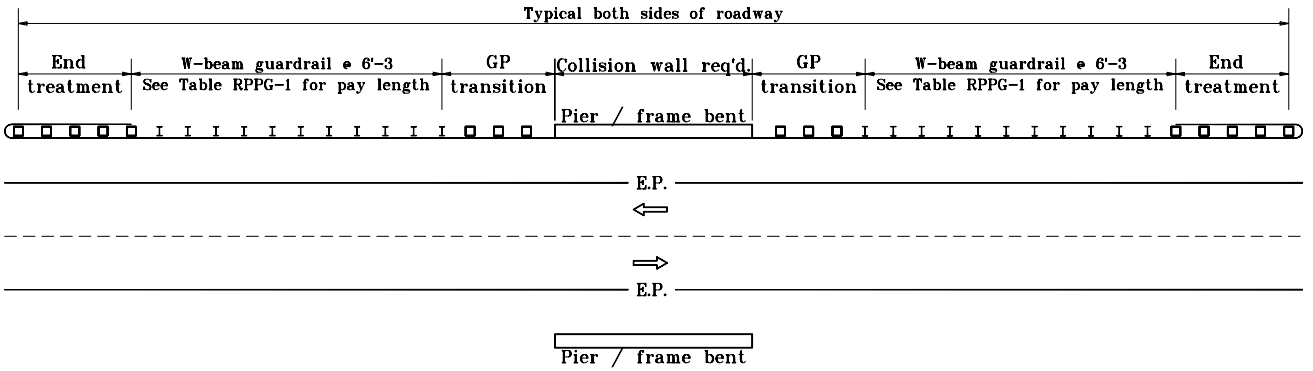

TWO-LANE TWO-WAY WITH SINGLE OVERHEAD STRUCTURE AND PIER TO E.P. ≤ 16'-0

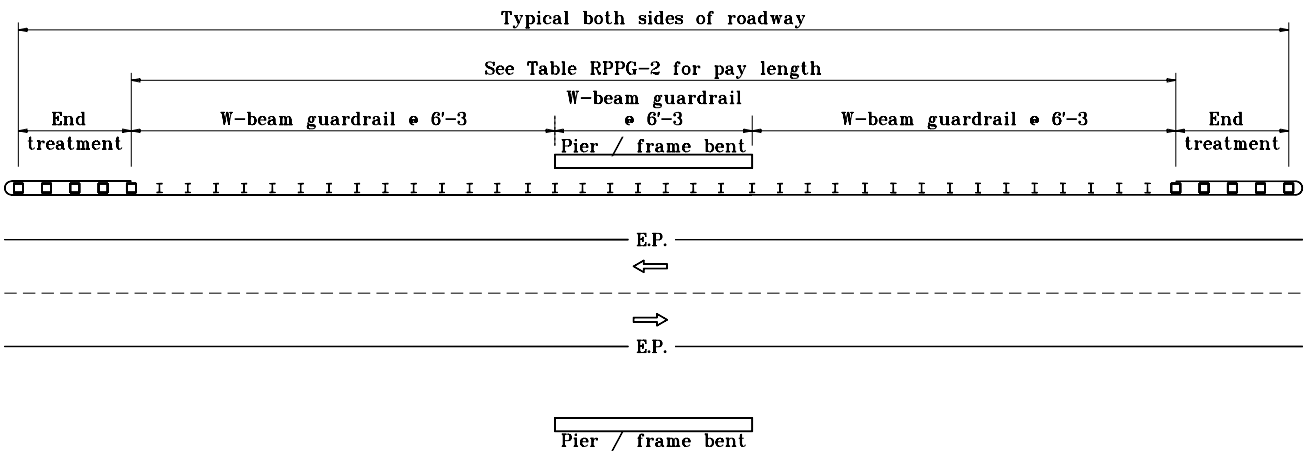

TWO-LANE TWO-WAY WITH SINGLE OVERHEAD STRUCTURE AND PIER TO E.P. > 16'-0

INDIANA DEPARTMENT OF TRANSPORTATION

ROADSIDE PIER PROTECTION GUARDRAIL

APRIL 1995

STANDARD DRAWING NO. **E 601-RPPG-04**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

DETAILS PLACED IN THIS FORMAT 11-15-99

/s/ Anthony L. Uremovich 11-15-99
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 11-15-99
CHIEF HIGHWAY ENGINEER DATE

ORIGINALLY APPROVED 4-03-95