## J HOOKS

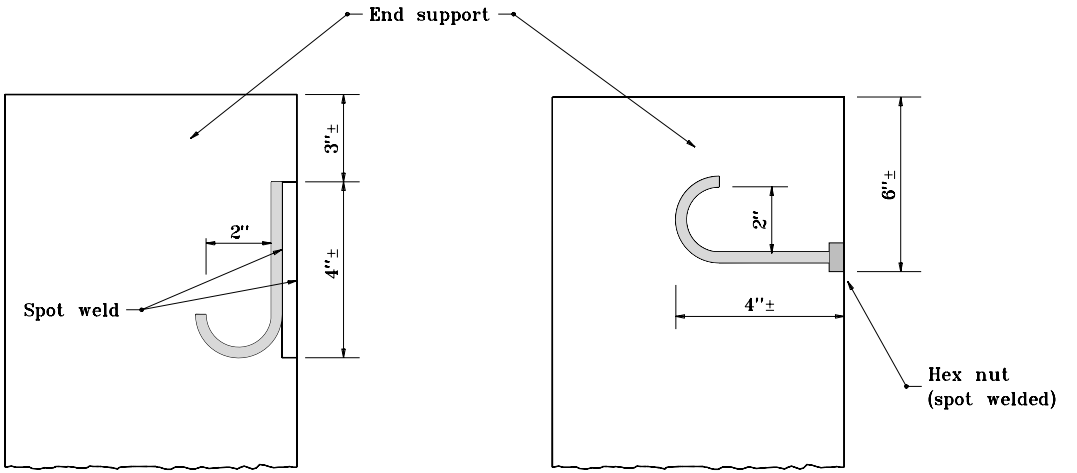


**TYPE A** **TYPE B**

**NOTES:**

1. Type A hook shall consist of two $\frac{1}{4}$ in. to $\frac{3}{8}$ in. stainless steel bars, constructed as shown in detail above and spot welded to inside of the end support.

2. Type B hook shall consist of one $\frac{1}{4}$ in. to $\frac{3}{8}$ in. stainless steel bar shaped as shown in detail above, threaded on straight end and fastened to inside by means of a hex nut spot welded to the end support.

INDIANA DEPARTMENT OF TRANSPORTATION

**SIGN STRUCTURE TRUSS DETAILS**

SEPTEMBER 2001

STANDARD DRAWING NO. **E 802-SNOH-02**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

/s/ Anthony L. Uremovich 9-04-01
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 9-04-01
CHIEF HIGHWAY ENGINEER DATE