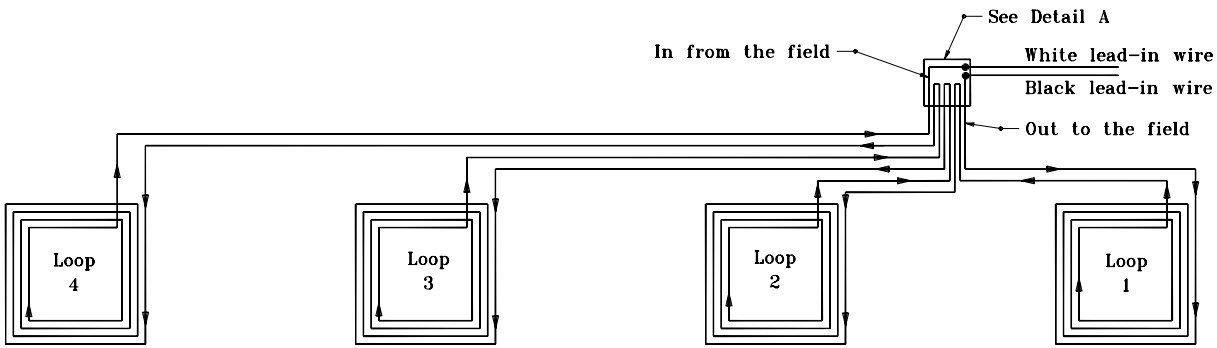


## LOOP WIRING DIAGRAM

## GENERAL NOTES

1. Duct loop wires to be twisted around each other a minimum of 5 turns/ft then coiled and tied with self-locking strips.
2. Loop wires to be tagged in or out as indicated.
3. See splice detail (waterproofing) on Standard Drawing E 805-SGLI-04.

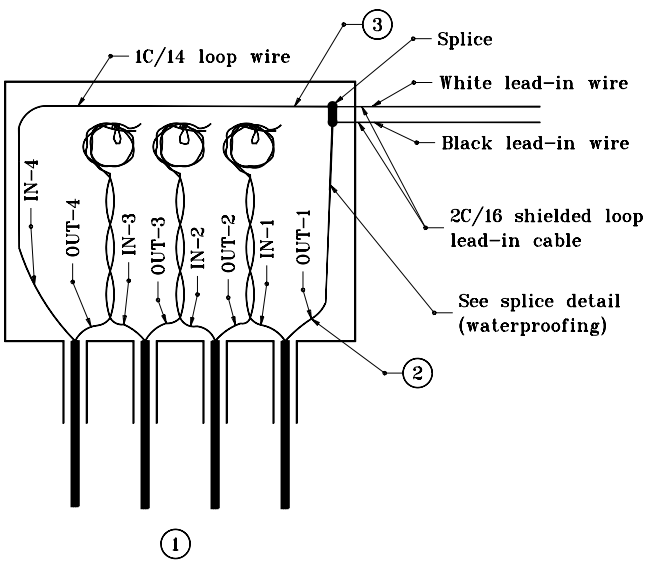


## DETAIL A
## DETECTOR HOUSING WIRING

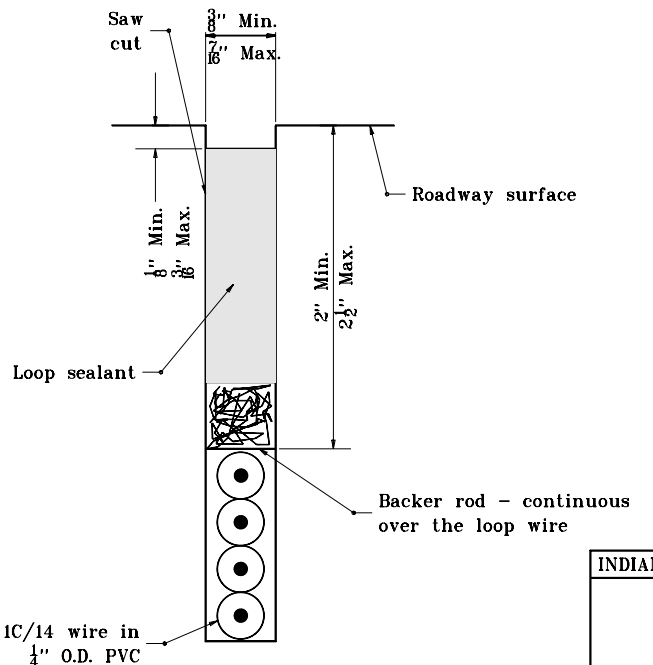


## LOOP SAW-CUT DETAIL
## SECTION B-B

INDIANA DEPARTMENT OF TRANSPORTATION

# TRAFFIC SIGNAL LOOP INSTALLATION

MARCH 1995

STANDARD DRAWING NO. **E 805-SGLI-02**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

| | |
|---|---|
| DETAILS PLACED IN THIS FORMAT | 11-15-99 |
| /s/ Anthony L. Uremovich<br>DESIGN STANDARDS ENGINEER | 11-15-99<br>DATE |
| /s/ Firooz Zandi<br>CHIEF HIGHWAY ENGINEER | 11-15-99<br>DATE |
| ORIGINALLY APPROVED | 3-01-95 |