GENERAL NOTES

1. S = Normal width of bituminous shoulder as shown on plans.
2. W = Width of mailbox approach at mailbox.
   W = 3600 preferred, 3000 minimum for A.D.T. equal to or greater than 1500.
   W = 3000 preferred, 2400 minimum for A.D.T. of 100 or greater, and less than 1500.
3. Mailbox approach pavement material shall be the same as the shoulder material.

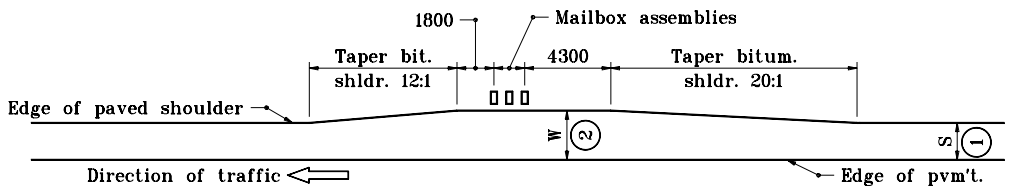

TYPICAL MAILBOX APPROACH

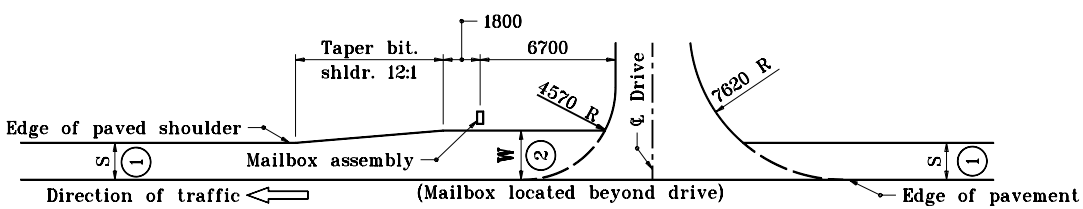

COMBINATION MAILBOX APPROACH & DRIVE

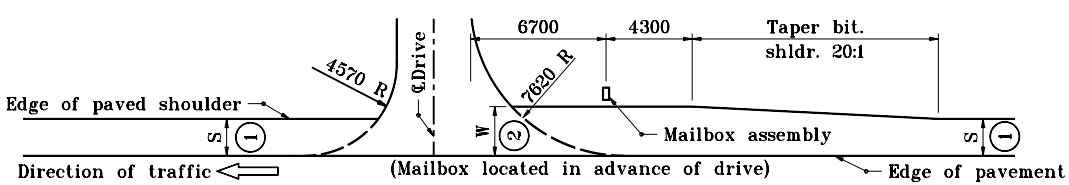

COMBINATION MAILBOX APPROACH & DRIVE

All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION

MAILBOX APPROACH PLAN VIEWS

SEPTEMBER 1999

STANDARD DRAWING NO. **611-MBAP-01**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

/s/ Anthony L. Uremovich 9-01-99
DESIGN STANDARDS ENGINEER DATE

/s/ Donald W. Lucas 9-01-99
CHIEF HIGHWAY ENGINEER DATE

DESIGN STANDARDS ENGINEER

Source Sheet: MH3