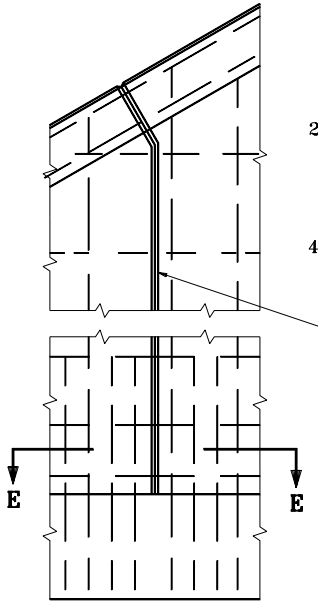

FRONT FACE
WINGS

25 mm chamfer strips

40 mm chamfer strips

2-20 mm chamfers

2-25 mm chamfers

Top ftg.

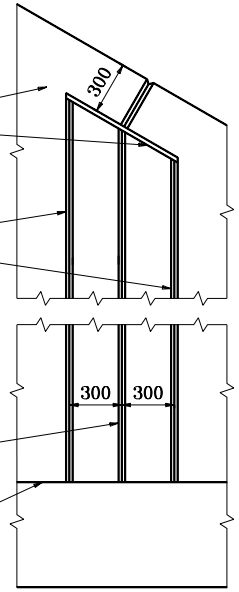

REAR FACE
WINGS

R.F. wall

Construction joint

F.F. wall



SECTION E-E

Fabric to cover entire construction joint. Caulk securely into grooves. Fabric and V-Strips to be placed at construction joints in mudwall of R.C.G. superstructures.

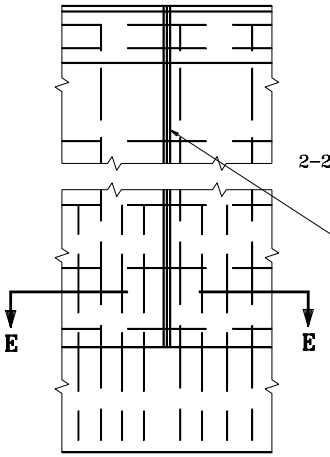

FRONT FACE
ABUTMENTS

2-25 mm chamfer strips

2-20 mm chamfers

40 mm chamfers

Top ftg.

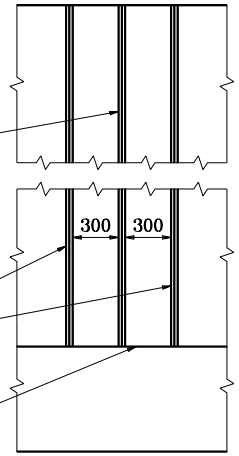

REAR FACE
ABUTMENTS

All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION

CONSTRUCTION JOINT TYPICAL DETAILS

SEPTEMBER 1994

STANDARD DRAWING NO. **724-BJTS-05**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

/s/ Anthony L. Uremovich 9/30/94
DESIGN STANDARDS ENGINEER DATE

/s/ Donald W. Lucas 9/30/94
CHIEF HIGHWAY ENGINEER DATE

Source Sheet: C-3