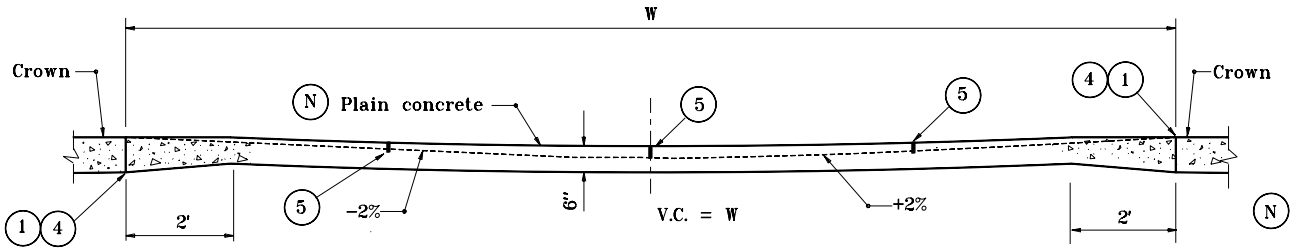

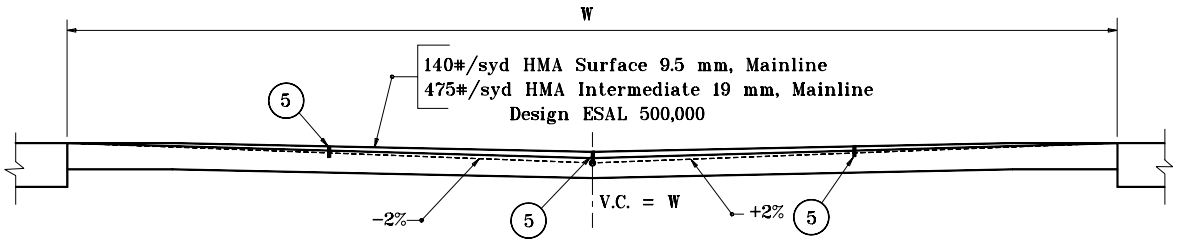

SECTION A–A
TO BE USED WITH CROWN PAVEMENTS.

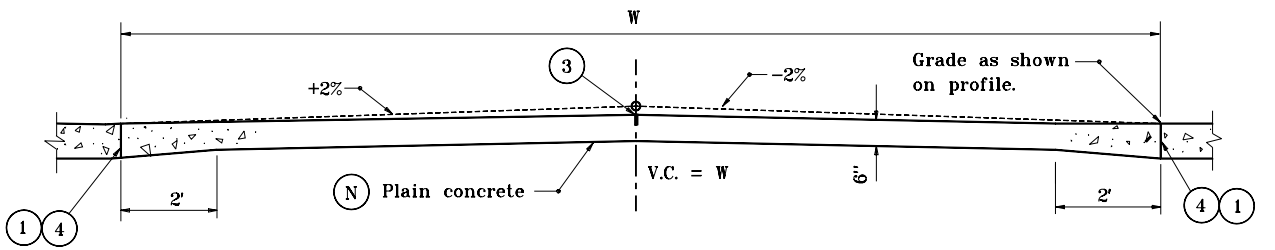

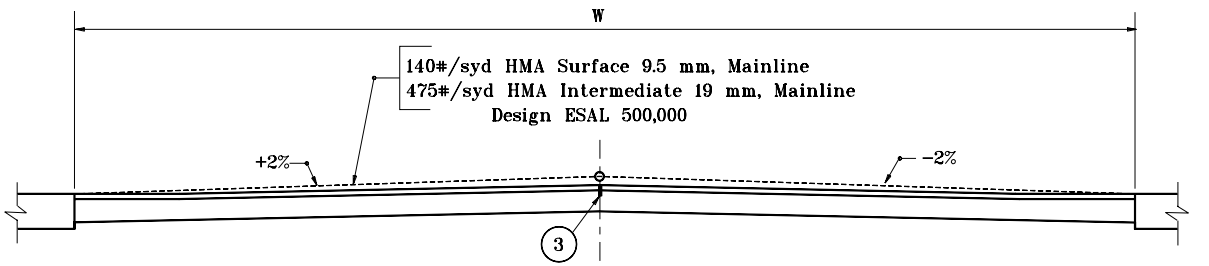

SECTION B–B
TO BE USED WITH 3 in. TILTED PAVEMENTS

NOTES :

(N) Private drive crossover shall be constructed of a flexible pavement unless otherwise directed by the Engineer.

(1) Thickened edge to the mainline thickness or 8" min. for plain concrete crossovers.

2. For location of cross sections see Standard Drawing E 610–DRIV–17.

(3) Contraction joint type D–1, see Standard Drawing E 501–CCPJ–06 for details.

(4) Keyway construction joint, see Standard Drawing E 610–DRIV–16 for details.

(5) 1" preformed joint filler

INDIANA DEPARTMENT OF TRANSPORTATION

PRIVATE DRIVE CROSSOVERS
CROSS SECTIONS
JANUARY 2000

STANDARD DRAWING NO. **E 610–DRIV–18**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

/s/ Anthony L. Uremovich — DESIGN STANDARDS ENGINEER — 1–03–00 DATE

/s/ Firooz Zandi — CHIEF HIGHWAY ENGINEER — 1–03–00 DATE