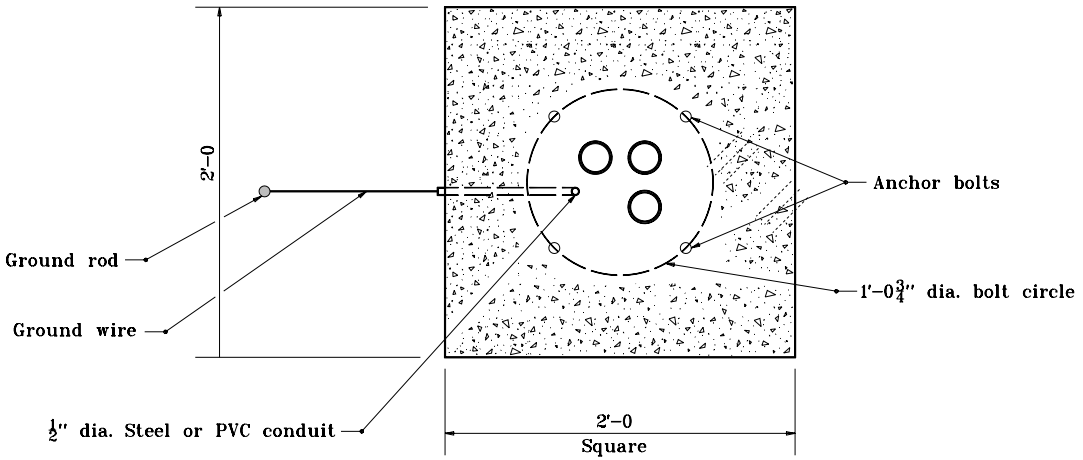

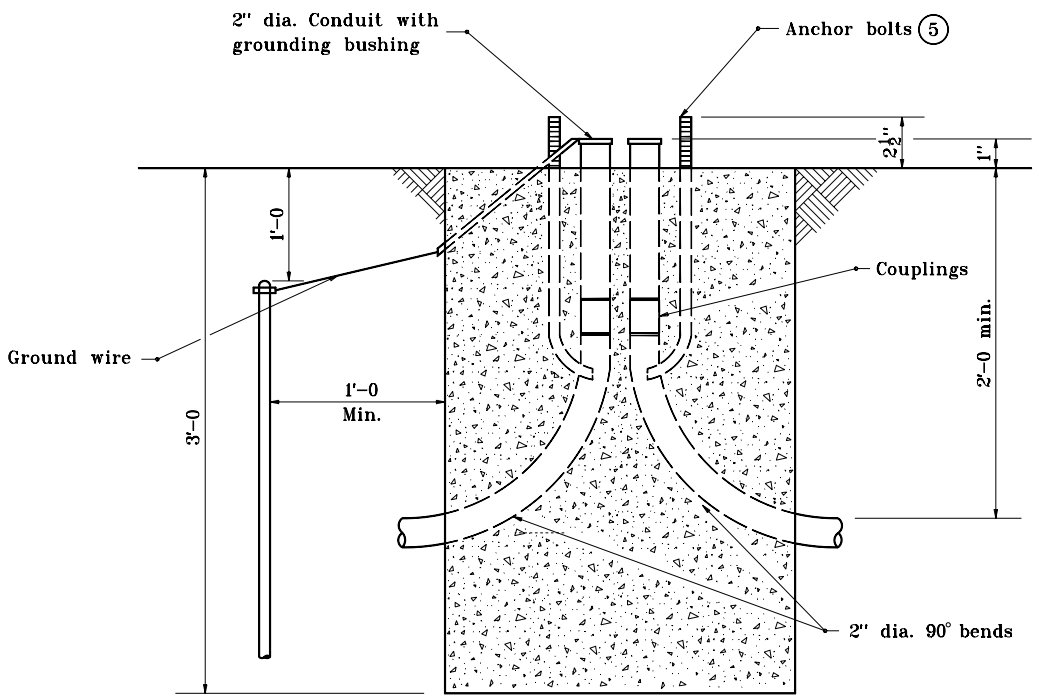

GENERAL NOTES

1. Concrete walk shall be constructed of the same class of concrete as the foundation.
2. A minimum of three 2 in. dia. conduit inlets shall be installed per foundation.
3. Conduit inlets not used shall be capped below grade. More inlets shall be installed as required on plans.
4. Foundation types P-1 and M shall conform to all minor differences of individual designs for all accepted cabinets.

5 See Standard Drawing E 805-SGPB-01 for anchor bolt details.

6 For sidewalk installation, the concrete footpad shall be flush with the sidewalk.

INDIANA DEPARTMENT OF TRANSPORTATION

SIGNAL PEDESTAL FOUNDATION TYPE A

SEPTEMBER 1998

STANDARD DRAWING NO. **E 805-SGCF-03**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

DETAILS PLACED IN THIS FORMAT	11-15-99
/s/ Anthony L. Uremovich DESIGN STANDARDS ENGINEER	11-15-99 DATE
/s/ Firooz Zandi CHIEF HIGHWAY ENGINEER	11-15-99 DATE
ORIGINALLY APPROVED	9-01-98