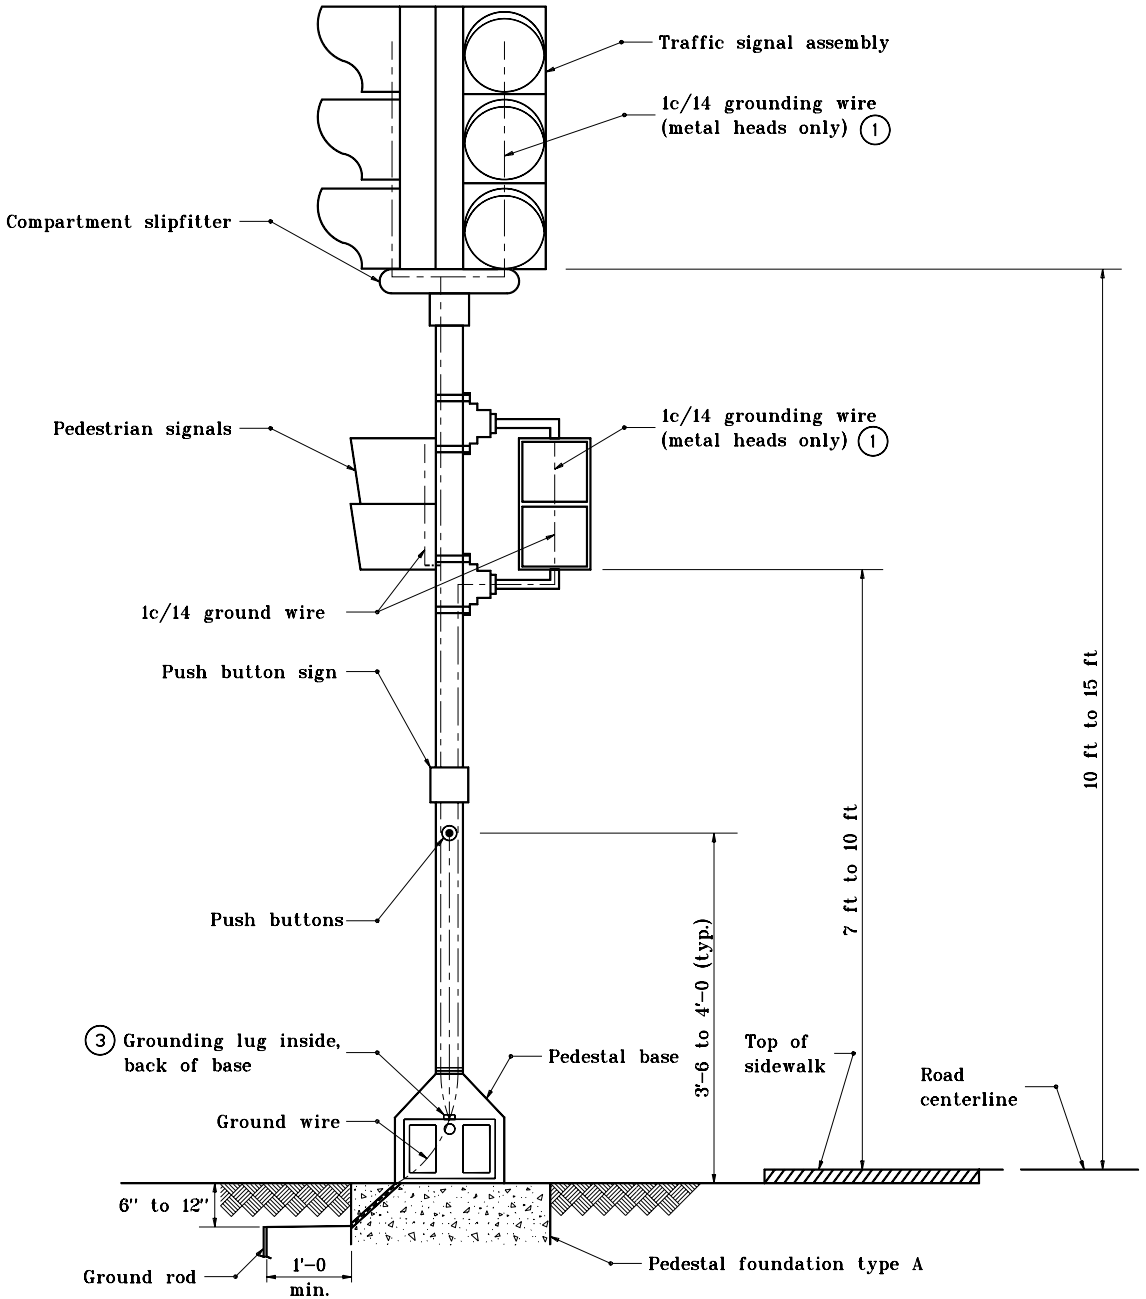


## GENERAL NOTES

1. On metal signal heads grounding wire shall connect each signal head and the bottom grounding bushing of the assembly to the grounding lug.

2. Single conductor (hookup) shall be used from slipfitter terminal block to signal indications.

3. See Standard Drawing E 805-SGGR-03 for grounding lug details.

INDIANA DEPARTMENT OF TRANSPORTATION

**PEDESTAL MOUNTED SIGNAL INDICATIONS**

SEPTEMBER 1998

STANDARD DRAWING NO. **E 805-SGCO-05**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

| | |
|---|---|
| DETAILS PLACED IN THIS FORMAT | 11-15-99 |
| /s/ Anthony L. Uremovich<br>DESIGN STANDARDS ENGINEER | 11-15-99<br>DATE |
| /s/ Firooz Zandi<br>CHIEF HIGHWAY ENGINEER | 11-15-99<br>DATE |
| ORIGINALLY APPROVED | 9-01-98 |