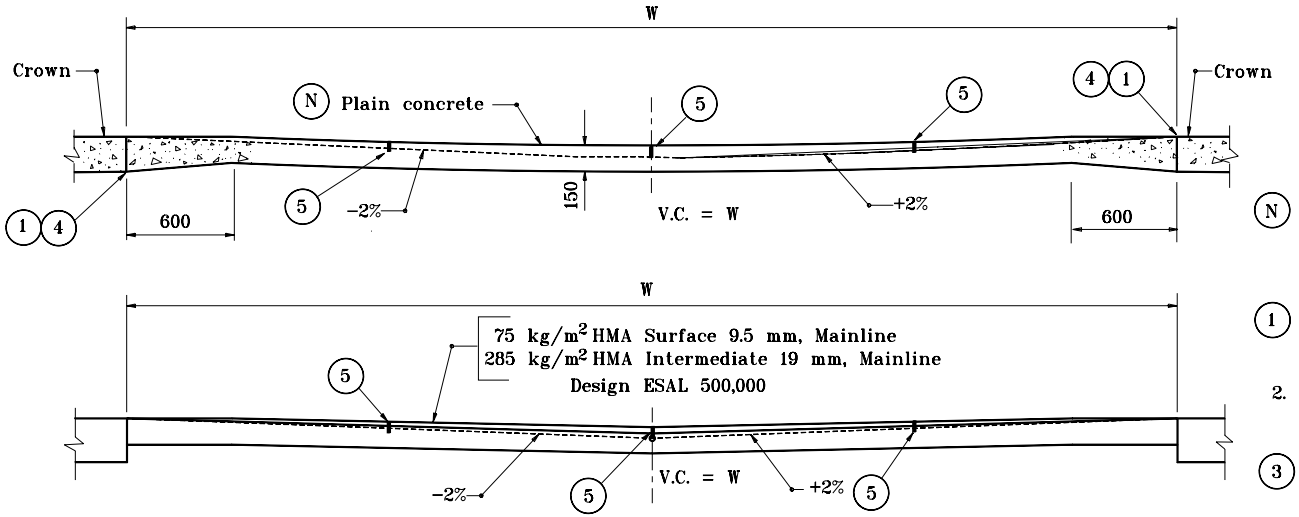

SECTION A–A
TO BE USED WITH CROWN PAVEMENTS.

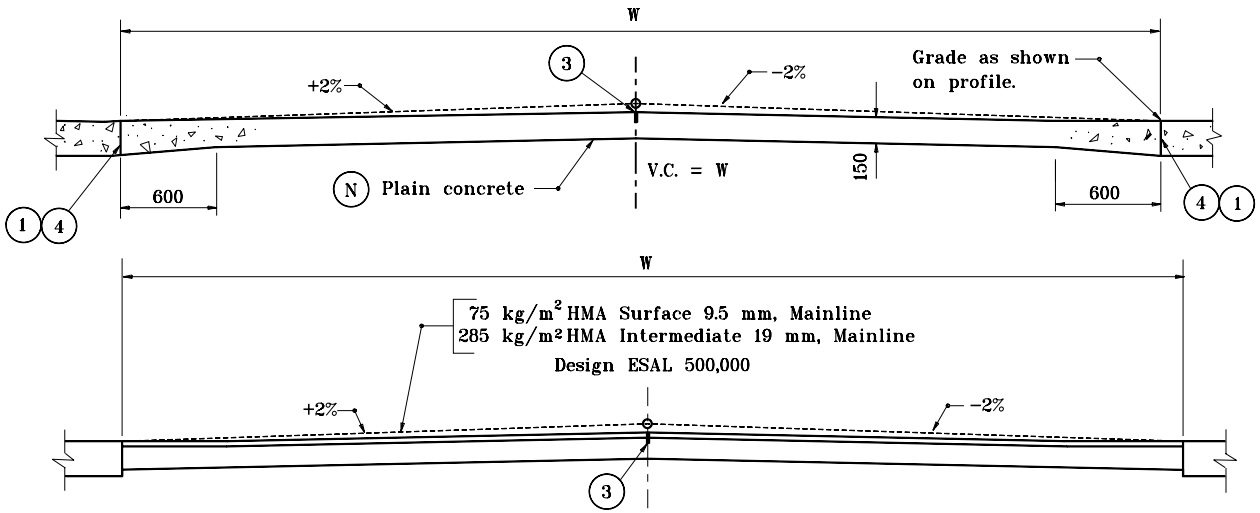

SECTION B–B
TO BE USED WITH 76 mm TILTED PAVEMENTS

NOTES :

(N) Private drive crossover shall be constructed of a flexible pavement unless otherwise directed by the Engineer.

(1) Thickened edge to the mainline thickness or 200 mm min. for plain concrete crossovers.

2. For location of cross sections see Standard Drawing 610–DRIV–17.

(3) Contraction joint type D–1, see Standard Drawing 501–CCPJ–06 for details.

(4) Keyway construction joint, see Standard Drawing 610–DRIV–16 for details.

(5) 25 mm preformed joint filler

All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION

PRIVATE DRIVE CROSSOVERS CROSS SECTIONS

JANUARY 2000

STANDARD DRAWING NO. **610–DRIV–18**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

/s/ Anthony L. Uremovich — DESIGN STANDARDS ENGINEER — 1–03–00 DATE

/s/ Firooz Zandi — CHIEF HIGHWAY ENGINEER — 1–03–00 DATE