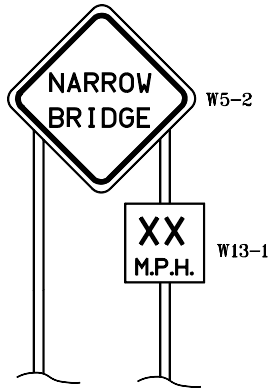

SIGNAGE REQUIRED AT NARROW BRIDGE ON TWO LANE ROADWAY

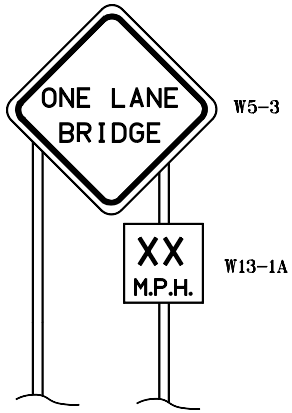

SIGNAGE REQUIRED AT ONE LANE BRIDGE ON TWO LANE ROADWAY



D-3 delineator post with three 3 in. dia. white delineators



D-1 delineator post with one 3 in. dia. white delineator

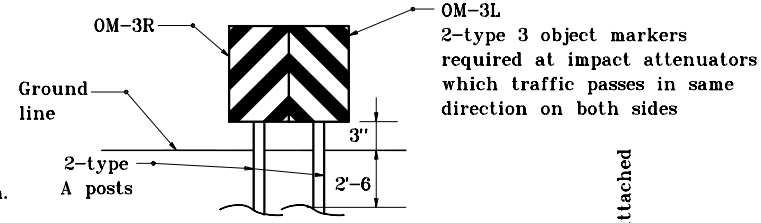

Impact Attenuator

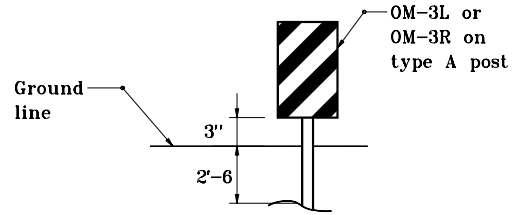

Type I G.R.E.T.

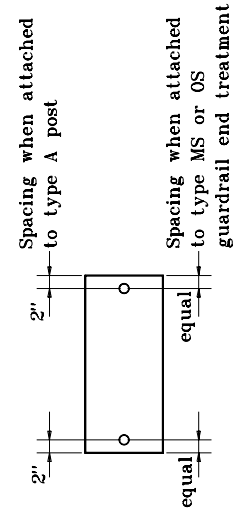

BOLT SPACING

TYPE 3 OBJECT MARKERS PLACEMENT AT GUARDRAIL END TREATMENTS AND IMPACT ATTENUATORS

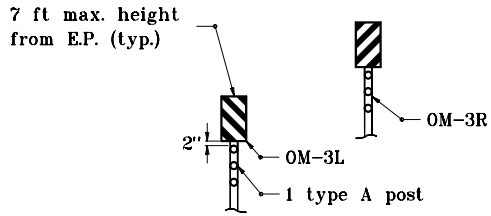

Type 3 object marker (R or L) with 3 white delineators shall be installed on 5 in. centers and be in line with the inner edge of the obstruction.

TYPE 3 OBJECT MARKER PLACEMENT AT ONE-LANE OR NARROW BRIDGE ON TWO LANE ROADWAY

INDIANA DEPARTMENT OF TRANSPORTATION

PLACEMENT OF TRAFFIC CONTROL DEVICES

SEPTEMBER 1999

STANDARD DRAWING NO **E 808-MKNB-03**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

DETAILS PLACED IN THIS FORMAT	7-27-99
/s/ Anthony L. Uremovich DESIGN STANDARDS ENGINEER	7-27-99 DATE
/s/ Firooz Zandi CHIEF HIGHWAY ENGINEER	7-27-99 DATE
ORIGIANLLY APPROVED	9-01-99