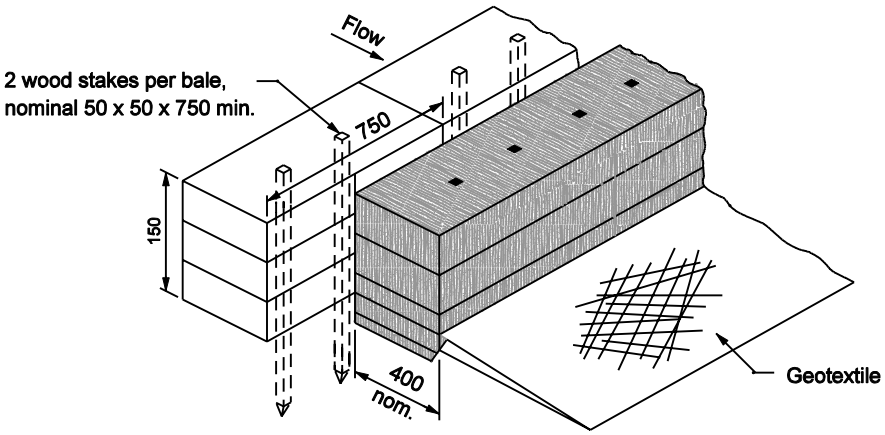

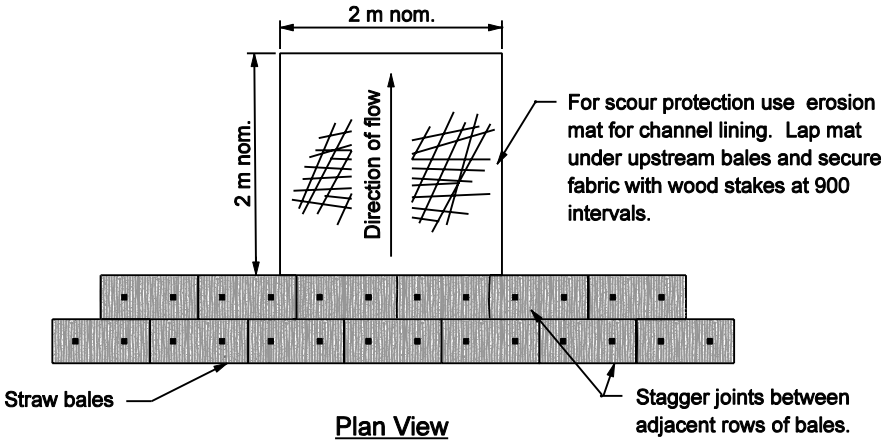

Plan View

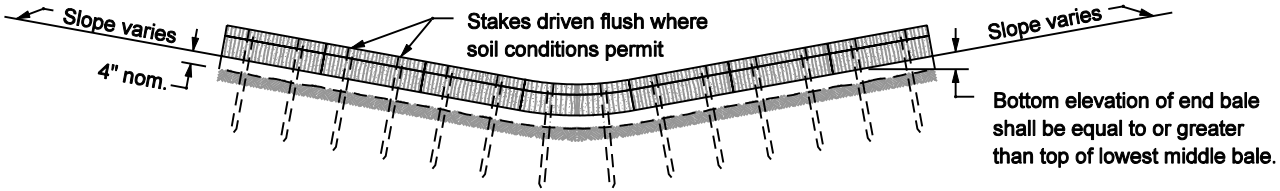

Front Elevation

GENERAL NOTES

1. Ditch checks shall be spaced such that the top of the downstream check is at the same elevation as the toe of the adjacent upstream check.
2. Either bale placement pattern shown may be used as directed. In both cases, the bales shall be staggered.

All Dimension are in mm unless otherwise specfied

INDIANA DEPARTMENT OF TRANSPORTATION

TEMPORARY CHECK DAM, STRAW BALES

MARCH 2003

STANDARD DRAWING NO. 205-TECD-02

RICHARD L. VanCLEAVE REGISTERED No. 9750 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 3-03-03
DESIGN STANDARDS ENGINEER DATE

/s/ Richard Smutzer 3-03-03
CHIEF HIGHWAY ENGINEER DATE