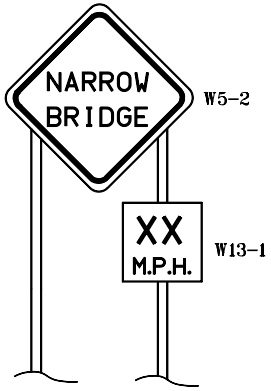

SIGNAGE REQUIRED AT NARROW BRIDGE ON TWO LANE ROADWAY

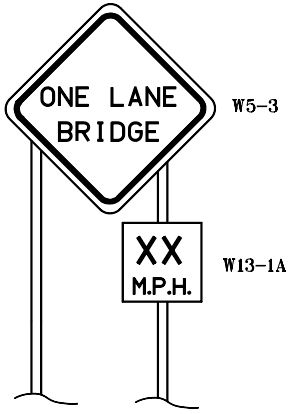

SIGNAGE REQUIRED AT ONE LANE BRIDGE ON TWO LANE ROADWAY



D-3 delineator post with 3 - 75 dia. white delineators



D-1 delineator post with 1 - 75 dia. white delineator

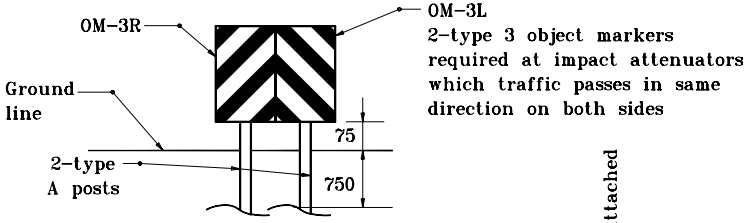

Impact Attenuator

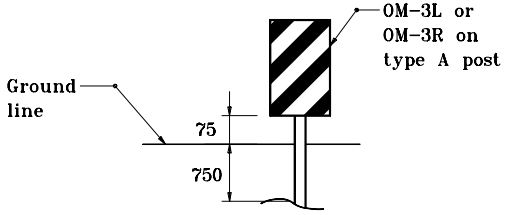

Type I G.R.E.T.

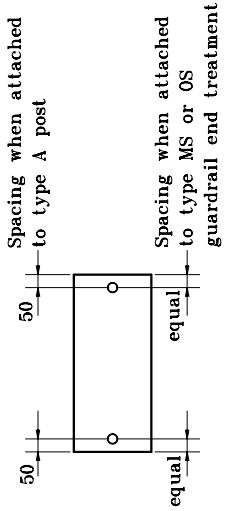

BOLT SPACING

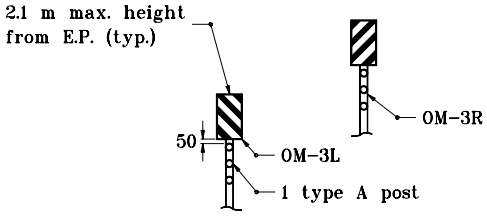

Type 3 object marker (R or L) with 3 white delineators shall be installed on 125 centers and be in line with the inner edge of the obstruction.

TYPE 3 OBJECT MARKER PLACEMENT AT ONE-LANE OR NARROW BRIDGE ON TWO LANE ROADWAY

TYPE 3 OBJECT MARKERS PLACEMENT AT GUARDRAIL END TREATMENTS AND IMPACT ATTENUATORS

All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION

PLACEMENT OF TRAFFIC CONTROL DEVICES

SEPTEMBER 1999

STANDARD DRAWING NO. **808-MKNB-03**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

/s/ Anthony L. Uremovich 9-01-99
DESIGN STANDARDS ENGINEER DATE

/s/ Donald W. Lucas 9-01-99
CHIEF HIGHWAY ENGINEER DATE

Source Sheet: MT5