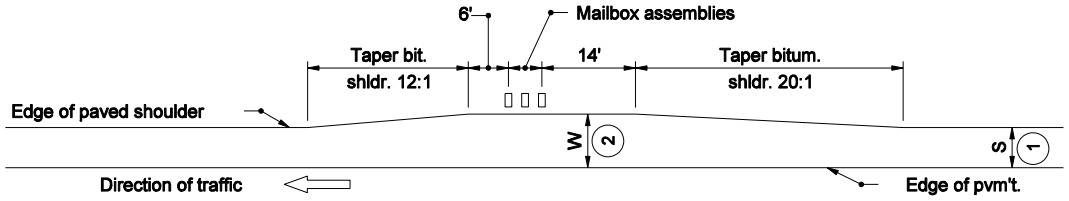

TYPICAL MAILBOX APPROACH

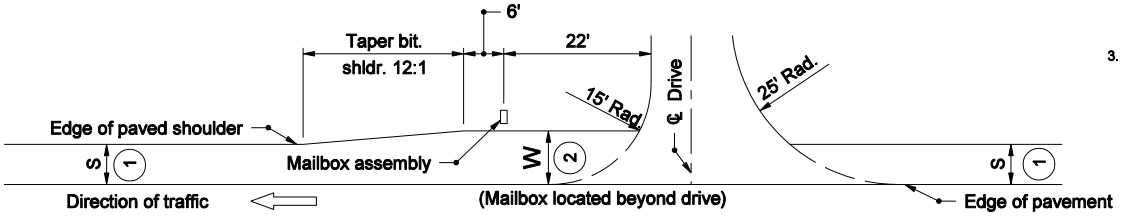

COMBINATION MAILBOX APPROACH & DRIVE

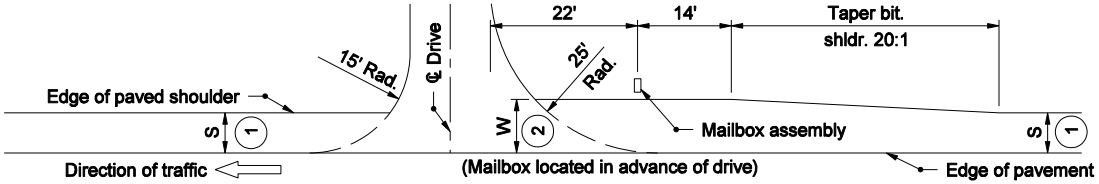

COMBINATION MAILBOX APPROACH & DRIVE

GENERAL NOTES

1. S = Normal width of bituminous shoulder as shown on plans.
2. W = Width of mailbox approach at mailbox.
   W = 12' preferred, 10' minimum greater than 5'. A.D.T. equal to or
   W = 10' preferred, 8' minimum for A.D.T. of 100 or greater, and less than 5'.
3. Mailbox approach pavement material shall be the same as the shoulder material.

INDIANA DEPARTMENT OF TRANSPORTATION

MAILBOX APPROACH PLAN VIEWS

SEPTEMBER 2004

STANDARD DRAWING NO. E 610-MBAP-01

RICHARD L. VanCLEAVE REGISTERED No. 9750 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

/s/ Richard L. VanCleave 9-01-04
DESIGN STANDARDS ENGINEER DATE

/s/ Richard K. Smutzer 9-01-04
CHIEF HIGHWAY ENGINEER DATE