


BEAM PROPERTIES

$A_B = 600,100 \text{ mm}^2$
 $I_B = 186,652 \times 10^6 \text{ mm}^4$
 $S_{TB} = 266,077 \times 10^3 \text{ mm}^3$
 $S_{BB} = 226,932 \times 10^3 \text{ mm}^3$
 $Y_{TB} = 701.5 \text{ mm}$
 $Y_{BB} = 822.5 \text{ mm}$
 $W_t = 14.16 \text{ kN/m}$

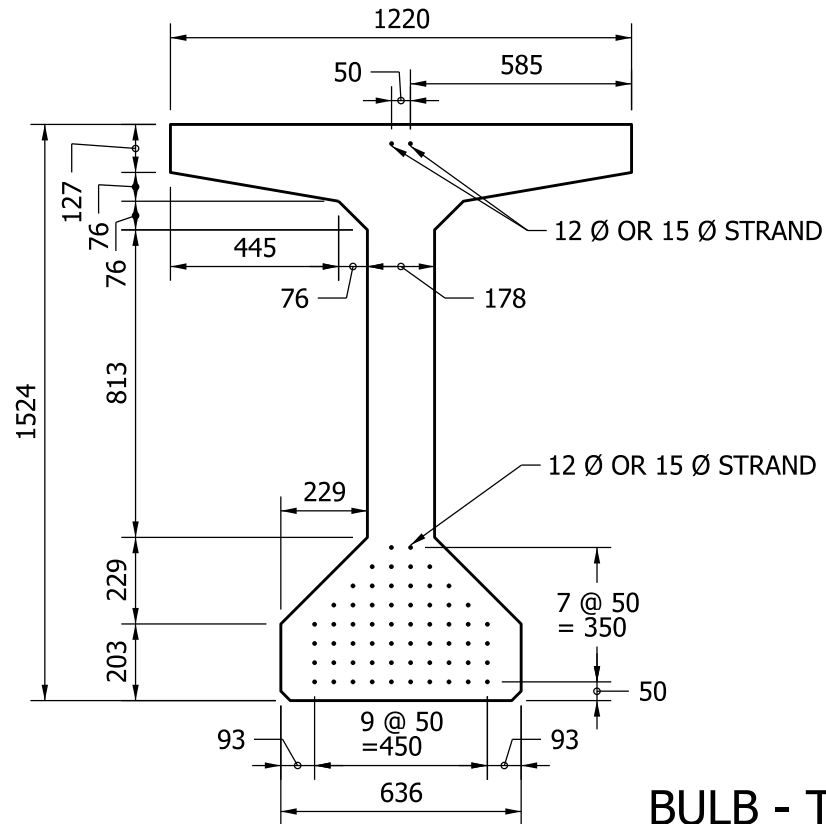

**BULB - TEE BEAM
TYPE BT 1524 x 1220**

Figure 63-14B(1)

NOTES:

1. BARS 1001 AND 1002 COMBINED TO FORM ONE STIRRUP.

2. *DENOTES EPOXY-COATED BARS

3. ALL DIMENSIONS ARE IN MILLIMETERS.

