


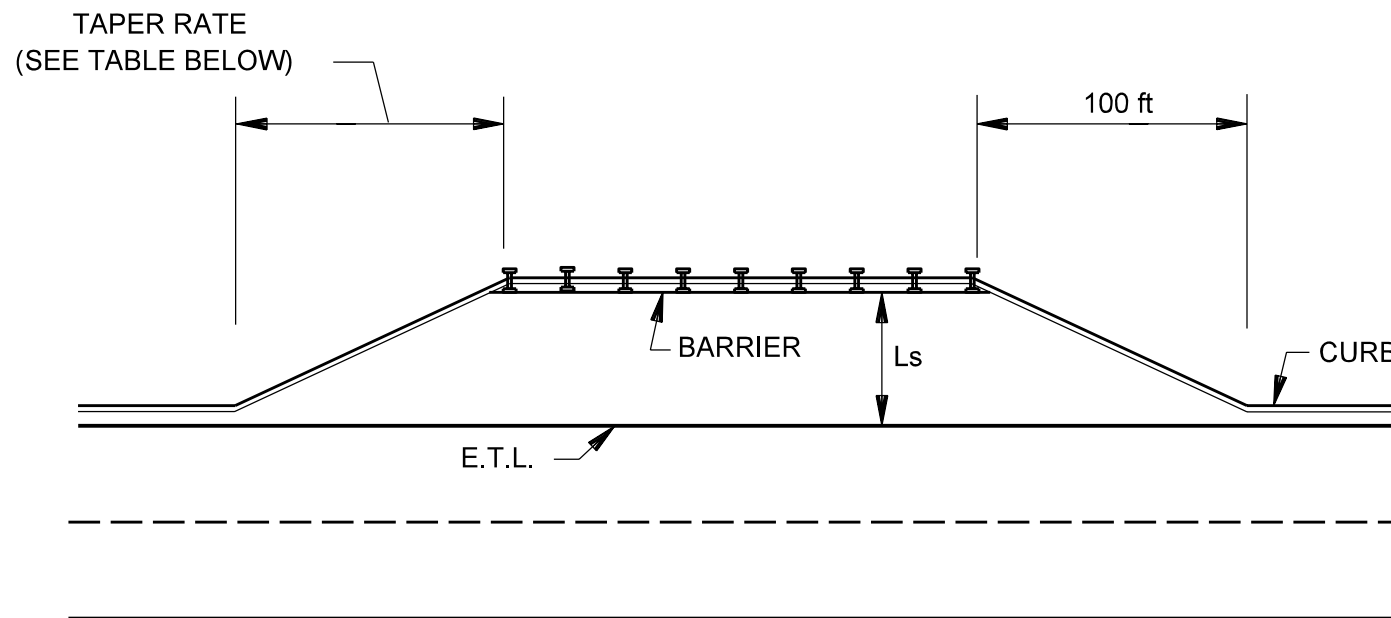

| DESIGN SPEED<br>(mph) | TAPER<br>RATE |
|-----------------------|---------------|
| 70                    | 70:1          |
| 60                    | 65:1          |
| 55                    | 60:1          |
| 50                    | 50:1          |
| 45                    | 45:1          |
| 40                    | 40:1          |

$L_s$  = SHY LINE OFFSET (m), SEE FIGURE 49-4E

## BARRIER PLACEMENT AT CURB

Figure 49-4B