



NOTES:

- ① Concrete pad shall be 6" thick with welded wire fabric 6" x 6", W3/W3 or equivalent. A clearance of 2" shall be provided between all sides and top of concrete pad and welded wire fabric.
- Appropriate impact attenuator Test Level shall be used to determine the concrete pad size and gravel barrel layout.
- See Standard Drawings E 601-GAIA-01, 01A and 02 for grading details.
- The details shown are for an impact attenuator type ED, gravel barrel array with a maximum obstruction width of 3'-0.

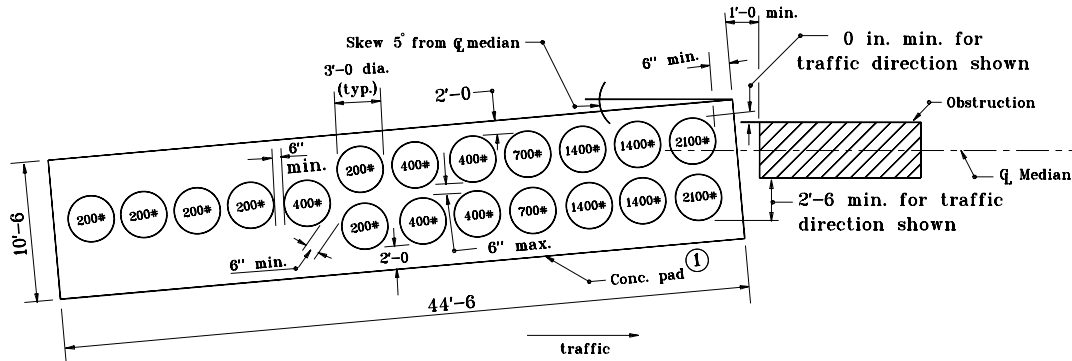

**CONCRETE PAD PLAN IMPACT ATTENUATOR TYPE ED
GRAVEL BARREL ARRAY FOR TEST LEVEL 3**

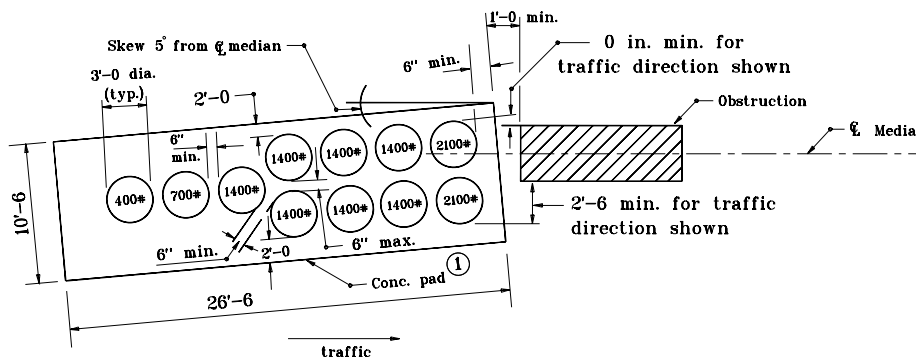

**CONCRETE PAD PLAN IMPACT ATTENUATOR TYPE ED
GRAVEL BARREL ARRAY FOR TEST LEVEL 2**

INDIANA DEPARTMENT OF TRANSPORTATION	
IMPACT ATTENUATOR ED LAYOUT	
MARCH 2002	
STANDARD DRAWING NO. E 601-IAED-01	
	/s/ Richard L. VanCleave 3-01-02 DESIGN STANDARDS ENGINEER DATE
	/s/ Richard K. Smutzer 3-01-02 CHIEF HIGHWAY ENGINEER DATE
DESIGN STANDARDS ENGINEER	