



GENERAL NOTES

1. This drawing shall be used where W-beam guardrail is specified along a two-lane two-way roadway to shield the piers of overhead structures.
2. The details on this drawing are typical guardrail layouts for shielding the piers of a single overhead structure. The required length of guardrail shall be determined in accordance with Tables RPPG-1 and RPPG-2, and shall be as shown on the plans.
3. Dimensions and details not shown on this drawing shall be as shown on the plans.
4. See Standard Drawing E 601-RPPG-03 for tables RPPG-1 and RPPG-2.

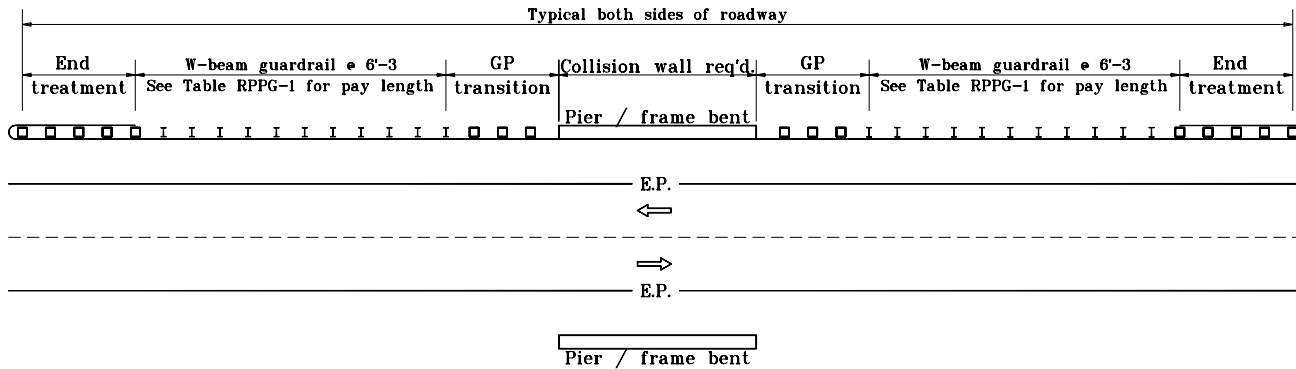

TWO-LANE TWO-WAY WITH SINGLE OVERHEAD STRUCTURE AND PIER TO E.P. ≤ 16'-0

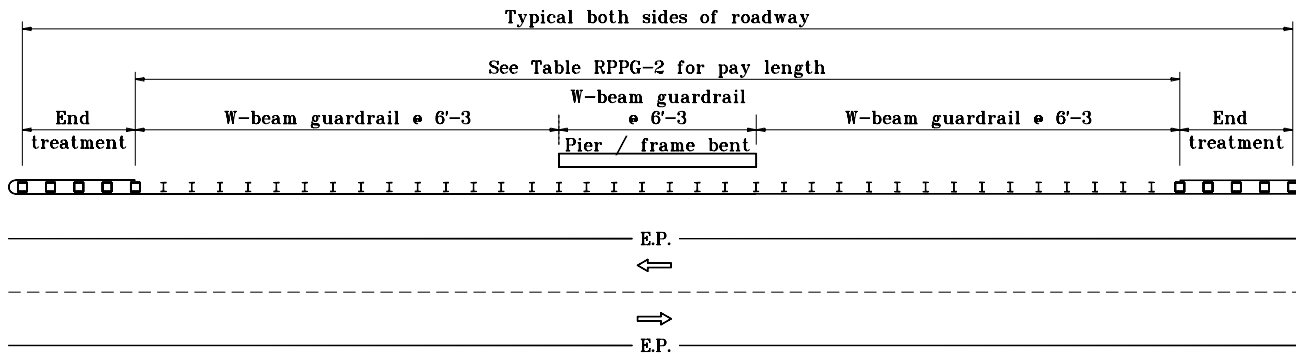

TWO-LANE TWO-WAY WITH SINGLE OVERHEAD STRUCTURE AND PIER TO E.P. > 16'-0

INDIANA DEPARTMENT OF TRANSPORTATION	
ROADSIDE PIER PROTECTION GUARDRAIL	
APRIL 1995	
STANDARD DRAWING NO. E 601-RPPG-04	
	DETAILS PLACED IN THIS FORMAT 11-15-99
	/s/ Anthony L. Uremovich 11-15-99 DESIGN STANDARDS ENGINEER DATE
	/s/ Firooz Zandi 11-15-99 CHIEF HIGHWAY ENGINEER DATE
DESIGN STANDARDS ENGINEER	ORIGINALLY APPROVED 4-03-95