


**GENERAL NOTES :**

- ① Shoulder cross slope in superelevated section shall be as follows:  
 Where the high side is on the outside of the curve:  
 4% ↘ for horizontal curve radius  $R \geq 3820$  ft  
 2% ↘ for  $2870 \text{ ft} \leq R \leq 3820$  ft  
 Where the high side of the superelevated pavement is on the median side of the curve; maintain adjacent travel lane's superelevation transition rate or superelevation rate.  
 The low side of a superelevated pavement shall maintain the adjacent travel lane's superelevation transition rate or superelevation rate.
- ② See Standard Drawing 801-TCDV-01 for channelizing device.

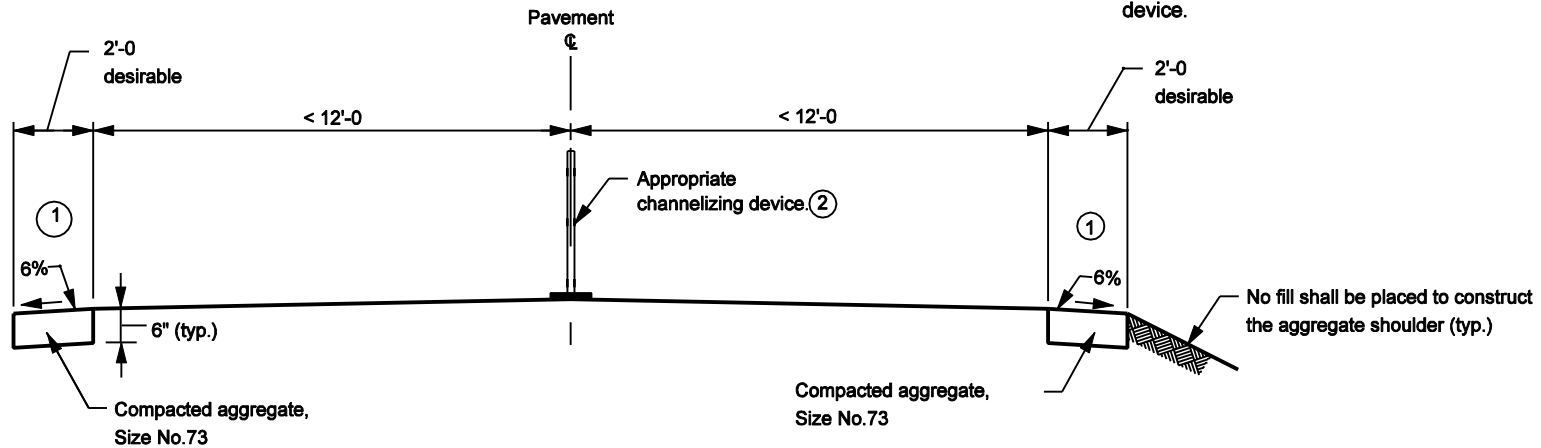

INDIANA DEPARTMENT OF TRANSPORTATION	
<b>TEMPORARY SHOULDER FOR TRAFFIC MAINTENANCE</b>	
SEPTEMBER 2002	
STANDARD DRAWING NO. E 801-TCTS-01	
	/s/ Richard L. VanCleave      9-03-02 DESIGN STANDARDS ENGINEER      DATE
	/s/ Richard K. Smutzer      9-03-02 CHIEF HIGHWAY ENGINEER      DATE
DESIGN STANDARDS ENGINEER	