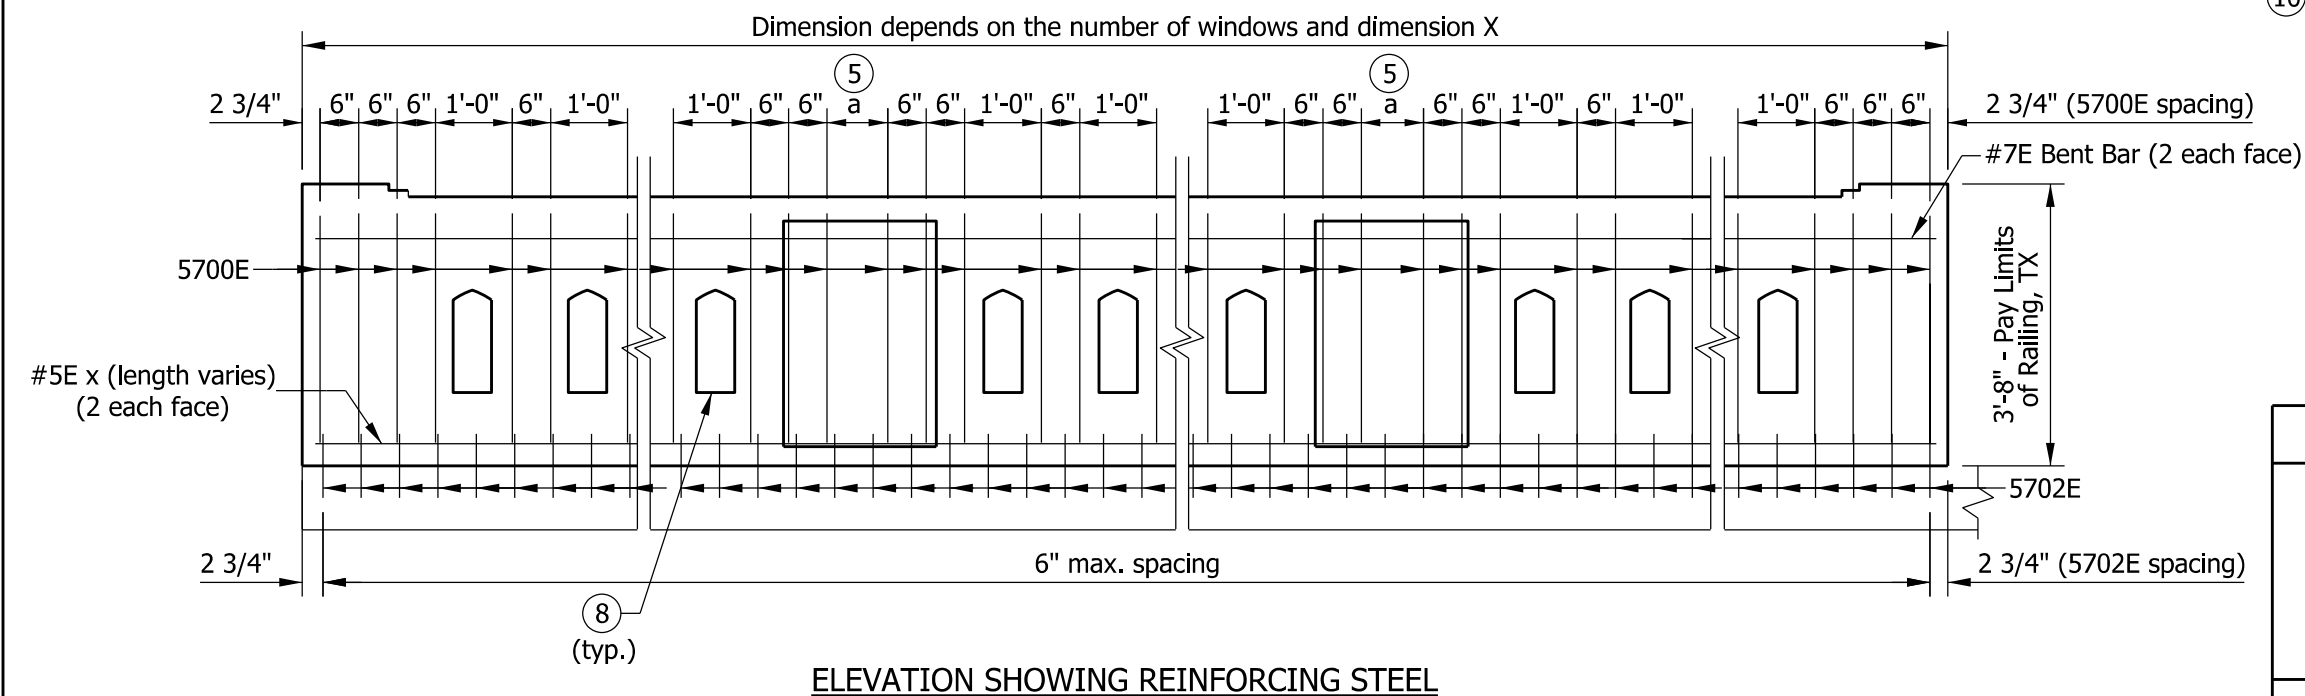
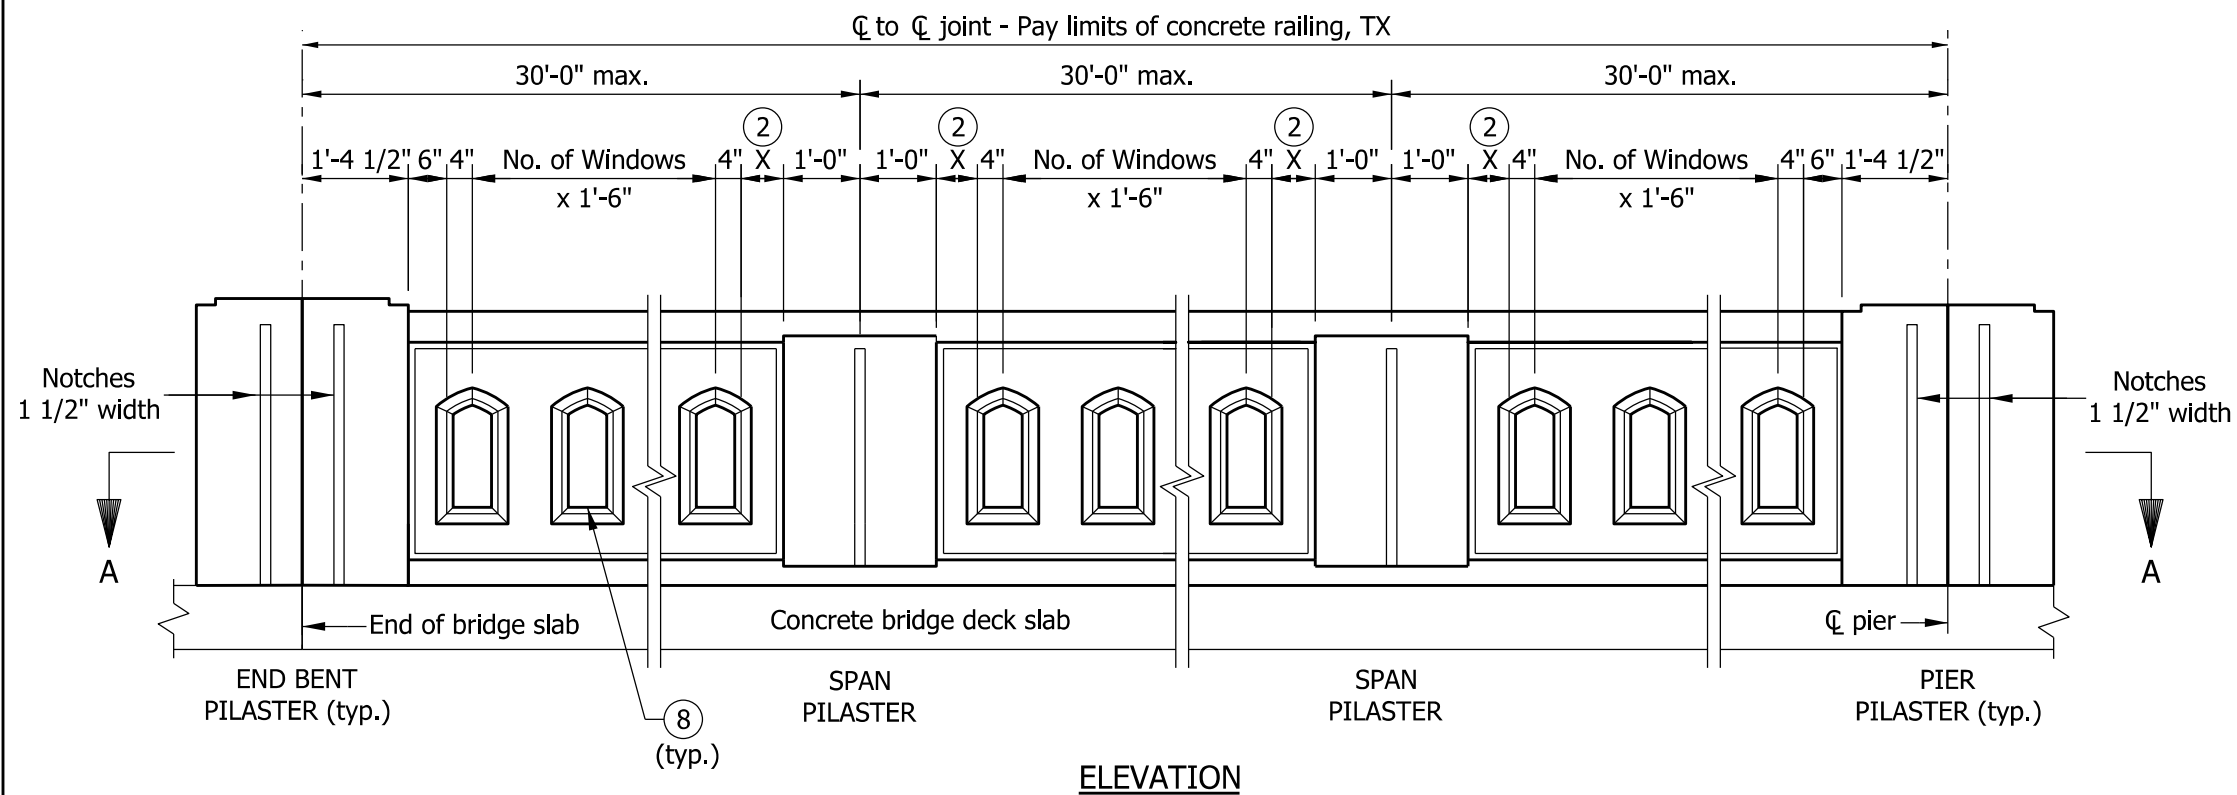


NOTES


- See Standard Drawing E 706-BRTX-02, -03, and -04 for sections.
- Select the number of windows and adjust dimension X to fit the span length.
- Span pilasters may be omitted for a short span with $X \leq 2'-0"$.
- Span pilasters are for aesthetic purposes only. Omitting span pilasters does not decrease the integrity of the railing.
- Dimension $a = 2X + 3 \frac{1}{2}"$. Space bars within dimension a equally $\leq 6"$.
- See Standard Drawing E 706-TTXX-01 for Concrete Bridge Railing Transition, TTXX.
- All reinforcing bars designated E shall be epoxy coated.
- Window opening. See Standard Drawing E 706-BRTX-02 for details.
- See Standard Drawing E 706-BRTX-03 for span pilaster details.
- See Standard Drawing E 706-BRTX-04 for pier and end bent pilaster details.

INDIANA DEPARTMENT OF TRANSPORTATION

RAILING, TX
TYPICAL PANEL

SEPTEMBER 2012

STANDARD DRAWING NO. E 706-BRTX-01



/s/ Richard L. VanCleave 09/04/12

SUPERVISOR, ROADWAY STANDARDS DATE

/s/ Mark A. Miller 09/04/12

CHIEF ENGINEER DATE