














## 708.04 Perforated Riser Outlet (Dewatering Device)

Exhibit 708.04-F

### TEMPORARY PERFORATED RISER OPTIONAL SEDIMENT BASIN DEWATERING DEVICE TYPICAL PRACTICE DIAGRAM (NOT TO SCALE)

1 foot of INDOT CA No. 8 aggregate  
over perforations (minimum)

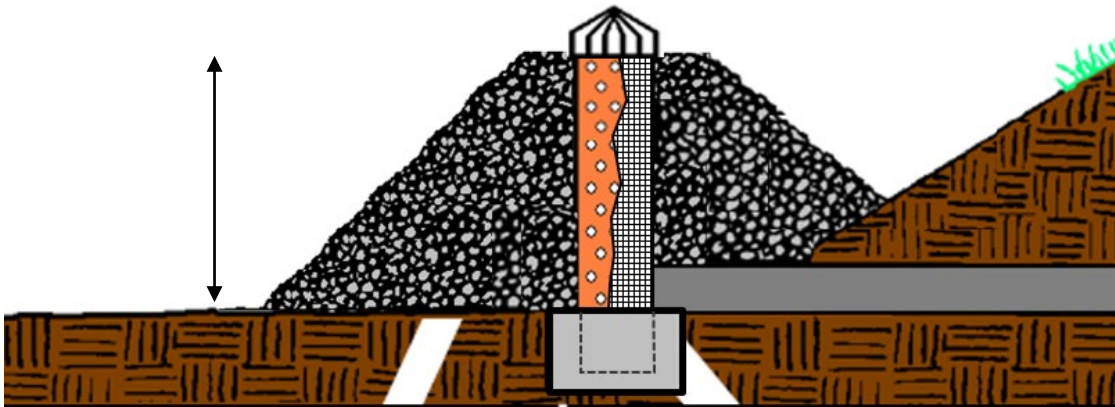

#### NOTES:

- For dimensions and construction information see the “Specifications” section of this practice and the practice Design Data Sheet
- Replace perforated riser with Floating Outlet (708.03) when weather conditions are appropriate.
- The illustrations in this exhibit are not intended to serve as construction drawings. The diagrams are to be used to communicate the concepts for implementation of this control measure.

Source: IDEM file