


PLAN VIEW
(PAVED SHOULDER 2.4 m OR GREATER IN WIDTH)

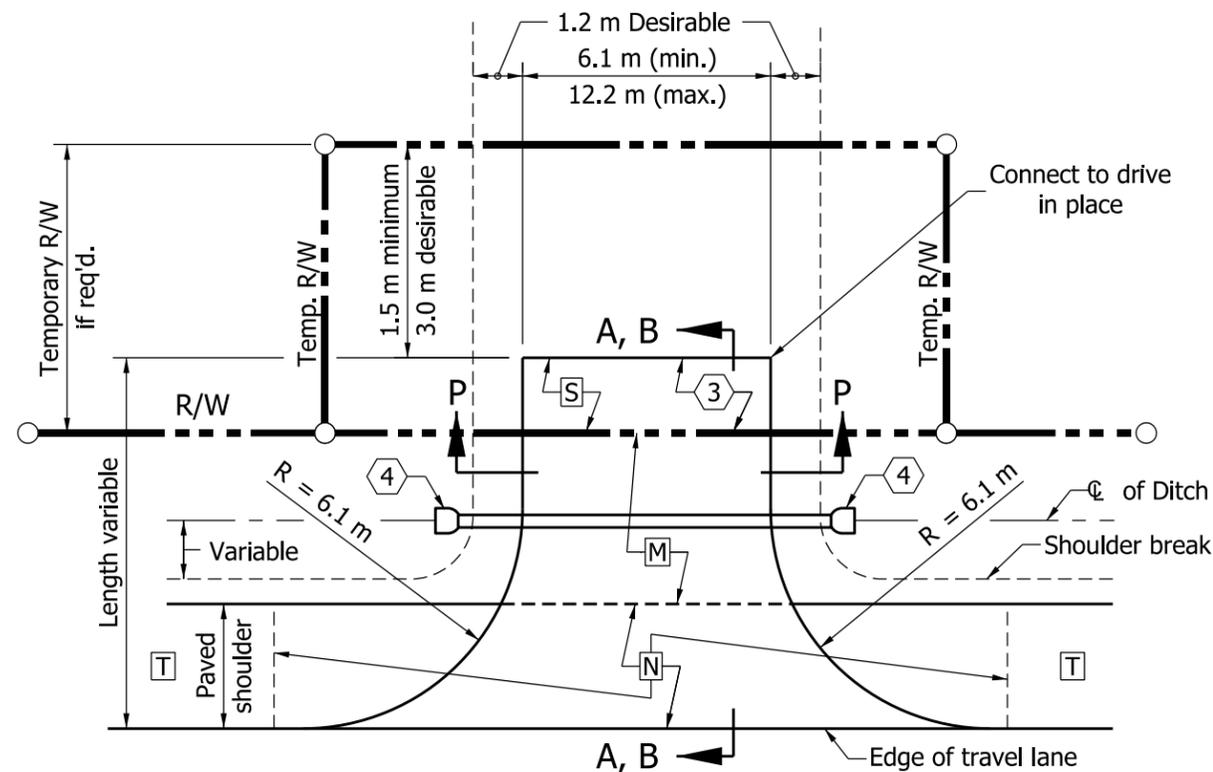

PLAN VIEW
(PAVED SHOULDER LESS THAN 2.4 m IN WIDTH OR UNPAVED SHOULDER)

NOTES:

1. See Standard Drawing 610-DRIV-13 for General Notes and additional Legend.
2. See Standard Drawing 610-DRIV-10 for Sections A-A, B-B and C-C.
3. See Standard Drawing 610-DRIV-09 for Section P-P.

LEGEND

- M** HMA for Approaches:
90 kg/m² HMA Surface Type B on
150 kg/m² HMA Intermediate Type B on
480 kg/m² HMA base, Type B on
subgrade treatment Type IIIA
or
PCCP for Approaches, 225 mm, on
subgrade treatment Type IIIA
- N** The greater thickness of either the drive **M**
or the paved shoulder **T** section.
- T** Plan shoulder section.
- S** For type and thickness equivalent to
surface in place, see plans.

All Dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION	
CLASS IV DRIVE	
SEPTEMBER 2010	
STANDARD DRAWING NO. 610-DRIV-04	
	<i>/s/ Richard L. VanCleave</i> 09/01/10 DESIGN STANDARDS ENGINEER DATE
DESIGN STANDARDS ENGINEER	<i>/s/ Mark A. Miller</i> 09/01/10 CHIEF HIGHWAY ENGINEER DATE