Upper Wabash River Watershed Management Plan ~Phase 2~

A project of the Upper Wabash River Basin Commission
FFY 2012 Section 205(j) Grant Project: A305-3-5
January 9, 2013 – April 8, 2015
Final version: June 2016

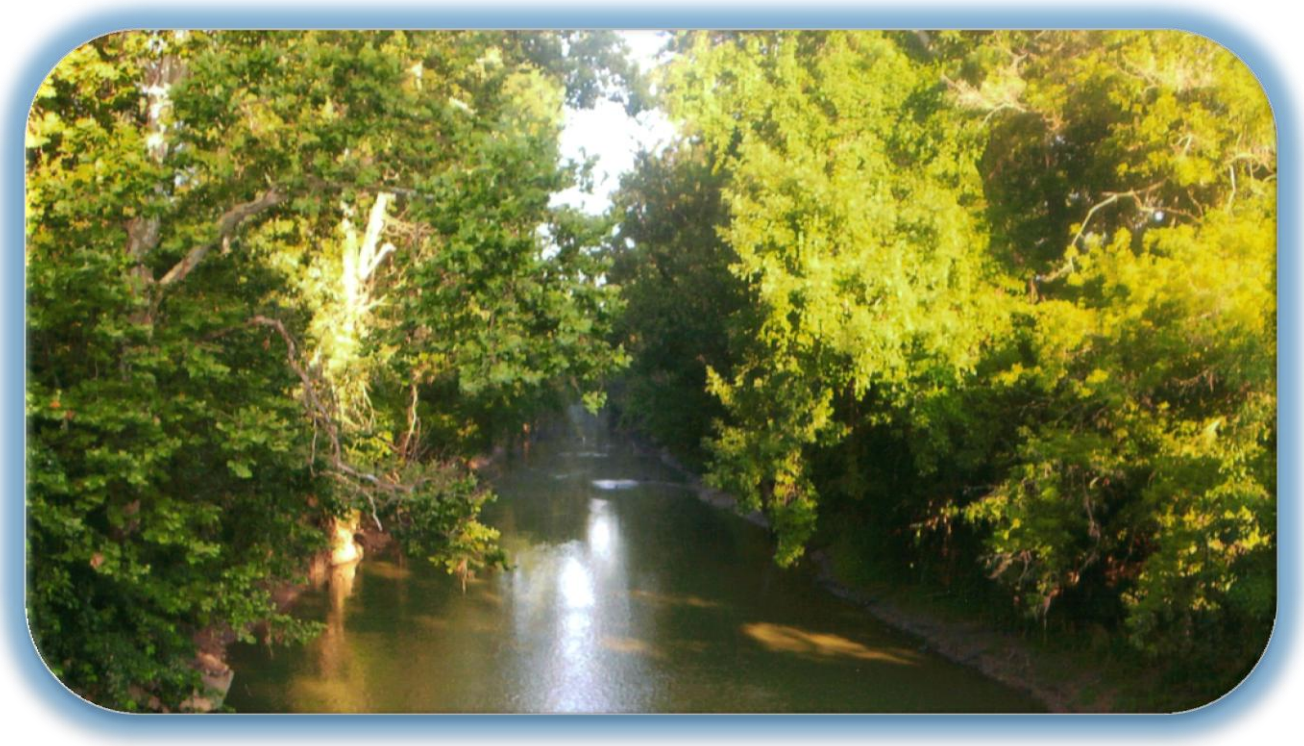

Upper Wabash River Basin Commission
117 W. Harvest Road
Bluffton, IN 46714
Phone: 260/824-0624 ext. 3
www.uwrbc.org

This plan is a result of a two-year planning effort to identify causes of water quality impairments, identify potential sources of pollutants, and develop strategies to improve water quality in the "Phase 2" portion of the Upper Wabash River basin watershed. Public agencies, private organizations, and stakeholder citizens were involved as part of this planning process. This project has been funded wholly or in part by the United States Environmental Protection Agency under assistance agreement number C600E72012 to the Indiana Department of Environmental Management. The contents of this document do not necessarily reflect the views and policies of the Environmental Protection Agency, or Indiana Department of Environmental Management, nor does mention of trade names or commercial products constitute endorsement or recommendation for use.

Watershed Management Plan meets IDEM's 2009 Checklist.
IDEM approval received September 29, 2015

Final version June 21, 2016
Received US EPA approval August 17, 2016.

DISCLAIMER: Exhibits and any GIS data used within this report are not intended to be used as legal documents or references. They are intended to serve as an aid in graphic representation only. Information shown on exhibits is not warranted for accuracy or merchantability.

Table of Contents

1.0 Community Watershed Initiative ***1***

1.1 Community Leadership 5

1.2 Steering Committee & Stakeholder Involvement 6

1.3 Stakeholder Concerns 7

2.0 Watershed Inventory ***9***

2.1 Geology and Topography 9

2.2 Hydrology (Drainage Patterns) 9

2.3 Soils 16

2.4 Land Use 30

2.5 Rare, Threatened and Endangered Plants and Animals 49

2.6 Local Planning Efforts 51

2.7 Watershed Summary 65

3.0 Environmental and Water Quality Data ***66***

3.1 Historical Water Quality Information 66

3.2 Habitat and Biological Information 71

3.3 Watershed Surveys 71

3.4 Project Water Quality Monitoring, Targets and Data 75

4.0 Watershed Inventory-Part II ***98***

4.1 Subwatersheds of Rock Creek Watershed 98

4.1.1 Headwaters-Rock Creek HUC: 051201010701 98

4.1.2 Mossburg Ditch-Rock Creek HUC: 051201010702 101

4.1.3 Stites Ditch-Rock Creek HUC: 051201010703 104

4.1.4 Elkenberry Ditch-Rock Creek HUC: 051201010704 107

4.1.5 Rock Creek 10-digit HUC (HUC:0512010107) Watershed Summary 111

4.2 Subwatersheds of the Wabash River-Griffin Ditch Watershed 114

4.2.1 Johns Creek-Wabash River HUC: 051201010801 114

4.2.2 Dowty Ditch-Wabash River HUC: 051201010802 117

4.2.3 Bender Ditch-Wabash River HUC: 051201010803 120

4.2.4 Griffin Ditch-Wabash River HUC: 051201010804.....123

4.2.5 Griffin Ditch-Wabash River 10-digit HUC (HUC: 0512010108) Watershed Summary.....126

4.3 Subwatersheds of the Eight Mile Creek Watershed 129

4.3.1 Maple Creek-Eight Mile Creek HUC: 051201010901 129

4.3.2 Moser Lake-Eight Mile Creek HUC: 051201010902.....132

4.3.3 Big Creek-Eight Mile Creek HUC: 051201010903.....136

4.3.4 Pleasant Run Ditch-Eight Mile Creek HUC: 051201010904 138

4.3.5 Eight Mile Creek 10-digit HUC (HUC:0512010109) Watershed Summary.....141

5.0 Review of Watershed Problems and Causes 145

5.1 Summary of Watershed Inventory.....145

5.2 Analysis of Stakeholder Concerns.....152

5.3 Identified Problems.....154

5.4 Potential Causes for Water Quality Impairments 156

6.0 Identifying Sources of Pollution.....157

6.1 Problems, Potential Causes, and Potential Sources 157

6.2 Pollutant Load Estimates 161

6.3 Target Load Reductions Needed.....175

7.0 Water Quality Improvement Goals.....183

7.1 Water Quality Goals and Indicators.....183

7.2 Critical Land Areas 188

7.3 Summary of Critical Land Areas 199

8.0 Implementation Strategies 201

8.1 Objectives to Reach Goals 201

8.2 Best Management Practices and Estimated Load Reductions 201

8.3 Action Register and Schedule 208

9.0 Project Tracking and Future Activities 221

9.1 Evaluating Effectiveness of Project 221

9.2 Future Watershed Activities 221

Appendices

APPENDIX A: Acronym Key 223
APPENDIX B: Education and Outreach Meetings and Events 225
APPENDIX C: Social Indicator Surveys 236
APPENDIX D: Other Reports 263
APPENDIX E: Endangered, Threatened and Rare Species Lists by County 264
APPENDIX F: Water Quality Monitoring Site Photos 269
APPENDIX G: Upper Wabash River Phase 2 Project Water Quality Monitoring Data 277
APPENDIX H: Load Duration Curves and Target Concentration Charts 358
APPENDIX I: Best Management Practice Descriptions 383
APPENDIX J: Action Register and Schedule 397

Figures

Figure 1: Upper Wabash River Basin Watershed, HUC 08120101 1
Figure 2: Upper Wabash River Basin Commission Project Watersheds 2
Figure 3: UWRBC Phase 2 Project Area 3
Figure 4: Hydrology of Rock Creek, HUC 0512010107 11
Figure 5: Hydrology of Griffin Ditch-Wabash River, HUC 0512010108 12
Figure 6: Hydrology of Eight Mile Creek, HUC 0512010109 13
Figure 7: Upper Wabash River-Phase 2 Watershed Impaired Streams 15
Figure 8: Soil Associations in the UWRBC Phase 2 Watershed 17
Figure 9: Highly Erodible Soils of Rock Creek, HUC 0512010107 19
Figure 10: Highly Erodible Soils of Griffin Ditch-Wabash River, HUC 05112010108 20
Figure 11: Highly Erodible Soils of Eight Mile Creek, HUC 0512010109 21
Figure 12: Hydric Soils of Rock Creek, HUC 0512010107 23
Figure 13: Hydric Soils of Griffin Ditch-Wabash River, HUC 0512010108 24
Figure 14: Hydric Soils of Eight Mile Creek, HUC 0512010109 25
Figure 15: Septic System Suitability of Rock Creek, HUC 0512010107 27
Figure 16: Septic System Suitability of Griffin Ditch-Wabash River, HUC 0512010108 28
Figure 17: Septic System Suitability of Eight Mile Creek, HUC 0512010109 29

Figure 18: Land Use of Rock Creek, HUC 0512010107 32
Figure 19: Land Use of Griffin Ditch-Wabash River, HUC 0512010108 33
Figure 20: Land Use of Eight Mile Creek, HUC 0512010109 34
Figure 21: Prime Farmland of Rock Creek, HUC 0512010107 36
Figure 22: Prime Farmland of Griffin Ditch-Wabash River, HUC 0512010108 37
Figure 23: Prime Farmland of Eight Mile Creek, HUC 0512010109 38
Figure 24: CFOs & Hobby Farms of Rock Creek, HUC 0512010107 39
Figure 25: CFOs & Hobby Farms of Griffin Ditch-Wabash River, HUC 0512010108 40
Figure 26: CFOs & Hobby Farms of Eight Mile Creek, HUC 0512010109 41
Figure 27: NPDES Facilities of Rock Creek, HUC 0512010107 45
Figure 28: NPDES Facilities of Griffin Ditch-Wabash River, HUC 0512010108 46
Figure 29: NPDES Facilities of Eight Mile Creek, HUC 0512010109 47
Figure 30: LARE Watershed Diagnostic Study Map 61
Figure 31: UWRBC Phase 1 Project Area 62
Figure 32: Other Reports Project Areas 64
Figure 33: IDEM Water Quality Monitoring Locations 67
Figure 34: LARE Diagnostic Study-Water Quality Monitoring Locations in Griffin and Flemming Ditches, and Somers Creek Watersheds – Sites 6-9 69
Figure 35: Rock Creek Conservancy District Water Quality Monitoring Locations 70
Figure 36: Upper Wabash River Phase 2 Project Water Quality Monitoring Locations 77
Figure 37: Upper Wabash River Phase 2 Project - WQM Locations Map Inset Sites 9-12 78
Figure 38: Temperature Monitoring Data Chart 85
Figure 39: Dissolved Oxygen Monitoring Data Chart 86
Figure 40: Dissolved Oxygen - % Saturation Monitoring Data Chart 87
Figure 41: pH Monitoring Data Chart 88
Figure 42: Turbidity Monitoring Data Chart 89
Figure 43: Flow Monitoring Data Chart 90
Figure 44: *E. coli* Monitoring Data Chart 91
Figure 45: Nitrate – NO_3 Monitoring Data Chart 92
Figure 46: Nitrite – NO_2 Monitoring Data Chart 93
Figure 47: Total Nitrogen Monitoring Data Chart 94
Figure 48: Total Phosphorous Monitoring Data Chart 95
Figure 49: Biological Monitoring - Macroinvertebrate Sampling Monitoring Data Chart 96
Figure 50: Citizens Qualitative Habitat Evaluation Index Monitoring Data Chart 97
Figure 51: Headwaters-Rock Creek, HUC 051201010701 100
Figure 52: Mossburg Ditch-Rock Creek, HUC 051201010702 103
Figure 53: Stites Ditch-Rock Creek, HUC 051201010703 106
Figure 54: Elkenberry Ditch-Rock Creek, HUC 051201010704 110
Figure 55: Rock Creek (HUC 0512010107) Watershed 113
Figure 56: Johns Creek-Wabash River, HUC 051201010801 116
Figure 57: Dowty Ditch-Wabash River, HUC 051201010802 119
Figure 58: Bender Ditch-Wabash River, HUC 051201010803 122
Figure 59: Griffin Ditch-Wabash River, HUC 051201010804 125
Figure 60: Wabash River-Griffin Ditch (HUC: 0512010108) Watershed 128
Figure 61: Maple Creek-Eight Mile Creek, HUC 051201010901 131
Figure 62: Moser Lake-Eight Mile Creek, HUC 051201010902 135

Figure 63: Big Creek-Eight Mile Creek, HUC 051201010903 137
Figure 64: Pleasant Run Ditch-Eight Mile Creek, HUC 051201010904....140
Figure 65: Eight Mile Creek (HUC: 0512010108) Watershed 144
Figure 66: Water Quality Monitoring Exceedances – Rock Creek, HUC 0512010107 149
Figure 67: Water Quality Monitoring Exceedances – Griffin Ditch-Wabash River, HUC 0512010108 150
Figure 68: Water Quality Monitoring Exceedances – Eight Mile, HUC 0512010109 151
Figure 69: Critical Land Areas for Nutrients 190
Figure 70: Critical Land Areas for *E. coli* 192
Figure 71: Critical Land Areas for Sediment....194
Figure 72: Critical Land Areas for Habitat and Biology 196
Figure 73: Critical Land Areas for Flooding/Floodplain Management 198
Figure 74: Priority Critical Land Areas 200

Tables

Table 1-1: UWRBC Voting Members 5
Table 1-2: Steering Committee Members....7
Table 1-3: Stakeholder Concerns....8
Table 2-1: Waters of the Upper Wabash River Phase 2 Watershed 10
Table 2-2: Impaired Waters in the Upper Wabash River Phase 2 Watershed 14
Table 2-3: Hydric Soils in the Upper Wabash River Phase 2 Project Area....22
Table 2-4: Land Use by Subwatershed and Project Area 31
Table 2-5: Land Use by Groups....31
Table 2-6: NPDES Facilities....43
Table 2-7: Stakeholder Concerns by Land Use 48
Table 2-8: Endangered, Threatened and Rare Species list for Wells, Allen, and Huntington Counties 49
Table 2-9: Natural Resource Strategies from the Wells County Comprehensive Plan 52
Table 2-10: Natural Resource Strategies from the Huntington County Comprehensive Plan 55
Table 2-11: Natural Resource Strategies from the Allen County Comprehensive Plan....57
Table 3-1: Summary of Windshield Survey Observations 72
Table 3-2: UWRBC Phase 2 Water Quality Monitoring Locations 76
Table 3-3: Subwatershed Acres by Water Monitoring Sites 81
Table 3-4: Water Quality Parameters and Target Levels in the Upper Wabash River Phase 2 Project Watershed 84
Table 5-1: Stakeholder Concerns....152
Table 5-2: Problems identified for the Wabash River Watershed – Phase 2 project area based on stakeholder and inventory concerns 154
Table 5-3: Problems and potential causes of water quality impairments in the Upper Wabash River Phase 2 project area....156
Table 6-1: Problems, potential causes, and potential sources of water quality impairments in the Upper Wabash River Phase 2 project area....157
Table 6-2: Monitoring Sites Used for Load Estimates 162
Table 6-3: Measured Current Load and Target Load Estimates by Subwatershed (Pounds Per Year or Billions of Organisms Per Year 163

Table 6-4: Measured Current Load and Target Load Estimates for UWRBC Phase 2 Project Area (Pounds Per Year or Billions of Organisms Per Year) 164
Table 6-5: Measured Current Load and Target Load Estimates by Subwatershed (Pounds Per Acre Per Year or Billions of Organisms Per Acre Per Year) 165
Table 6-6: Measured Current Load and Target Load Estimates for UWRBC Phase 2 Project Area (Pounds Per Acre Per Year or Billions of Organisms Per Acre PerYear) 166
Table 6-7: LDC Modeled Load and Target Load Estimates by Subwatershed (Pounds Per Year) 167
Table 6-8: LDC Modeled Load and Target Load Estimates for the UWRBC Phase 2 Project Area (Pounds Per Year) 168
Table 6-9: LDC Modeled Load and Target Load Estimates by Subwatershed (Pounds Per Acre Per Year) 169
Table 6-10: LDC Modeled Load and Target Load Estimates for the UWRBC Phase 2 Project Area (Pounds Per Acre Per Year) 170
Table 6-11: Measured Loads vs. Modeled Loads - Nitrate 170
Table 6:12: Measured Loads vs. Modeled Loads for Nitrate for the UWRBC Phase 2 Project Area 171
Table 6-13: Measured Loads vs. Modeled Loads - Nitrite 171
Table 6:14: Measured Loads vs. Modeled Loads for Nitrite for the UWRBC Phase 2 Project Area 172
Table 6-15: Measured Loads vs. Modeled Loads - Total Nitrogen 172
Table 6:16: Measured Loads vs. Modeled Loads for Total Nitrogen for the UWRBC Phase 2 Project Area 173
Table 6-17: Measured Loads vs. Modeled Loads - Total Phosphorus 173
Table 6:18: Measured Loads vs. Modeled Loads for Total Phosphorus for the UWRBC Phase 2 Project Area 174
Table 6-19: Measured Loads - *E. coli* 174
Table 6-20: Measured Loads for *E. coli* for the UWRBC Phase 2 Project Area 174
Table 6-21: Measured vs. Modeled Load Reduction Estimates - Nitrate 175
Table 6-22: Measured vs. Modeled Load Reduction Estimates - Total Phosphorus 176
Table 6-23: Measured Load Reduction Estimates for *E. coli* 176
Table 6-24: Nitrate LDC Flow Zones – Modeled Loads Exceed Target Loads and Required Reductions 177
Table 6-25: Nitrite LDC Flow Zones – Modeled Loads Exceed Target Loads and Required Reductions 178
Table 6-26: Total Nitrogen LDC Flow Zones – Modeled Loads Exceed Target Loads and Required Reductions 179
Table 6-27: Total Phosphorus LDC Flow Zones – Modeled Loads Exceed Target Loads and Required Reductions 180
Table 6-28: *E. coli* LDC Flow Zones – Modeled Loads Exceed Target Loads and Required Reductions 181
Table 7-1: Critical Land Area for Nutrients 189
Table 7-2: Critical Land Area for *E. coli* 191
Table 7-3: Critical Land Area for Sediment 193
Table 7-4: Critical Land Area for Habitat and Biology 195

Table 7-5: Critical Land Area for Flooding/Floodplain Management.....197
Table 7-6: Priority Critical Land Areas 199
Table 8-1: Best Management Practices or Measures for Critical Land Areas with Expected Load Reductions 203
Table 8-2: Load Reductions Necessary to Meet Goals.....205
Table 8-3: Estimated Acres needed to meet Nitrate Load Reduction Goals 206
Table 8-4: Estimated Acres needed to meet Phosphorus Load Reduction Goals.....207
Table 8-5: Action Register and Schedule of UWRBC Activities 209