


\* For an outside obstruction with no pavement located to the outside of the obstruction, D2 is defined to be greater than 50 ft.

MULTI-LANE DIVIDED FACILITY OFFSETS

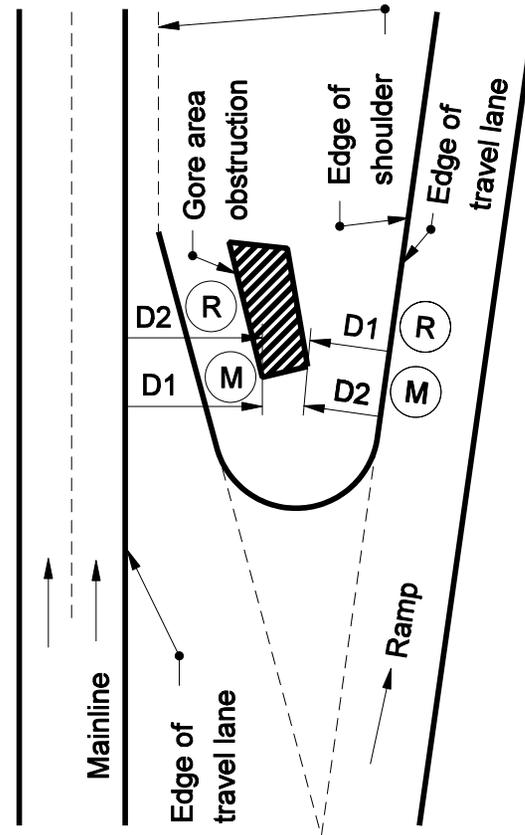

Use smaller of D1 values

(M) Mainline

(R) Ramp

GORE AREA OFFSETS

IMPACT ATTENUATOR OFFSET EXAMPLES

Figure 49-6A