MULTI-LANE DIVIDED HIGHWAY

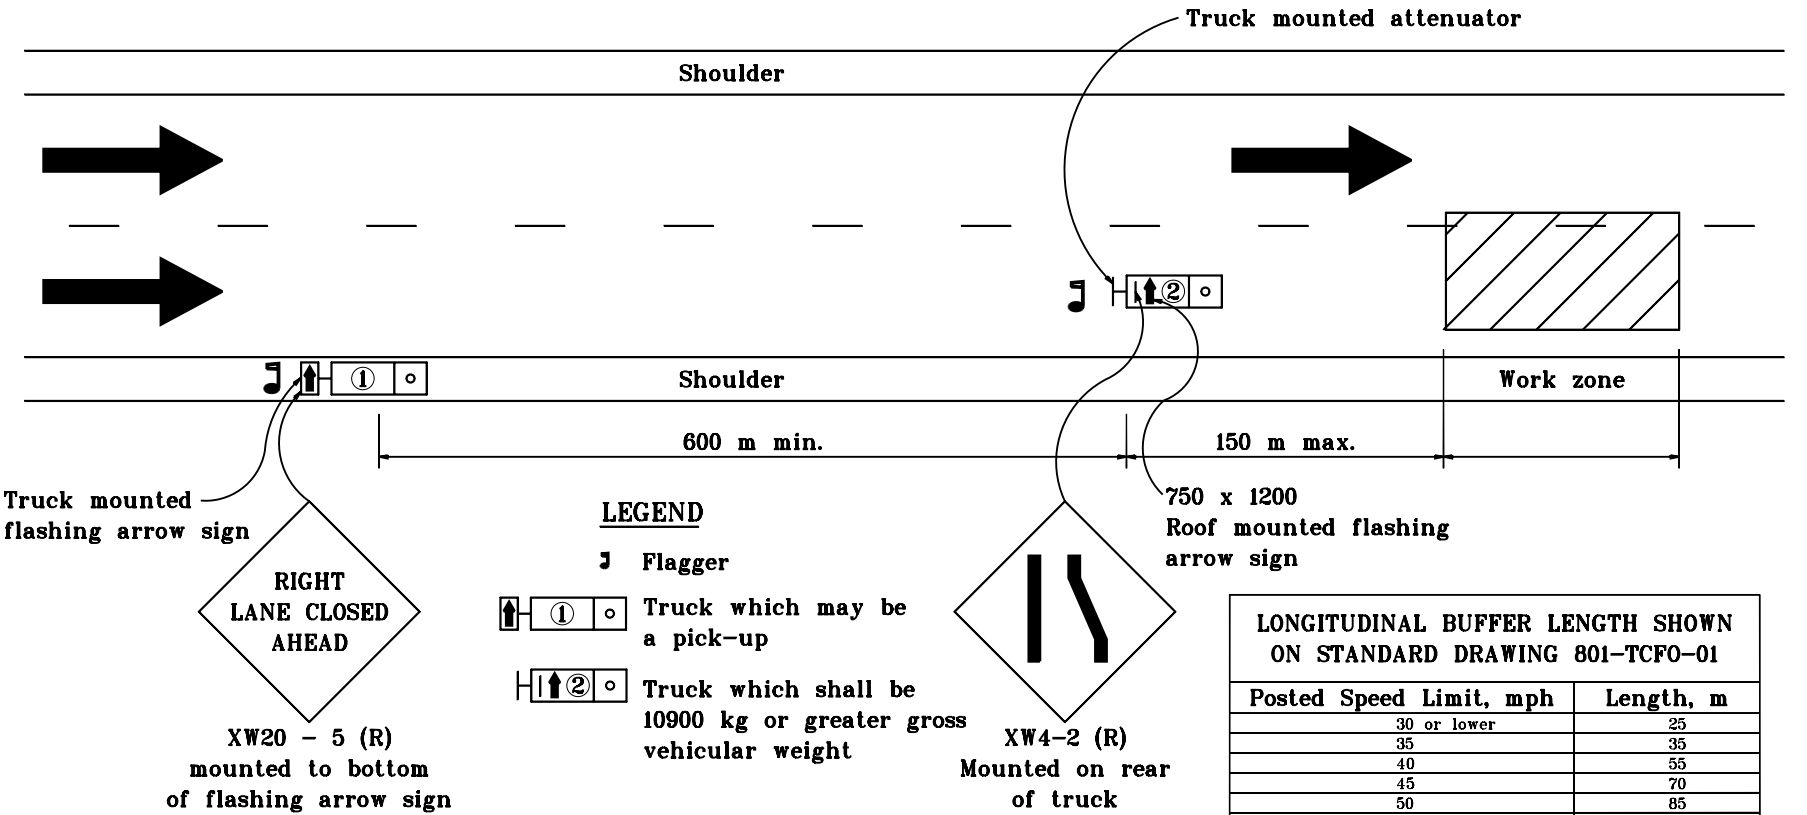

LEGEND

- Flagger
- Truck which may be a pick-up
- Truck which shall be 10900 kg or greater gross vehicular weight

LONGITUDINAL BUFFER LENGTH SHOWN ON STANDARD DRAWING 801-TCFO-01	
Posted Speed Limit, mph	Length, m
30 or lower	25
35	35
40	55
45	70
50	85
55	105
60	125
65	150

GENERAL NOTES

1. Flagger shall be used while trucks are stopped.
2. Strobe lights will be required on all vehicles.
3. Distances shown are approximate and may be adjusted as directed.

(4) Truck mounted attenuator shall be designed to attenuate impacts by a pickup truck of 2000 kg gross vehicular mass st km/h.

All dimensions are in mm unless otherwise specified.

INDIANA DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC FOR REFLECTOR REPLACEMENT

MAY 2000

STANDARD DRAWING NO. **801-TCFO-03**

ANTHONY L. UREMOVICH REGISTERED No. 18095 STATE OF INDIANA PROFESSIONAL ENGINEER

DESIGN STANDARDS ENGINEER

/s/ Anthony L. Uremovich 5-01-00
DESIGN STANDARDS ENGINEER DATE

/s/ Firooz Zandi 5-01-00
CHIEF HIGHWAY ENGINEER DATE