

**STATE OF INDIANA**  
**DEPARTMENT OF ENVIRONMENTAL MANAGEMENT**  
**PUBLIC NOTICE NO: 20260225 – IN0064424 – D**  
**DATE OF NOTICE: February 25, 2026**  
**DATE RESPONSE DUE: March 27, 2026**

The Office of Water Quality proposes the following DRAFT NPDES PERMIT:

**MINOR – RENEWAL:**

**General Motors LLC – GM Remediation**, Permit No. IN0064424, LAWRENCE COUNTY, 105 GM Drive, Bedford, IN. The facility is an aluminum die casting and aluminum foundry. This facility discharges 0.084 MGD of stormwater, groundwater remediation, leachate and GWTP maintenance and decontamination to an unnamed tributary to Pleasant Run via Outfall 004. Outfall 004 is located at Latitude: 38° 52' 49.08", Longitude: -86° 28' 46.92" Permit Manager: Riley Marshall, 317/234-3568, [remarsha@idem.in.gov](mailto:remarsha@idem.in.gov). Posted online at <https://www.in.gov/idem/public-notices/>.

**PROCEDURES TO FILE A RESPONSE**

You are hereby notified of the availability of a 30-day public comment period regarding the referenced draft permit, in accordance with 327 IAC 5-3-9. The application and draft permit documents are available for inspection at IDEM, Office of Water Quality, Indiana Government Center North, 100 N. Senate Ave, Indianapolis, IN 46204 from 9:00 a.m. until 4:00 p.m., Monday thru Friday, (copies 10¢ per page). The Draft Permit is posted online on the above-referenced IDEM public notice web page. A courtesy copy has also been sent via email to the local County Health Department. Please tell others whom you think would be interested in this matter. For more information about public participation including your rights & responsibilities, please see <https://www.in.gov/idem/public-notices/>. You may want to consult our online Citizens' Guide to IDEM: <https://www.in.gov/idem/resources/citizens-guide-to-idem/>.

**Comments:** The proposed decision to issue a permit is tentative. Interested persons are invited to submit written comments on the draft permit. All comments must be delivered to IDEM or postmarked no later than the Response Due Date noted to be considered in the decision to issue a final permit. Deliver or mail all requests or comments to the attention of the Permit Manager at the above address.

**To Request a Public Hearing:** Any person may request a public hearing. A written request must be submitted to the above address on or before the Response Due Date. The written request shall include: the name and address of the person making the request, the interest of the person making the request, persons represented by the person making the request, the reason for the request and the issues proposed for consideration at the hearing. The Department will determine whether to hold a public hearing based upon the comments and the rationale for the request. Public Notice of such a hearing will be posted on IDEM's web page for public notices and notifications will also be sent to those persons submitting comments and/or on the mailing list at least 30 days prior to the hearing.



## INDIANA DEPARTMENT OF ENVIRONMENTAL MANAGEMENT

100 N. Senate Avenue • Indianapolis, IN 46204  
(800) 451-6027 • (317) 232-8603 • Fax (317) 233-6647 • [www.idem.IN.gov](http://www.idem.IN.gov)

**Mike Braun**  
Governor

**Clint Woods**  
Commissioner

February 25, 2026

VIA ELECTRONIC MAIL

Mr. Edward Peterson, Remediation Project Manager  
General Motors LLC – GM Remediation  
30400 Van Dyke Avenue  
Warren, Michigan 48093

Dear Mr. Peterson:

Re: NPDES Permit No. IN0064424  
Draft Permit  
General Motors LLC – GM Remediation  
Bedford, IN – Lawrence County

Your application and supporting documents have been reviewed and processed in accordance with rules adopted under 327 IAC 5. Enclosed is a copy of the draft NPDES Permit.

Pursuant to IC 13-15-5-1, IDEM will publish the draft permit document online at <https://www.in.gov/idem/public-notices/>. Additional information on public participation can be found in the "Citizens' Guide to IDEM", available at <https://www.in.gov/idem/resources/citizens-guide-to-idem/>. A 30-day comment period is available to solicit input from interested parties, including the public.

Please review this draft permit and associated documents carefully to become familiar with the proposed terms and conditions. Comments concerning the draft permit should be submitted in accordance with the procedure outlined in the enclosed public notice form. We suggest that you meet with us to discuss major concerns or objections you may have with the draft permit.

Questions concerning this draft permit may be addressed to Riley Marshall of my staff, at 317-234-3568 or [remarsha@idem.in.gov](mailto:remarsha@idem.in.gov).

Sincerely,

Richard Hamblin, Chief  
Industrial NPDES Permits Section  
Office of Water Quality

Enclosures

cc: Lawrence County Health Department  
Christina Sandlin, IDEM



STATE OF INDIANA  
DEPARTMENT OF ENVIRONMENTAL MANAGEMENT  
AUTHORIZATION TO DISCHARGE UNDER THE  
NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM

In compliance with the provisions of the Federal Water Pollution Control Act, as amended, (33 U.S.C. 1251 et seq., the "Clean Water Act" or "CWA"), and IDEM's authority under IC 13-15,

GENERAL MOTORS LLC – GM REMEDIATION

is authorized to discharge from a water treatment system that is located at 105 GM Drive, Bedford, Indiana, to receiving waters identified as an unnamed tributary for Pleasant Run in accordance with effluent limitations, monitoring requirements, and other conditions set forth in Parts I and II hereof. This permit may be revoked for the nonpayment of applicable fees in accordance with IC 13-18-20.

Effective Date: \_\_\_\_\_

Expiration Date: \_\_\_\_\_

In order to receive authorization to discharge beyond the date of expiration, the permittee shall submit such information and forms as are required by the Indiana Department of Environmental Management no later than 180 days prior to the date of expiration.

Issued on \_\_\_\_\_ for the Indiana Department of Environmental Management.

Jerry Dittmer, Chief  
Permits Branch  
Office of Water Quality

PART I

A. EFFLUENT LIMITATIONS AND MONITORING REQUIREMENTS

- The permittee is authorized to discharge from the outfall listed below in accordance with the terms and conditions of this permit. The permittee is authorized to discharge from Outfall 004, located at Latitude 38° 52' 49.08", Longitude -86° 26' 46.92". The discharge is limited to treated groundwater and leachate, rinse water from building maintenance, filter backwash, other remediation waters (as described in the Briefing Memo), and stormwater from the retention pond in emergency situations. Samples taken in compliance with the monitoring requirements below shall be taken at a point representative of the discharge but prior to entry into unnamed tributary to Pleasant Run. Such discharge shall be limited and monitored by the permittee as specified below:

DISCHARGE LIMITATIONS [1][2]  
Outfall 004

Table 1

Parameter	Quantity or Loading			Quality or Concentration			Monitoring Requirements	
	Monthly Average	Daily Maximum	Units	Monthly Average	Daily Maximum	Units	Measurement Frequency	Sample Type
Flow	Report	Report	MGD	----	----	----	5 X Weekly	24 Hr. Total
Oil & Grease	-----	-----	-----	-----	10	mg/l	1 X Quarterly [6]	Grab
TSS	-----	-----	-----	10	15	mg/l	1 X Monthly	Grab
PCBs [4][5]	-----	-----	-----	0.00079	0.0019	ug/l	1 X Monthly	24 Hr. Comp.

Table 2

Parameter	Quality or Concentration				Monitoring Requirements	
	Daily Minimum	Monthly Average	Daily Maximum	Units	Measurement Frequency	Sample Type
pH [3]	6.0	----	9.0	s.u.	1 X Weekly	Grab

[1] See Part I.B. of the permit for the minimum narrative limitations.

- [2] In the event that a new water treatment additive is to be used that will contribute to this Outfall, or changes are to be made in the use of water treatment additives, including dosage, the permittee must apply for and receive approval from IDEM prior to such discharge. Discharges of any such additives must meet Indiana water quality standards. The permittee must apply for permission to use water treatment additives by completing and submitting State Form 50000 (Application for Approval to Use Water Treatment Additives) currently available at: <https://www.in.gov/idem/forms/idem-agency-forms/>.
- [3] If the permittee collects more than one grab sample on a given day for pH, the values shall not be averaged for reporting daily maximums or daily minimums. The permittee must report the individual minimum and the individual maximum pH value of any sample during the month on the Monthly Monitoring Report form.
- [4] The water quality based effluent limit (WQBEL) for PCBs is less than the limit of quantitation (LOQ) as specified in footnote [5]. Compliance with this permit will be demonstrated if the effluent concentrations measured are less than the LOQ.

If the measured concentration of PCBs is greater than the water quality based effluent limitations and above the respective LOD specified in footnote [5] in any three (3) consecutive analyses, or any five (5) out of nine (9) analyses, then the discharger shall:

- (1) Determine the source of the parameter through an evaluation of sampling techniques, analytical/laboratory procedures, and waste streams (including internal waste streams);
- (2) The sampling and analysis for PCBs shall be increased to 2 X Monthly and remain at this increased sampling frequency until:
  - (a) The increased sampling frequency for PCBs has been in place for at least five (5) months;
  - (b) At least nine (9) samples have been taken under this increased sampling frequency; and
  - (c) The measured concentration of [\*] is less than the LOD specified in footnote [\*] in at least seven (7) out of the nine (9) most recent analyses.

- [5] The following EPA approved test methods and associated LODs and LOQs are to be used in the analysis of the effluent samples. Alternative methods may be used if first approved by IDEM and EPA, if applicable.

<u>Parameter</u>	<u>Test Method</u>	<u>LOD</u>	<u>LOQ</u>
*Total PCBs	608	0.1 µg/l	0.3 µg/l
*Total PCBs is the sum of the following aroclors: PCB-1016, PCB-1221, PCB-1232, PCB-1242, PCB-1248, PCB-1254, and PCB-1260.			

Case-Specific LOD/LOQ

The permittee may determine and use a case-specific LOD or LOQ using the analytical method specified above, or any other analytical method which is approved by the Commissioner, and EPA if applicable, prior to use. The LOD shall be derived by the procedure specified for method detection limits contained in 40 CFR Part 136, Appendix B, and the LOQ shall be set equal to 3.18 times the LOD. Other methods may be used if first approved by the Commissioner.

- [6] Samples shall be taken once at any time during each of the four annual quarters:
- (A) January-February-March;
  - (B) April-May-June;
  - (C) July-August-September; and
  - (D) October-November-December.

For quarterly monitoring, in the first quarter for example, the permittee may conduct sampling within the month of January, February or March. The result from this reporting timeframe shall be reported on the March DMR, regardless of which of the months within the quarter the sample was taken.

B. MINIMUM NARRATIVE LIMITATIONS

At all times the discharge from any and all point sources specified within this permit shall not cause receiving waters:

1. including waters within the mixing zone, to contain substances, materials, floating debris, oil, scum attributable to municipal, industrial, agricultural, and other land use practices, or other discharges that do any of the following:
  - a. will settle to form putrescent or otherwise objectionable deposits;
  - b. are in amounts sufficient to be unsightly or deleterious;
  - c. produce color, visible oil sheen, odor, or other conditions in such degree as to create a nuisance;
  - d. are in amounts sufficient to be acutely toxic to, or to otherwise severely injure or kill aquatic life, other animals, plants, or humans;
  - e. are in concentrations or combinations that will cause or contribute to the growth of aquatic plants or algae to such a degree as to create a nuisance, be unsightly, or otherwise impair the designated uses.
2. outside the mixing zone, to contain substances in concentrations that on the basis of available scientific data are believed to be sufficient to injure, be chronically toxic to, or be carcinogenic, mutagenic, or teratogenic to humans, animals, aquatic life, or plants.

C. MONITORING AND REPORTING

1. Representative Sampling

Samples and measurements taken as required herein shall be representative of the volume and nature of the monitored discharge flow and shall be taken at times which reflect the full range and concentration of effluent parameters normally expected to be present. Samples shall not be taken at times to avoid showing elevated levels of any parameters.

2. Monthly Reporting

The permittee shall submit accurate monitoring reports to the Indiana Department of Environmental Management (IDEM) containing results obtained during the previous month and shall be submitted no later than the 28th day of the month following each completed monitoring period. The first report shall be submitted by the 28th day of the month following the month in which the permit becomes effective.

These reports shall include, but not necessarily be limited to, the Discharge Monitoring Report (DMR) and the Monthly Monitoring Report (MMR). All reports shall be submitted electronically by using the NetDMR application, upon registration, receipt of the NetDMR Subscriber Agreement, and IDEM approval of the proposed NetDMR Signatory. Access the NetDMR website (for initial registration and DMR/MMR submittal) via CDX at: <https://cdx.epa.gov/>. The Regional Administrator may request the permittee to submit monitoring reports to the Environmental Protection Agency if it is deemed necessary to assure compliance with the permit. See Part II.C.10 of this permit for Future Electronic Reporting Requirements.

- a. Calculations that require averaging of measurements of daily values (both concentrations and mass) shall use an arithmetic mean, except the monthly average for *E. coli* shall be calculated as a geometric mean.
- b. Daily effluent values (both mass and concentration) that are less than the LOQ that are used to determine the monthly average effluent level shall be accommodated in calculation of the average using statistical methods that have been approved by the Commissioner.
- c. Effluent concentrations less than the LOD shall be reported on the Discharge Monitoring Report (DMR) forms as < (less than) the value of the LOD. For example, if a substance is not detected at a concentration of 0.1 µg/l, report the value as <0.1 µg/l.
- d. Effluent concentrations greater than or equal to the LOD and less than the LOQ that are reported on a DMR shall be reported as the actual value and annotated on the DMR to indicate that the value is not quantifiable.
- e. Mass discharge values which are calculated from concentrations reported as less than the value of the limit of detection shall be reported as less than the corresponding mass discharge value.
- f. Mass discharge values that are calculated from effluent concentrations greater than the limit of detection shall be reported as the calculated value.

### 3. Definitions

- a. "Monthly Average" means the total mass or flow-weighted concentration of all daily discharges during a calendar month on which daily discharges are sampled or measured, divided by the number of daily discharges sampled and/or measured during such calendar month.

The monthly average discharge limitation is the highest allowable average monthly discharge for any calendar month.

- b. “Daily Discharge” means the total mass of a pollutant discharged during the calendar day or, in the case of a pollutant limited in terms other than mass pursuant to 327 IAC 5-2-11(e), the average concentration or other measurement of the pollutant specified over the calendar day or any twenty-four-hour period that reasonably represents the calendar day for the purposes of sampling.
- c. “Daily Maximum” means the maximum allowable daily discharge for any calendar day.
- d. A “24-hour composite sample” means a sample consisting of at least three (3) individual flow-proportioned samples of wastewater, taken by the grab sample method or by an automatic sampler, which are taken at approximately equally spaced time intervals for the duration of the discharge within a 24-hour period and which are combined prior to analysis. A flow-proportioned composite sample may be obtained by following the procedure as follows:
  - (1) recording the discharge flow rate at the time each individual sample is taken,
  - (2) adding together the discharge flow rates recorded from each individual sampling time to formulate the “total flow” value,
  - (3) the discharge flow rate of each individual sampling time is divided by the total flow value to determine its percentage of the total flow value,
  - (4) then multiply the volume of the total composite sample by each individual sample’s percentage to determine the volume of that individual sample which will be included in the total composite sample.
- e. “Concentration” means the weight of any given material present in a unit volume of liquid. Unless otherwise indicated in this permit, concentration values shall be expressed in milligrams per liter (mg/l).
- f. The “Regional Administrator” is defined as the Region 5 Administrator, U.S. EPA, located at 77 West Jackson Boulevard, Chicago, IL 60604.

- g. The "Commissioner" is defined as the Commissioner of the Indiana Department of Environmental Management, which is located at the following address: 100 North Senate Avenue, Indianapolis, IN 46204.
- h. "Limit of Detection" or "LOD" means the minimum concentration of a substance that can be measured and reported with ninety-nine percent (99%) confidence that the analyte concentration is greater than zero (0) for a particular analytical method and sample matrix.
- i. "Limit of Quantitation" or "LOQ" means a measurement of the concentration of a contaminant obtained by using a specified laboratory procedure calibrated at a specified concentration above the method detection level. It is considered the lowest concentration at which a particular contaminant can be quantitatively measured using a specified laboratory procedure for monitoring of the contaminant. This term is also sometimes called limit of quantification or quantification level.
- j. "Method Detection Level" or "MDL" means the minimum concentration of an analyte (substance) that can be measured and reported with a ninety-nine percent (99%) confidence that the analyte concentration is greater than zero (0) as determined by procedure set forth in 40 CFR 136, Appendix B. The method detection level or MDL is equivalent to the LOD.
- k. "Grab Sample" means a sample which is taken from a wastestream on a one-time basis without consideration of the flow rate of the wastestream and without considerations of time.

4. Test Procedures

The analytical and sampling methods used shall conform to the version of 40 CFR 136 incorporated by reference in 327 IAC 5. Different but equivalent methods are allowable if they receive the prior written approval of the Commissioner and the U.S. Environmental Protection Agency. When more than one test procedure is approved for the purposes of the NPDES program under 40 CFR 136 for the analysis of a pollutant or pollutant parameter, the test procedure must be sufficiently sensitive as defined at 40 CFR 122.21(e)(3) and 122.44(i)(1)(iv).

5. Recording of Results

For each measurement or sample taken pursuant to the requirements of this permit, the permittee shall maintain records of all monitoring information and monitoring activities, including:

- a. The date, exact place and time of sampling or measurement(s);
- b. The person(s) who performed the sampling or measurement(s);
- c. The date(s) analyses were performed;
- d. The person(s) who performed the analyses;
- e. The analytical techniques or methods used; and
- f. The results of such measurements and analyses.

6. Additional Monitoring by Permittee

If the permittee monitors any pollutant at the location(s) designated herein more frequently than required by this permit, using approved analytical methods as specified above, the results of this monitoring shall be included in the calculation and reporting of the values required in the monthly Discharge Monitoring Report (DMR) and Monthly Monitoring Report (MMR). Such increased frequency shall also be indicated. Other monitoring data not specifically required in this permit (such as internal process or internal waste stream data) which is collected by or for the permittee need not be submitted unless requested by the Commissioner.

7. Records Retention

All records and information resulting from the monitoring activities required by this permit, including all records of analyses performed and calibration and maintenance of instrumentation and recording from continuous monitoring instrumentation, shall be retained for a minimum of three (3) years. In cases where the original records are kept at another location, a copy of all such records shall be kept at the permitted facility. The three years shall be extended:

- a. automatically during the course of any unresolved litigation regarding the discharge of pollutants by the permittee or regarding promulgated effluent guidelines applicable to the permittee; or
- b. as requested by the Regional Administrator or the Indiana Department of Environmental Management.

D. REOPENING CLAUSES

This permit may be modified, or alternately, revoked and reissued, after public notice and opportunity for hearing:

1. to comply with any applicable effluent limitation or standard issued or approved under 301(b)(2)(C),(D) and (E), 304 (b)(2), and 307(a)(2) of the Clean Water Act, if the effluent limitation or standard so issued or approved:
  - a. contains different conditions or is otherwise more stringent than any effluent limitation in the permit; or
  - b. controls any pollutant not limited in the permit.
2. for any of the causes listed under 327 IAC 5-2-16.
3. to include a case-specific Limit of Detection (LOD) and/or Limit of Quantitation (LOQ). The permittee must demonstrate that such action is warranted in accordance with the procedures specified under Appendix B, 40 CFR Part 136, using the most sensitive analytical methods approved by EPA under 40 CFR Part 136, or approved by the Commissioner.

## PART II

### STANDARD CONDITIONS FOR NPDES PERMITS

#### A. GENERAL CONDITIONS

##### 1. Duty to Comply

The permittee shall comply with all terms and conditions of this permit in accordance with 327 IAC 5-2-8(1) and all other requirements of 327 IAC 5-2-8. Any permit noncompliance constitutes a violation of the Clean Water Act and IC 13 and is grounds for enforcement action or permit termination, revocation and reissuance, modification, or denial of a permit renewal application.

It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of the permit.

##### 2. Duty to Mitigate

In accordance with 327 IAC 5-2-8(3), the permittee shall take all reasonable steps to minimize or correct any adverse impact to the environment resulting from noncompliance with this permit. During periods of noncompliance, the permittee shall conduct such accelerated or additional monitoring for the affected parameters, as appropriate or as requested by IDEM, to determine the nature and impact of the noncompliance.

##### 3. Duty to Reapply

If the permittee wishes to continue an activity regulated by this permit after the expiration date of this permit, the permittee must obtain and submit an application for renewal of this permit in accordance with 327 IAC 5-2-8(2). It is the permittee's responsibility to obtain and submit the application. In accordance with 327 IAC 5-2-3(c), the owner of the facility or operation from which a discharge of pollutants occurs is responsible for applying for and obtaining the NPDES permit, except where the facility or operation is operated by a person other than an employee of the owner in which case it is the operator's responsibility to apply for and obtain the permit. Pursuant to 327 IAC 5-3-2(a)(2), the application must be submitted at least 180 days before the expiration date of this permit. This deadline may be extended if all of the following occur:

- a. permission is requested in writing before such deadline;
- b. IDEM grants permission to submit the application after the deadline; and
- c. the application is received no later than the permit expiration date.

#### 4. Permit Transfers

In accordance with 327 IAC 5-2-8(4)(D), this permit is nontransferable to any person except in accordance with 327 IAC 5-2-6(c). This permit may be transferred to another person by the permittee, without modification or revocation and reissuance being required under 327 IAC 5-2-16(c)(1) or 16(e)(4), if the following occurs:

- a. the current permittee notified the Commissioner at least thirty (30) days in advance of the proposed transfer date;
- b. a written agreement containing a specific date of transfer of permit responsibility and coverage between the current permittee and the transferee (including acknowledgment that the existing permittee is liable for violations up to that date, and the transferee is liable for violations from that date on) is submitted to the Commissioner;
- c. the transferee certifies in writing to the Commissioner their intent to operate the facility without making such material and substantial alterations or additions to the facility as would significantly change the nature or quantities of pollutants discharged and thus constitute cause for permit modification under 327 IAC 5-2-16(d). However, the Commissioner may allow a temporary transfer of the permit without permit modification for good cause, e.g., to enable the transferee to purge and empty the facility's treatment system prior to making alterations, despite the transferee's intent to make such material and substantial alterations or additions to the facility; and
- d. the Commissioner, within thirty (30) days, does not notify the current permittee and the transferee of the intent to modify, revoke and reissue, or terminate the permit and to require that a new application be filed rather than agreeing to the transfer of the permit.

The Commissioner may require modification or revocation and reissuance of the permit to identify the new permittee and incorporate such other requirements as may be necessary under the Clean Water Act or state law.

#### 5. Permit Actions

- a. In accordance with 327 IAC 5-2-16(b) and 327 IAC 5-2-8(4), this permit may be modified, revoked and reissued, or terminated for cause, including, but not limited to, the following:
  - (1) Violation of any terms or conditions of this permit;
  - (2) Failure of the permittee to disclose fully all relevant facts or misrepresentation of any relevant facts in the application, or during the permit issuance process; or

- (3) A change in any condition that requires either a temporary or a permanent reduction or elimination of any discharge controlled by the permit, e.g., plant closure, termination of discharge by connection to a POTW, a change in state law that requires the reduction or elimination of the discharge, or information indicating that the permitted discharge poses a substantial threat to human health or welfare.
- b. Filing of either of the following items does not stay or suspend any permit condition: (1) a request by the permittee for a permit modification, revocation and reissuance, or termination, or (2) submittal of information specified in Part II.A.3 of the permit including planned changes or anticipated noncompliance.

The permittee shall submit any information that the permittee knows or has reason to believe would constitute cause for modification or revocation and reissuance of the permit at the earliest time such information becomes available, such as plans for physical alterations or additions to the permitted facility that:

- (1) could significantly change the nature of, or increase the quantity of pollutants discharged; or
  - (2) the commissioner may request to evaluate whether such cause exists.
- c. In accordance with 327 IAC 5-1-3(a)(5), the permittee must also provide any information reasonably requested by the Commissioner.

## 6. Property Rights

Pursuant to 327 IAC 5-2-8(6) and 327 IAC 5-2-5(b), the issuance of this permit does not convey any property rights of any sort or any exclusive privileges, nor does it authorize any injury to persons or private property or invasion of other private rights, any infringement of federal, state, or local laws or regulations. The issuance of the permit also does not preempt any duty to obtain any other state, or local assent required by law for the discharge or for the construction or operation of the facility from which a discharge is made.

## 7. Severability

In accordance with 327 IAC 1-1-3, the provisions of this permit are severable and, if any provision of this permit or the application of any provision of this permit to any person or circumstance is held invalid, the invalidity shall not affect any other provisions or applications of the permit which can be given effect without the invalid provision or application.

8. Oil and Hazardous Substance Liability

Nothing in this permit shall be construed to relieve the permittee from any responsibilities, liabilities, or penalties to which the permittee is or may be subject to under Section 311 of the Clean Water Act.

9. State Laws

Nothing in this permit shall be construed to preclude the institution of any legal action or relieve the permittee from any responsibilities, liabilities, or penalties established pursuant to any applicable state law or regulation under authority preserved by Section 510 of the Clean Water Act or state law.

10. Penalties for Violation of Permit Conditions

Pursuant to IC 13-30-4, a person who violates any provision of this permit, the water pollution control laws; environmental management laws; or a rule or standard adopted by the Environmental Rules Board is liable for a civil penalty not to exceed twenty-five thousand dollars (\$25,000) per day of any violation.

Pursuant to IC 13-30-5, a person who obstructs, delays, resists, prevents, or interferes with (1) the department; or (2) the department's personnel or designated agent in the performance of an inspection or investigation performed under IC 13-14-2-2 commits a class C infraction.

Pursuant to IC 13-30-10-1.5(e), a person who willfully or negligently violates any NPDES permit condition or filing requirement, or any applicable standards or limitations of IC 13-18-3-2.4, IC 13-18-4-5, IC 13-18-12, IC 13-18-14, IC 13-18-15, or IC 13-18-16, commits a Class A misdemeanor.

Pursuant to IC 13-30-10-1.5(i), an offense under IC 13-30-10-1.5(e) is a Level 4 felony if the person knowingly commits the offense and knows that the commission of the offense places another person in imminent danger of death or serious bodily injury. The offense becomes a Level 3 felony if it results in serious bodily injury to any person, and a Level 2 felony if it results in death to any person.

Pursuant to IC 13-30-10-1.5(g), a person who willfully or recklessly violates any applicable standards or limitations of IC 13-18-8 commits a Class B misdemeanor.

Pursuant to IC 13-30-10-1.5(h), a person who willfully or recklessly violates any applicable standards or limitations of IC 13-18-9, IC 13-18-10, or IC 13-18-10.5 commits a Class C misdemeanor.

Pursuant to IC 13-30-10-1, a person who knowingly or intentionally makes any false material statement, representation, or certification in any NPDES form, notice, or report commits a Class B misdemeanor.

11. Penalties for Tampering or Falsification

In accordance with 327 IAC 5-2-8(10), the permittee shall comply with monitoring, recording, and reporting requirements of this permit. The Clean Water Act, as well as IC 13-30-10-1, provides that any person who knowingly or intentionally (a) destroys, alters, conceals, or falsely certifies a record, (b) tampers with, falsifies, or renders inaccurate or inoperative a recording or monitoring device or method, including the data gathered from the device or method, or (c) makes a false material statement or representation in any label, manifest, record, report, or other document; all required to be maintained under the terms of a permit issued by the department commits a Class B misdemeanor.

12. Toxic Pollutants

If any applicable effluent standard or prohibition (including any schedule of compliance specified in such effluent standard or prohibition) is established under Section 307(a) of the Clean Water Act for a toxic pollutant injurious to human health, and that standard or prohibition is more stringent than any limitation for such pollutant in this permit, this permit shall be modified or revoked and reissued to conform to the toxic effluent standard or prohibition in accordance with 327 IAC 5-2-8(5). Effluent standards or prohibitions established under Section 307(a) of the Clean Water Act for toxic pollutants injurious to human health are effective and must be complied with, if applicable to the permittee, within the time provided in the implementing regulations, even absent permit modification.

13. Wastewater Treatment Plant and Certified Operators

Pursuant to IC 13-18-11-11 and 327 IAC 5-23-6, a permittee's wastewater treatment plant must be under the responsible charge of an operator certified by the Commissioner in a classification corresponding to the classification of the wastewater treatment plant as determined under 327 IAC 5-23-4.

A certified operator may be designated as being in responsible charge of more than one (1) wastewater treatment plant if the requirements under 327 IAC 5-23-7(b) are met. "Operator in responsible charge" is defined at 327 IAC 5-23-2(16).

Pursuant to 327 IAC 5-23-6(4)(A), the permittee shall notify IDEM when there is a change in the person serving as the certified operator in responsible charge of the wastewater treatment facility. The notification shall be made no later than thirty (30) days after a change in the operator and submitted via e-mail to the Compliance Data Section of the Office of Water Quality at [WWReports@idem.IN.gov](mailto:WWReports@idem.IN.gov).

14. Construction Permit

In accordance with IC 13-14-8-11.6, a discharger is not required to obtain a state permit for the modification or construction of a water pollution treatment or control facility if the discharger has an effective NPDES permit.

If the discharger modifies their existing water pollution treatment or control facility or constructs a new water pollution treatment or control facility for the treatment or control of any new influent pollutant or increased levels of any existing pollutant, then, within thirty (30) days after commencement of operation, the discharger shall file with the Department of Environment Management a notice of installation for the additional pollutant control equipment and a design summary of any modifications.

The notice and design summary shall be sent to the Office of Water Quality, Industrial NPDES Permits Section, 100 North Senate Avenue, Indianapolis, IN 46204-2251.

15. Inspection and Entry

In accordance with 327 IAC 5-2-8(8), the permittee shall allow the Commissioner, or an authorized representative, (including an authorized contractor acting as a representative of the Commissioner) upon the presentation of credentials and other documents as may be required by law, to:

- a. Enter upon the permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept pursuant to the conditions of this permit;
- b. Have access to and copy, at reasonable times, any records that must be kept under the terms and conditions of this permit;
- c. Inspect at reasonable times any facilities, equipment or methods (including monitoring and control equipment), practices, or operations regulated or required pursuant to this permit; and
- d. Sample or monitor at reasonable times, any discharge of pollutants or internal wastestreams for the purposes of evaluating compliance with the permit or as otherwise authorized.

16. New or Increased Discharge of Pollutants

This permit prohibits the permittee from undertaking any action that would result in a new or increased discharge of a bioaccumulative chemical of concern (BCC) or a new or increased permit limit for a regulated pollutant that is not a BCC unless one of the following is completed prior to the commencement of the action:

- a. Information is submitted to the Commissioner demonstrating that the proposed new or increased discharges will not cause a significant lowering of water quality as defined under 327 IAC 2-1.3-2(50). Upon review of this information, the Commissioner may request additional information or may determine that the proposed increase is a significant lowering of water quality and require the submittal of an antidegradation demonstration.
- b. An antidegradation demonstration is submitted to and approved by the Commissioner in accordance with 327 IAC 2-1.3-5 and 327 IAC 2-1.3-6.

## B. MANAGEMENT REQUIREMENTS

### 1. Proper Operation and Maintenance

The permittee shall at all times maintain in good working order and efficiently operate all facilities and systems (and related appurtenances) for the collection and treatment which are installed or used by the permittee and which are necessary for achieving compliance with the terms and conditions of this permit in accordance with 327 IAC 5-2-8(9).

Neither 327 IAC 5-2-8(9), nor this provision, shall be construed to require the operation of installed treatment facilities that are unnecessary for achieving compliance with the terms and conditions of the permit.

### 2. Bypass of Treatment Facilities

Pursuant to 327 IAC 5-2-8(12), the following are requirements for bypass:

- a. The following definitions:
  - (1) "Bypass" means the intentional diversion of a waste stream from any portion of a treatment facility.
  - (2) "Severe property damage" means substantial physical damage to property, damage to the treatment facilities which would cause them to become inoperable, or substantial and permanent loss of natural resources which can reasonably be expected to occur in the absence of a bypass. Severe property damage does not mean economic loss caused by delays in production.
- b. The permittee may allow a bypass to occur that does not cause a violation of the effluent limitations contained in this permit, but only if it is also for essential maintenance to assure efficient operation. These bypasses are not subject to Part II.B.2.c. and d.

- c. The permittee must provide the Commissioner with the following notice:
- (1) If the permittee knows or should have known in advance of the need for a bypass (anticipated bypass), it shall submit prior written notice. If possible, such notice shall be provided at least ten (10) days before the date of the bypass for approval by the Commissioner.
  - (2) As required by 327 IAC 5-2-8(11)(C), the permittee shall orally report an unanticipated bypass that exceeds any effluent limitations in the permit within twenty-four (24) hours from the time the permittee becomes aware of such noncompliance. A written submission shall also be provided within five (5) days of the time the permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times; and if the cause of noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate and prevent recurrence of the noncompliance. If a complete report is submitted by e-mail within 24 hours of the noncompliance, then that e-mail report will satisfy both the oral and written reporting requirement. E-mails should be sent to [wwreports@idem.in.gov](mailto:wwreports@idem.in.gov).
- d. The following provisions are applicable to bypasses:
- (1) Except as provided by Part II.B.2.b., bypass is prohibited, and the Commissioner may take enforcement action against a permittee for bypass, unless the following occur:
    - (A) Bypass was unavoidable to prevent loss of life, personal injury, or severe property damage.
    - (B) There were no feasible alternatives to the bypass, such as the use of auxiliary treatment facilities, retention of untreated wastes, or maintenance during normal periods of equipment down time. This condition is not satisfied if adequate back-up equipment should have been installed in the exercise of reasonable engineering judgment to prevent a bypass that occurred during normal periods of equipment downtime or preventive maintenance.
    - (C) The permittee submitted notices as required under Part II.B.2.c.

- (2) The Commissioner may approve an anticipated bypass, after considering its adverse effects, if the Commissioner determines that it will meet the conditions listed above in Part II.B.2.d.(1). The Commissioner may impose any conditions determined to be necessary to minimize any adverse effects.
- e. Bypasses that result in death or acute injury or illness to animals or humans must be reported in accordance with the “Spill Response and Reporting Requirements” in 327 IAC 2-6.1, including calling 888/233-7745 as soon as possible, but within two (2) hours of discovery. However, under 327 IAC 2-6.1-3(1), when the constituents of the bypass are regulated by this permit, and death or acute injury or illness to animals or humans does not occur, the reporting requirements of 327 IAC 2-6.1 do not apply.

3. Upset Conditions

Pursuant to 327 IAC 5-2-8(13):

- a. “Upset” means an exceptional incident in which there is unintentional and temporary noncompliance with technology-based permit effluent limitations because of factors beyond the reasonable control of the permittee. An upset does not include noncompliance to the extent caused by operational error, improperly designed treatment facilities, inadequate treatment facilities, lack of preventive maintenance, or careless or improper operation.
- b. An upset shall constitute an affirmative defense to an action brought for noncompliance with such technology-based permit effluent limitations if the requirements of Paragraph c of this section, are met.
- c. A permittee who wishes to establish the affirmative defense of upset shall demonstrate, through properly signed, contemporaneous operating logs or other relevant evidence, that:
  - (1) An upset occurred and the permittee has identified the specific cause(s) of the upset;
  - (2) The permitted facility was at the time being properly operated;
  - (3) The permittee complied with any remedial measures required under Part II.A.2; and

(4) The permittee submitted notice of the upset as required in the "Twenty-Four Hour Reporting Requirements," Part II.C.3, or 327 IAC 2-6.1, whichever is applicable. However, under 327 IAC 2-6.1-3(1), when the constituents of the discharge are regulated by this permit, and death or acute injury or illness to animals or humans does not occur, the reporting requirements of 327 IAC 2-6.1 do not apply.

d. In any enforcement proceeding, the permittee seeking to establish the occurrence of an upset has the burden of proof pursuant to 40 CFR 122.41(n)(4).

4. Removed Substances

Solids, sludges, filter backwash, or other pollutants removed from or resulting from treatment or control of wastewaters shall be disposed of in a manner such as to prevent any pollutant from such materials from entering waters of the State and to be in compliance with all Indiana statutes and regulations relative to liquid and/or solid waste disposal. The discharge of pollutants in treated wastewater is allowed in compliance with the applicable effluent limitations in Part I. of this permit.

C. REPORTING REQUIREMENTS

1. Planned Changes in Facility or Discharge

Pursuant to 327 IAC 5-2-8(11)(F), the permittee shall give notice to the Commissioner as soon as possible of any planned physical alterations or additions to the permitted facility. In this context, permitted facility refers to a point source discharge, not a wastewater treatment facility. Notice is required only when either of the following applies:

- a. The alteration or addition may meet one of the criteria for determining whether the facility is a new source as defined in 327 IAC 5-1.5.
- b. The alteration or addition could significantly change the nature of, or increase the quantity of, pollutants discharged. This notification applies to pollutants that are subject neither to effluent limitations in Part I.A. nor to notification requirements in Part II.C.9. of this permit.

Following such notice, the permit may be modified to revise existing pollutant limitations and/or to specify and limit any pollutants not previously limited.

2. Monitoring Reports

Pursuant to 327 IAC 5-2-8(10) and 327 IAC 5-2-13 through 15, monitoring results shall be reported at the intervals and in the form specified in “Monthly Reporting”, Part I.C.2.

3. Twenty-Four Hour Reporting Requirements

Pursuant to 327 IAC 5-2-8(11)(C), the permittee shall orally report to the Commissioner information on the following types of noncompliance within 24 hours from the time permittee becomes aware of such noncompliance. If the noncompliance meets the requirements of item b (Part II.C.3.b) or 327 IAC 2-6.1, then the report shall be made within those prescribed time frames. However, under 327 IAC 2-6.1-3(1), when the constituents of the discharge that is in noncompliance are regulated by this permit, and death or acute injury or illness to animals or humans does not occur, the reporting requirements of 327 IAC 2-6.1 do not apply.

- a. Any unanticipated bypass which exceeds any effluent limitation in the permit;
- b. Any noncompliance which may pose a significant danger to human health or the environment. Reports under this item shall be made as soon as the permittee becomes aware of the noncomplying circumstances; or
- c. Any upset (as defined in Part II.B.3 above) that causes an exceedance of any effluent limitation in the permit; or
- d. Violation of a maximum daily discharge limitation for any of the following toxic pollutants or hazardous substances: PCBs.

The permittee can make the oral reports by calling (317)232-8670 during regular business hours and asking for the Compliance Data Section or by calling (317) 233-7745 ((888)233-7745 toll free in Indiana) during non-business hours. A written submission shall also be provided within 5 days of the time the permittee becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and, if the noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce and eliminate the noncompliance and prevent its recurrence. The Commissioner may waive the written report on a case-by-case basis if the oral report has been received within 24 hours. Alternatively the permittee may submit a "Bypass/Overflow Report" (State Form 48373) or a "Noncompliance 24-Hour Notification Report" (State Form 52415), whichever is appropriate, to IDEM at (317) 232-8637 or [wwreports@idem.in.gov](mailto:wwreports@idem.in.gov). If a complete e-mail submittal is sent within 24 hours of the time that the permittee became aware of the occurrence, then the email report will satisfy both the oral and written reporting requirements.

4. Other Compliance/Noncompliance Reporting

Pursuant to 327 IAC 5-2-8(11)(D), the permittee shall report any instance of noncompliance not reported under the "Twenty-Four Hour Reporting Requirements" in Part II.C.3, or any compliance schedules at the time the pertinent Discharge Monitoring Report is submitted. The report shall contain the information specified in Part II.C.3;

The permittee shall also give advance notice to the Commissioner of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements; and

All reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this permit shall be submitted no later than 14 days following each schedule date.

5. Other Information

Pursuant to 327 IAC 5-2-8(11)(E), where the permittee becomes aware of a failure to submit any relevant facts or submitted incorrect information in a permit application or in any report, the permittee shall promptly submit such facts or corrected information to the Commissioner.

6. Signatory Requirements

Pursuant to 327 IAC 5-2-22 and 327 IAC 5-2-8(15):

a. All reports required by the permit and other information requested by the Commissioner shall be signed and certified by a person described below or by a duly authorized representative of that person:

- (1) For a corporation: by a responsible corporate officer. A “responsible corporate officer” means either of the following:
  - (A) A president, secretary, treasurer, any vice president of the corporation in charge of a principal business function, or any other person who performs similar policymaking or decision-making functions for the corporation; or
  - (B) The manager of one (1) or more manufacturing, production, or operating facilities provided the manager is authorized to make management decisions that govern the operation of the regulated facility including having the explicit or implicit duty to make major capital investment recommendations, and initiating and directing other comprehensive measures to assure long-term environmental compliance with environmental laws and regulations; the manager can ensure that the necessary systems are established or actions taken to gather complete and accurate information for permit application requirements; and where authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures.
- (2) For a partnership or sole proprietorship: by a general partner or the proprietor, respectively; or
- (3) For a Federal, State, or local governmental body or any agency or political subdivision thereof: by either a principal executive officer or ranking elected official.

b. A person is a duly authorized representative only if:

- (1) The authorization is made in writing by a person described above.

(2) The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity, such as the position of plant manager, operator of a well or a well field, superintendent, or position of equivalent responsibility. (A duly authorized representative may thus be either a named individual or any individual occupying a named position.); and

(3) The authorization is submitted to the Commissioner.

c. **Electronic Signatures:** If documents described in this section are submitted electronically by or on behalf of the NPDES-regulated facility, any person providing the electronic signature for such documents shall meet all relevant requirements of this section, and shall ensure that all of the relevant requirements of 40 CFR part 3 (including, in all cases, subpart D to part 3) (Cross-Media Electronic Reporting) and 40 CFR part 127 (NPDES Electronic Reporting Requirements) are met for that submission.

d. **Certification:** Any person signing a document identified under Part II.C.6., shall make the following certification:

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

7. Availability of Reports

Except for data determined to be confidential under 327 IAC 12.1, all reports prepared in accordance with the terms of this permit shall be available for public inspection at the offices of the Indiana Department of Environmental Management and the Regional Administrator. As required by the Clean Water Act, permit applications, permits, and effluent data shall not be considered confidential.

8. Penalties for Falsification of Reports

IC 13-30 and 327 IAC 5-2-8(15) provides that any person who knowingly makes any false statement, representation, or certification in any record or other document submitted or required to be maintained under this permit, including monitoring reports or reports of compliance, shall, upon conviction, be punished by a fine of not more than \$10,000 per violation, or by imprisonment for not more than 180 days per violation, or by both.

9. Changes in Discharge of Toxic Substances

Pursuant to 327 IAC 5-2-9, the permittee shall notify the Commissioner as soon as it knows or has reason to know:

- a. That any activity has occurred or will occur which would result in the discharge of any toxic pollutant that is not limited in the permit if that discharge will exceed the highest of the following notification levels.
  - (1) One hundred micrograms per liter (100 µg/l);
  - (2) Two hundred micrograms per liter (200 µg/l) for acrolein and acrylonitrile; five hundred micrograms per liter (500 µg/l) for 2,4-dinitrophenol and 2-methyl-4,6-dinitrophenol; and one milligram per liter (1 mg/l) for antimony;
  - (3) Five (5) times the maximum concentration value reported for that pollutant in the permit application in accordance with 40 CFR 122.21(g)(7); or
  - (4) A notification level established by the Commissioner on a case-by-case basis, either at the Commissioner's own initiative or upon a petition by the permittee. This notification level may exceed the level specified in subdivisions (1), (2), or (3) but may not exceed the level which can be achieved by the technology-based treatment requirements applicable to the permittee under the CWA (see 327 IAC 5-5-2).
- b. That it has begun or expects to begin to use or manufacture, as an intermediate or final product or byproduct, any toxic pollutant that was not reported in the permit application under 40 CFR 122.21(g)(9). However, this subsection b. does not apply to the permittee's use or manufacture of a toxic pollutant solely under research or laboratory conditions.

10. Future Electronic Reporting Requirements

IDEM is currently developing the technology and infrastructure necessary to allow compliance with the EPA Phase 2 e-reporting requirements per 40 CFR 127.16 and to allow electronic reporting of applications, notices, plans, reports, and other information not covered by the federal e-reporting regulations. IDEM will notify the permittee when IDEM's e-reporting system is ready for use for one or more applications, notices, plans, reports, or other information. This IDEM notice will identify the specific applications, notices, plans, reports, or other information that are to be submitted electronically and the permittee will be required to use the IDEM electronic reporting system to submit the identified application(s), notice(s), plan(s), report(s), or other information. See Part I.C.2. of this permit for the current electronic reporting requirements for the submittal of monthly monitoring reports such as the Discharge Monitoring Report (DMR) and the Monthly Monitoring Report (MMR).



**National Pollutant Discharge Elimination System**  
**Briefing Memo for**  
**General Motors LLC – GM Remediation**  
**Draft: February 2025**  
**Final: TBA**

**Indiana Department of Environmental Management**

100 North Senate Avenue  
 Indianapolis, Indiana 46204  
 (317) 232-8603  
 Toll Free (800) 451-6027  
[www.idem.IN.gov](http://www.idem.IN.gov)

<b>Permittee:</b>	General Motors LLC 30400 Van Dyke Avenue Warren, Michigan 48093
<b>Existing Permit Information:</b>	Permit Number: IN0064424 Expiration Date: January 31, 2026
<b>Facility Contact:</b>	Edward Peterson, Remediation Project Manager (313) 506-9465, ed.e.oeterson@gm.com
<b>Facility Location:</b>	105 GM Drive Bedford, IN 47421 Lawrence County
<b>Receiving Stream(s):</b>	Unnamed tributary to Pleasant Run
<b>GLI/Non-GLI:</b>	Non-GLI
<b>Proposed Permit Action:</b>	Renew
<b>Date Application Received:</b>	September 22, 2025
<b>Source Category:</b>	NPDES Minor – Industrial
<b>Permit Writer:</b>	Riley Marshall (317) 234-3568, remarsha@idem.in.gov

## Table of Contents

<b>1.0 Introduction .....</b>	<b>3</b>
<b>2.0 Facility description.....</b>	<b>3</b>
2.1 General.....	3
2.2 Outfall Locations.....	6
2.3 Descriptions of Outfalls and Wastewater Treatment.....	6
2.4 Changes in Operation.....	10
2.5 Facility Stormwater .....	10
<b>3.0 Permit History .....</b>	<b>10</b>
3.1 Compliance History .....	10
<b>4.0 LOCATION OF DISCHARGE/RECEIVING WATER USE DESIGNATION....</b>	<b>11</b>
4.1 Total Maximum Daily Loads (TMDLs) .....	13
<b>5.0 Permit limitations .....</b>	<b>13</b>
5.1 Technology-Based Effluent Limits (TBELs) .....	13
5.2 Water Quality-Based Effluent Limits (WQBELs) .....	14
5.3 Effluent Limitations and Monitoring Requirements by Outfall .....	14
5.4 Whole Effluent Toxicity (WET) Testing .....	16
5.5 Antibacksliding.....	16
5.6 Antidegradation .....	16
5.7 Stormwater .....	17
5.8 Water Treatment Additives .....	17
<b>6.0 Permit Draft Discussion.....</b>	<b>18</b>
6.1 Discharge Limitations, Monitoring Conditions and Rationale.....	18
6.2 Schedule of Compliance.....	18
6.3 Special Conditions and Other Permit Requirements .....	18
6.4 Spill Response and Reporting Requirement.....	19
6.5 Permit Processing/Public Comment .....	19

## 1.0 INTRODUCTION

---

The Indiana Department of Environmental Management (IDEM) received a National Pollutant Discharge Elimination System (NPDES) Permit application from General Motors LLC - GM Remediation on September 22, 2025.

In accordance with 327 IAC 5-2-6(a), the current five-year permit was issued with an effective date of February 1, 2021. A five year permit is proposed in accordance with 327 IAC 5-2-6(a).

The Federal Water Pollution Control Act (more commonly known as the Clean Water Act), as amended, (Title 33 of the United States Code (U.S.C.) Section 1251 *et seq.*), requires an NPDES permit for the discharge of pollutants into surface waters. Furthermore, Indiana law requires a permit to control or limit the discharge of any contaminants into state waters or into a publicly owned treatment works. This proposed permit action by IDEM complies with and implements these federal and state requirements.

In accordance with Title 40 of the Code of Federal Regulations (CFR) Section 124.7, as well as Title 327 of the Indiana Administrative Code (IAC) 327 Article 5-3-7, a Statement of Basis, or Briefing Memo, is required for certain NPDES permits. This document fulfills the requirements established in these regulations. This Briefing Memo was prepared in order to document the factors considered in the development of NPDES Permit effluent limitations. The technical basis for the Briefing Memo may consist of evaluations of promulgated effluent guidelines, existing effluent quality, receiving water conditions, Indiana water quality standards-based wasteload allocations, and other information available to IDEM. Decisions to award variances to Water Quality Standards or promulgated effluent guidelines are justified in the Briefing Memo where necessary.

## 2.0 FACILITY DESCRIPTION

---

### 2.1 General

General Motors LLC- GM Remediation is classified under NAICS Code 562910 – Remediation Services. The facility treats PCB impacted groundwater under RCRA Corrective Action order 05-2014-0011 that it entered into with U.S. EPA.

GM and USEPA entered an Administrative Order on Consent (AOC) effective August 2, 2014 (Docket No. RCRA 005 2014 0011) for RCRA Corrective Action. Work to be performed under the AOC includes collection of groundwater to provide horizontal control of groundwater transport and provide treatment for the collected groundwater. Groundwater collected from the interim site source control system (Wet Wells #1, #2, and #3) and the perimeter groundwater collection trench (Wet Well #4) is treated through the Groundwater Treatment Plant (GWTP), which is the subject of this NPDES permit renewal.

Groundwater may be collected from the Gravel Underdrain System (GUS) constructed beneath the TSCA Vault as part the overall groundwater remediation approach. In addition to the groundwater treatment, the GWTP also treats small amounts of leachate generated from the onsite TSCA Vault. Quantities of leachate collected annually continue to diminish over time. Vault operation and monitoring information is summarized in annual reports provided to the USEPA.

In addition to the groundwater described above, the GWTP treats relatively small volumes of other remediation waters such as decontamination water, water from construction/excavation activities and purge water from monitoring or recovery well development and testing. This remediation water is generated as a result of GM's obligations under the 2014 Administrative Order on Consent and oversight of U.S. EPA and IDEM. Such remediation water is generated intermittently, primarily onsite, but occasionally is generated during offsite investigations and remediation work.

Stormwater may be treated through the GWTP to prevent an overflow of untreated stormwater from the stormwater retention pond to Bailey's Branch Creek. To the extent that the GWTP has capacity, stormwater from the retention pond will be pumped to the equalization tank of the GWTP where the stormwater would subsequently be treated through the GWTP prior to discharge via Outfall 004. A map showing the location of the facility has been included as Figure 1 below.

Figure 1: Facility Location

# GM Bedford OUTFALL LOCATION MAP



Outfall 004 Location:  
38° 52' 49.08" N, -86° 28' 46.92" W



0 0.05 0.1 0.2 Miles

105 GM Drive  
Bedford, IN – Lawrence County

## 2.2 Outfall Locations

Outfall 004	Latitude: 38° 52' 49.08"
	Longitude: -86° 28' 46.92"

## 2.3 Descriptions of Outfalls and Wastewater Treatment

The GWTP removes low level polychlorinated biphenyls (PCBs) from groundwater extracted from the groundwater collection system. The GWTP is operated and discharges to an unnamed tributary to Pleasant Run via Outfall 004. The GWTP treatment process includes:

- Above grade equalization.
- Pre-Filtration (self-cleaning screen filter system augmented with chemical flocculation (as needed). The current design includes Orival screen filtration. Alternative brand particulate filters may be employed in the future).
- Granular Activated Carbon (GAC) filtration.

The GWTP treatment system has an overall hydraulic capacity of 1,000 gpm. The system is automated such that as the levels in the equalization (EQ) tank rises to a pre-specified level, the treatment train will be brought online. Sources of water to the EQ tank include; ground water from the perimeter groundwater collection system (including site control wells), leachate from the on-site TSCA vault, rinse water for building maintenance (no detergents or additives), backwash from Orival filters (explained below) and backwash from GAC Units. In addition, other remediation waters such as water generated from well development and testing, decontamination water associated with remedial investigations and activities, and the installation, operation and maintenance of remediation collection and treatment equipment is treated in the GWTP. In the event of an emergency, water from the EQ tank will overflow to the storm pond for treatment prior to discharge.

The EQ tank is a 250,000 gallon, opened topped, glass fused steel tank (19 ft high x 48 ft diameter) which receives raw water for storage prior to treatment. The EQ tank is located outside and south of the GWTP building, situated within a concrete containment. The tank is equipped with an overflow line that drains to the storm water pond for use in the case of an emergency. The water surface in the EQ tank is covered with hexagonal floating tiles. Water is transferred from the EQ tank to the treatment system by influent pumps located on a pumping skid inside the GWTP building. These pumps are redundant, parallel influent feed pumps rated at a capacity of 1000 gpm each. The influent flowrate is set by the operator and controlled by the influent flow meter positioned downstream of the pumps. The level within the EQ tank is continuously monitored by a pressure transducer. The system is configured such that if the level in the EQ tank drops below a set value, the pumps will shut off.

Following equalization, PCB impacted groundwater is directed to the filter skid for removal of particulates. If needed, the system is configured to allow for coagulant addition and mixing via an in-line pipe flocculator. Coagulant is dosed via redundant dosing pumps, adjusted by variable frequency drives and paced with the influent flowrate to achieve a concentration dosing setpoint.

After fully mixed, water is filtered through the primary pair of Orival self-cleaning, 100 µm screen filters. Each filter can accommodate a maximum flow of 660 gpm. In these filters, particles are filtered through a metal screen. As the filter run time progresses, the accumulation of particles creates a cake which further aids in particle removal. After the differential pressure between the inlet and outlet reaches a setpoint, an automatic, self-cleaning rinse cycle is initiated. During the rinse cycle, the filters will continue to operate. Filtered water from the primary filter pairs is filtered by a secondary set of self-cleaning 50 µm filters. These filters are configured in the same way as the primary filters and operate in the same manner. The filter size for both the primary and secondary filter pairs is variable based on the turbidity of the water.

Rinsing occurs for each filter sequentially approximately every 15 minutes. During this cycle, the rinse valve for the filter being rinsed is opened. The spent rinse water discharges to a purge tank at atmospheric pressure, which causes a large pressure differential to establish between the filter body and the backwash piping. This causes water within the filter body to flow with high velocity through the internal cleaning mechanism arms, which in turn vacuums particles stuck on the filter screen. In addition, the movement of water at high velocity through the 'hydraulic' motor causes the internal cleaning mechanism to rotate, which aids in cleaning the metal screen.

Rinse water and accumulated solids from rinse cycle flows to a purge tank, vented to atmosphere. The rinse water and solids are periodically pumped out through bag filters and back into the equalization tank. The bag filters are operated such that one is in operation while the other is in standby to facilitate change out of the spent filter bags. Filter bags will be properly disposed at an off-site facility.

Following filtration, the water is transferred to the GAC system. The system includes six (6) GAC pressure contactors that are operated in three treatment trains, with a lead-lag configuration and under pressurized conditions. The GAC system consists of triplex parallel 144" x 72" lead vessels followed by triplex parallel 144" x 72" lag vessels with 400 ft<sup>3</sup> of GAC in each, for a 6minute EBCT. Two trains are capable of treating the full 1,000 gpm flow with one train off-line for backwashing. This setup allows one train to be taken out of service for backwashing without disrupting treatment flow.

For each train, water enters the lead contactor and then flow into the lag contactor. The lead/lag arrangement is necessary to ensure PCB's are not released once the lead train is fully exhausted and effluent quality is safe guarded in the event that contaminant breakthrough occurs in one of the lead contactors. Moreover, the configuration of lead and lag GAC contactors can be reversed – once the lead train is exhausted it can be changed and reoriented as the lag train. Each train is able to accommodate half of the design flow, such that one train may be offline for backwashing. During normal operation, at least two trains will be in service and loaded equally, the third train brought on line as needed to accommodate influent flowrates. The flowrate of the GAC skid influent stream is automatically adjusted via a flow control valve for each skid to ensure each skid is loaded equally. Water flows through the GAC contactors, and into the system effluent tank.

Backwashing of the GAC contactors is automatic and initiated on the basis of either operational time (i.e. how long the contactor has been in service) or at the moment the differential pressure between the influent and effluent of the contact reaches a prescribed setpoint. During a backwash procedure a number of steps take place: 1) Expanded Bed Wash 2) GAC Settling and 3) Rinse.

During step 1 of the backwashing procedure, the GAC contactor is isolated from the influent header and the backwash water inlet and outlet valves are opened, allowing clean water from the effluent tank to be pumped through to bottom of the GAC contactor, up through the top. During this phase, the bed media is fluidized allowing solids accumulated on the GAC media to be cleaned out and pressure drop to return to normal.

Backwash water is pumped into the EQ tank where the water is treated through the complete system. After the Expanded Bed Wash Phase, the GAC contactor is isolated by closing applicable valves. During this period, the GAC media is allowed to settle by gravity. The time for this period is set by the operator.


Once the settling operation is complete in both GAC contactors, the rinse period is initiated. During this phase, the contactor inlet valve and backwash waste valves are opened, allowing inlet water to flow to the valve and be recycled back to the EQ tank for treatment.

The treated water is collected in a 100,000 gallon open top glass fused steel tank, located outside and to the south of the GWTP building. Connections on this tank transfer treated water for GAC backwashing (including rinsing and hose connections) and to GWTP effluent discharge at Outfall 004. The water surface in the tank is covered with hexagonal floating tiles.

The GWTP treatment system is controlled by an automated control system. The main controls are located in a control room within the GWTP to monitor the system. The motor control center is located in a separate electrical/motor control center room. Controls include a SCADA system such that critical parameters related to the system operation are recorded and trended to assist operations staff and predict system performance.

The wastewater treatment system has an average discharge of approximately 0.084 MGD. A Water Balance Diagram has been included as Figure 2.

Figure 2: Water Balance Diagram

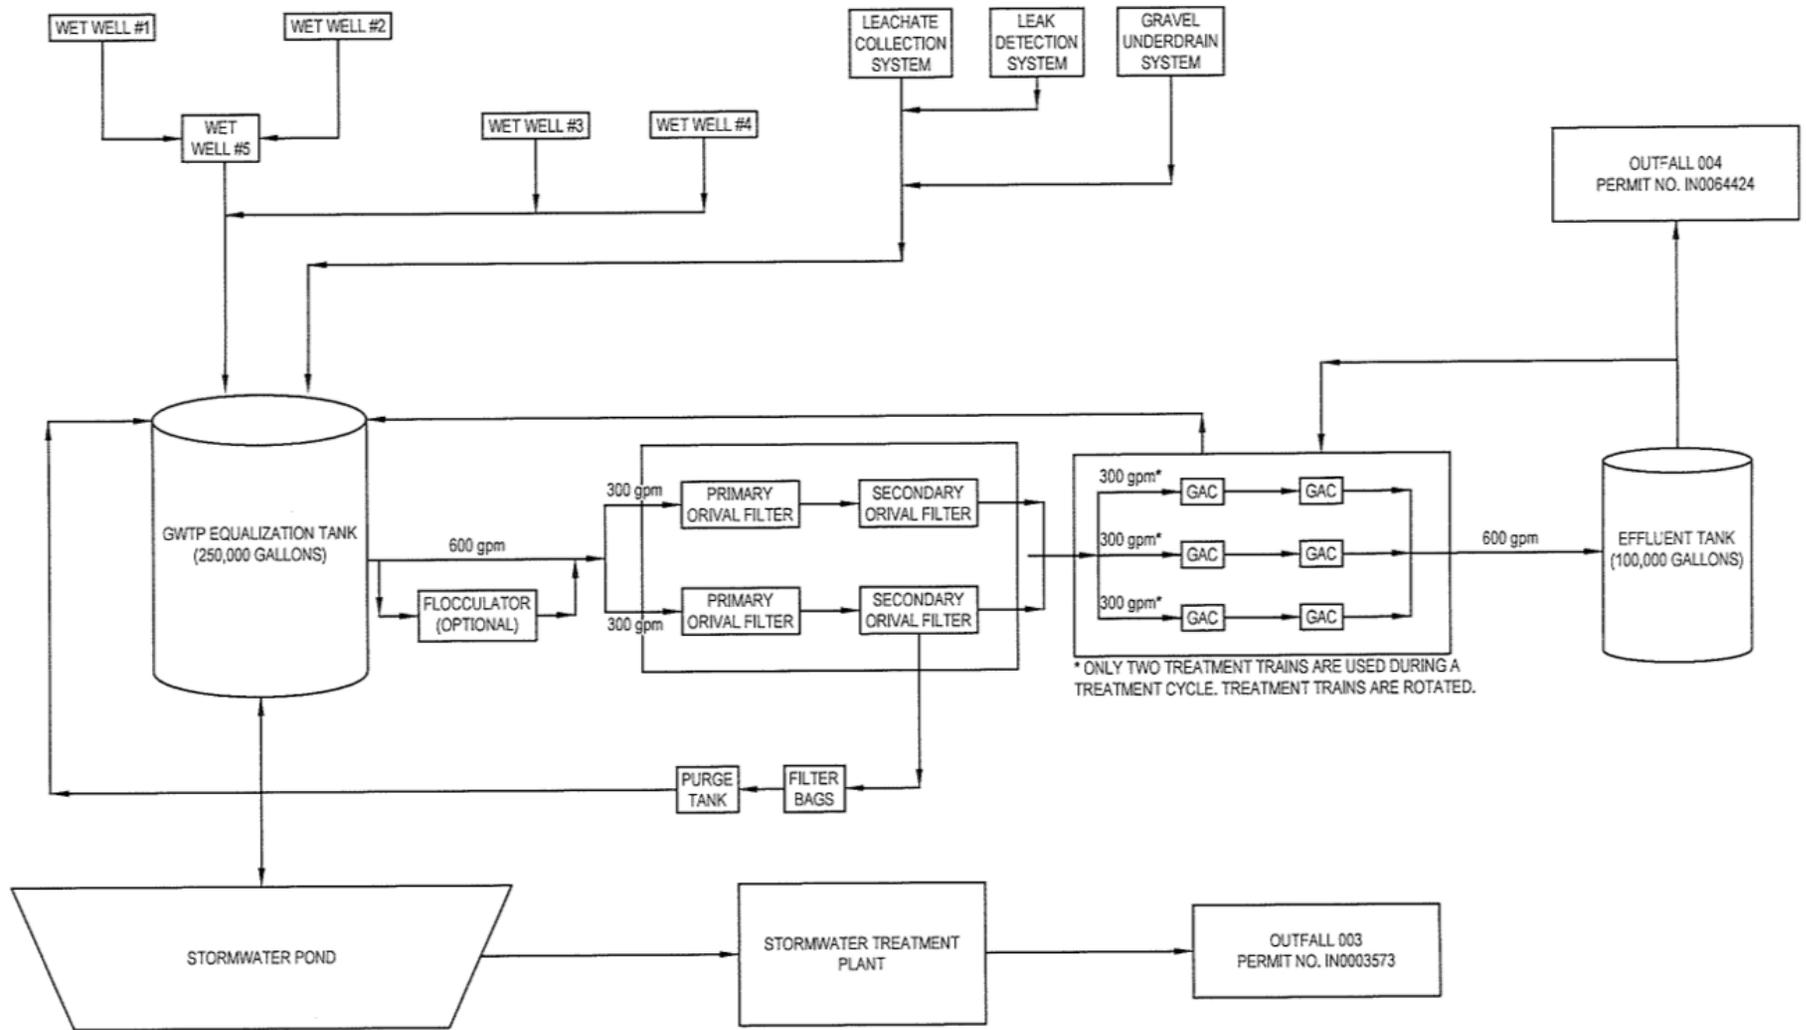

Outfall 004: The average daily discharge from Outfall 004 to the unnamed tributary to Pleasant Run is 0.084 MGD. The design flow (highest monthly average) based on the most recent 2 years of data is 0.094 MGD.

The permittee shall have the wastewater treatment facilities under the responsible charge of an operator certified by the Commissioner in a classification corresponding to the classification of the wastewater treatment plant as required by IC 13-18-11-11 and 327 IAC 5-23-6.

IDEM has given the permittee a Class D industrial wastewater treatment plant classification based on the use of activated carbon and discharge of up to 1.44 MGD.

## **2.4 Changes in Operation**

In the permit application, no changes in operation were identified as occurring since the previous permit renewal.

## **2.5 Facility Stormwater**

GM has previously requested to have the ability to treat stormwater from the on-site retention pond in an emergency to prevent an overflow of untreated stormwater from the retention pond. The stormwater is normally discharged through Outfall 003 of NPDES Permit No. IN0003573. In the event of an emergency at the existing stormwater plant, and to the extent that the GWTP has capacity, stormwater from the retention pond will be pumped to the equalization tank of the GWTP for treatment and discharge through Outfall 004.

## **3.0 PERMIT HISTORY**

---

### **3.1 Compliance History**

A review of this facility's discharge monitoring data was conducted for compliance verification. This review indicates the following permit limitation violations at Outfall 004 between January 2024 and February 2026; 1 violation for Total Flow in April of 2024. There are no pending or current enforcement actions regarding this NPDES permit.


#### **4.0 LOCATION OF DISCHARGE/RECEIVING WATER USE DESIGNATION**

---

The receiving stream for Outfall 004 is an unnamed tributary to Pleasant Run. The  $Q_{7,10}$  low flow value of the unnamed tributary is 0.0 cfs and shall be capable of supporting a well-balanced, warm water aquatic community and full body contact recreation in accordance with 327 IAC 2-1-3.

The permittee discharges to a waterbody that has been identified as a water of the state that is not within the Great Lakes system. Therefore it is subject to NPDES requirements specific to dischargers not discharging to waters within the Great Lakes system under 327 IAC 2-1 and 327 IAC 5-2-11.1. These rules contain applicable water quality standards and the procedures to calculate and incorporate water quality-based effluent limitations. A Site Map has been included as Figure 3.

**Figure 3: Site Map**

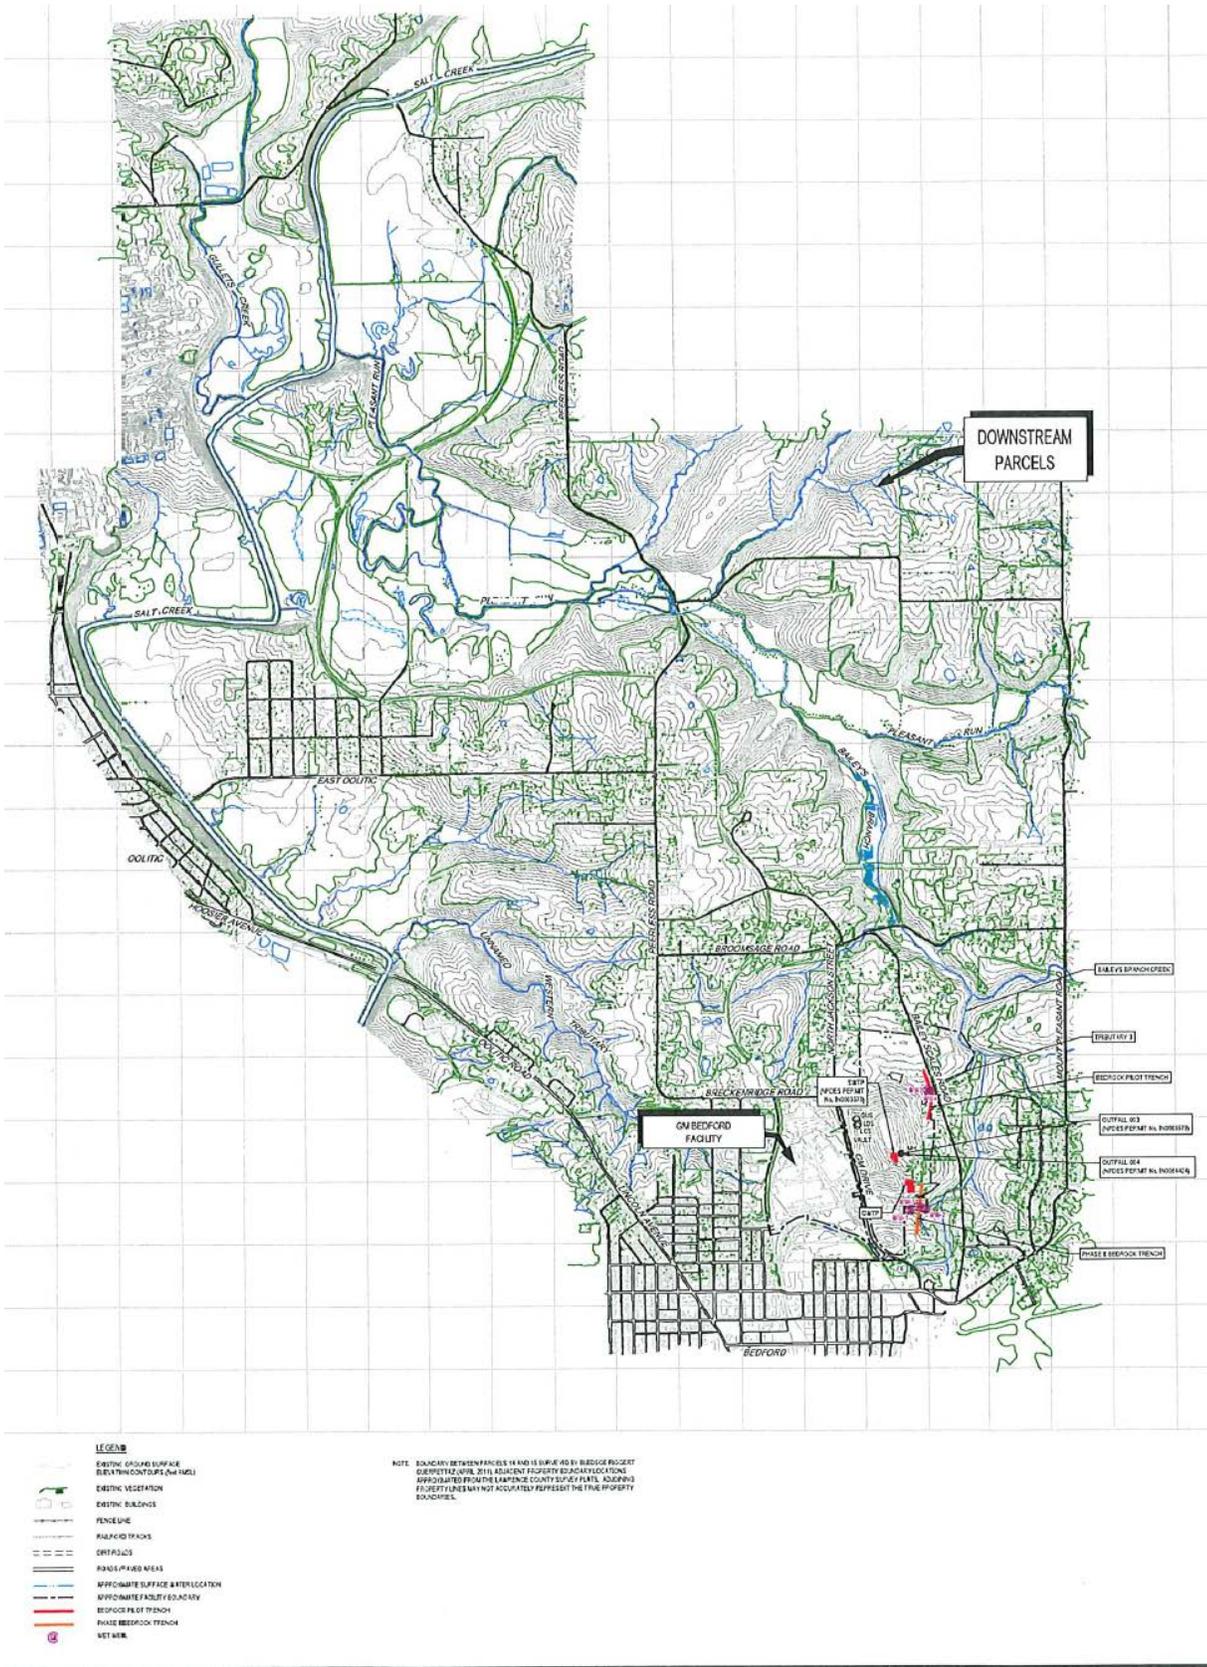

## 4.1 Total Maximum Daily Loads (TMDLs)

Section 303(d) of the Clean Water Act requires states to identify waters, through their Section 305(b) water quality assessments, that do not or are not expected to meet applicable water quality standards with federal technology based standards alone. States are also required to develop a priority ranking for these waters taking into account the severity of the pollution and the designated uses of the waters. Once this listing and ranking of impaired waters is completed, the states are required to develop TMDLs for these waters in order to achieve compliance with the water quality standards. Indiana's 2024 303(d) List of Impaired Waters was developed in accordance with Indiana's Water Quality Assessment and 303(d) Listing Methodology for Waterbody Impairments and Total Maximum Daily Load Development for the 2024 Cycle.

The unnamed tributary to Pleasant Run, Assessment-Unit INW0886\_Y1008, HUC 051202080806 is not on the 2024 303(d) list for impairments; however, Pleasant Run downstream of the discharge is on the 2024 303(d) list for PCBs in fish tissue. A TMDL for the unnamed tributary to Pleasant Run has been developed for E. coli. The Lower Salt Creek Watershed TMDL was approved by U.S. EPA Region 5 on September 10, 2018 and addressed 43 E. coli impairments. General Motors LLC – GM Remediation was not identified in the report.

## 5.0 PERMIT LIMITATIONS

---

### 5.1 Technology-Based Effluent Limits (TBELs)

EPA develops effluent limitations guidelines (ELGs) for industrial and commercial activities as required by the Clean Water Act (CWA). ELGs are technology-based effluent limits (TBELs). TBELs established pursuant to sections 301(b), 304, and 306 of the CWA represent the minimum level of treatment for industrial point sources that must be included in an NPDES permit (327 IAC 5-5-2(a)). The federal effluent guidelines and standards are located at 40 CFR 403 through 471, inclusive, and are incorporated into Indiana law at 327 IAC 5-2-1.5. In Indiana, NPDES permits are required to ensure compliance with these federal ELGs under 327 IAC 5-2-10(a)(1), 327 IAC 5-2-10(a)(2), and 327 IAC 5-5-2.

In the absence of ELGs for a particular process or parameter, TBELs can also be established on a case-by-case basis for a particular process or parameter using best professional judgment (BPJ) in accordance with 327 IAC 5-5-2 and 5-2-10 (see also 40 CFR 122.44 and 125.3, and Section 402(a)(1) of the CWA).

## **BEST PROFESSIONAL JUDGEMENT (BPJ)**

EPA develops effluent limitation guidelines (ELGs) for existing industrial and commercial activities as directed in the 1972 amendments of the Clean Water Act. The federal effluent limitation guidelines and standards are located at 40 CFR 403 through 471, inclusive, and are incorporated into Indiana law at 327 IAC 5-2-1.5. In Indiana, NPDES permits are required to ensure compliance with these federal effluent limitation guidelines and standards under 327 IAC 5-2-10(a)(1), 327 IAC 5-2-10(a)(2), and 327 IAC 5-5-2. ELGs are technology-based effluent limitations (TBELs). The intent of a TBEL is to require a minimum level of treatment for industrial point sources based on currently available treatment technologies. Where EPA has not yet developed guidelines for a particular industry, best professional judgment (BPJ) may be used to develop case-by-case technology-based permit limitations under 327 IAC 5-5-2 and 5-210 (see also 40 CFR 122.44 and 125.3, and Section 402(a)(1) of the Clean Water Act).

ELGs have not yet been developed specifically for this type of discharge. Therefore, as provided by law, IDEM may establish TBELs in the proposed permit utilizing BPJ to meet the requirements of Best Conventional Pollutant Control Technology and Best Available Technology Economically Achievable (BCT/BAT).

### **5.2 Water Quality-Based Effluent Limits (WQBELs)**

WQBELs are designed to be protective of the beneficial uses of the receiving water and are independent of the available treatment technology. The WQBELs for this facility are based on water quality criteria in 327 IAC 2-1-6 or developed under the procedures described in 327 IAC 2-1-8.2 through 8.7 and 327 IAC 2-1-8.9, and implementation procedures in 327 IAC 5. Limitations are required for any parameter which has the reasonable potential to exceed a water quality criterion as determined using the procedures under 327 IAC 5-2-11.1(h).

### **5.3 Effluent Limitations and Monitoring Requirements by Outfall**

Under 327 IAC 5-2-10(a) (see also 40 CFR 122.44), NPDES permit requirements are technology-based effluent limitations and standards (including TBELs based on federal effluent limitations guidelines or developed on a case-by-case basis using BPJ, where applicable), water quality standards-based, or based on other more stringent requirements. The decision to limit or monitor the parameters contained in this permit is based on information contained in the permittee's NPDES application and other available information relating to the facility and the receiving waterbody as well as the applicable federal effluent limitations guidelines. In addition, when renewing a permit, the existing permit limits, the antibacksliding requirements under 327 IAC 5-2-10(a)(11), and the antidegradation requirements under 327 IAC 2-1.3 must be considered.

### 5.3.1 All External Outfalls (004)

#### ***Narrative Water Quality Based Limits***

The narrative water quality criteria contained under 327 IAC 2-1-6(a)(1) and (2) have been included in this permit to ensure that these minimum water quality conditions are met.

#### ***Flow***

The effluent flow is to be monitored in accordance with 327 IAC 5-2-13(a)(2).

### 5.3.2 Outfall (004)

#### ***pH***

Discharges to waters of the state are limited to the range of 6.0-9.0 s.u., in accordance with 327 IAC 2-1-6(b)(2).

#### ***Oil and Grease (O & G)***

The O & G limitation of 10.0 mg/l Daily Maximum has been retained from the previous permit. This limit is considered sufficient to ensure compliance with narrative water quality criteria in 327 IAC 2-1-6(a)(1)(C) which prohibits oil or other substances in amounts sufficient to produce color, visible sheen, odor, or other conditions in such a degree as to create a nuisance.

#### ***Total Suspended Solids (TSS)***

TSS is a regulated conventional pollutant and is limited in the NPDES permit to ensure adequate wastewater treatment is provided and the narrative water quality criteria will be protected. TSS is a parameter used to protect the existing and designated uses by preventing the discharge from having putrescent, or otherwise objectionable deposits, unsightly or deleterious deposits, color or other conditions in such a degree as to create a nuisance. TSS technology-based effluent limits are always designed to protect and maintain the existing uses. The proposed monitoring requirements and effluent limitations are based upon best professional judgment (BPJ) of the technology and corresponding effluent limitations equivalent to the Best Conventional Pollutant Control Technology (BCT), and were developed in accordance with the technology-based treatment standards requirements of 327 IAC 5-5-2(b). These limits have been retained from the previous permit.

#### ***Polychlorinated Biphenyls (PCBs)***

The effluent limitations for PCBs were developed based on the Indiana Water Quality standards in accordance with 327 IAC 2-1-6. The effluent limitations of 0.0019 ug/l Daily Maximum and 0.00079 ug/l Monthly Average and monitoring requirements for PCBs were established in the permit issued in January of 2016 and have been retained.

## **5.4 Whole Effluent Toxicity (WET) Testing**

The permit does not contain a requirement to conduct whole effluent toxicity (WET) tests.

## **5.5 Antibacksliding**

Indiana's prohibitions on backsliding under 327 IAC 5-2-10(a)(11) are applicable to BPJ case-by-case technology-based effluent limitations, when proposed to be increased based on subsequently promulgated effluent guidelines under Section 304(b) of the CWA, and limitations based on Indiana water quality standards or treatment standards (327 IAC 5-10). Prohibitions on other types of backsliding (e.g., backsliding from limitations derived from effluent guidelines, from existing case-by-case limitations to new case-by-case limitations, and from conditions such as monitoring requirements that are not effluent limitations) are covered under federal regulation at 40 CFR 122.44(l)(1).

Under 327 IAC 5-2-10(a)(11), unless an exception under 327 IAC 5-2-10(a)(11)(B) applies, a permit may not be renewed, reissued or modified to contain effluent limitations that are less stringent than the comparable effluent limitations in the previous permit. For effluent limitations based on Indiana water quality or treatment standards, less stringent effluent limitations may also be allowed if they are in compliance with Section 303(d)(4) of the CWA. Under 40 CFR 122.44(l)(1), a permit may not be renewed or reissued to contain less stringent interim effluent limitations, standards or conditions than the final effluent limitations, standards or conditions in the previous permit unless the circumstances on which the previous permit was based have materially and substantially changed since the time the permit was issued and would constitute cause for permit modification or revocation and reissuance under 40 CFR 122.62.

None of the limits calculated as part of this permit renewal are less stringent than the comparable effluent limitations in the previous permit, therefore, backsliding is not an issue in accordance with 327 IAC 5-2-10(a)(11) and 40 CFR 122.44(l)(1).

## **5.6 Antidegradation**

Indiana's Antidegradation Standards and Implementation procedures are outlined in 327 IAC 2-1.3. The antidegradation standards established by 327 IAC 2-1.3-3 apply to all surface waters of the state. The permittee is prohibited from undertaking any deliberate action that would result in a new or increased discharge of a bioaccumulative chemical of concern (BCC) or a new or increased permit limit for a regulated pollutant that is not a BCC unless information is submitted to the commissioner demonstrating that the proposed new or increased discharge will not cause a significant lowering of water quality, or an antidegradation demonstration submitted and approved in accordance 327 IAC 2-1.3-5 and 2-1.3-6.

The NPDES permit does not propose to establish a new or increased loading of a regulated pollutant; therefore, the Antidegradation Implementation Procedures in 327 IAC 2-1.3-5 and 2-1.3-6 do not apply to the permitted discharge.

## 5.7 Stormwater

GM has previously requested to have the ability to treat stormwater from the on-site retention pond in an emergency to prevent overflow of untreated stormwater from the retention pond. The stormwater is normally discharged through Outfall 003 of NPDES Permit No. IN0003573. In the event of an emergency at the existing stormwater plant, and to the extent that the GWTP has capacity, stormwater from the retention pond will be pumped to the equalization tank of the GWTP for treatment and discharge through Outfall 004.

## 5.8 Water Treatment Additives

In the event that changes are to be made in the use of water treatment additives that could significantly change the nature of, or increase the discharge concentration of any of the additives contributing to an outfall governed under the permit, the permittee must apply for and obtain approval from IDEM prior to such discharge. Discharges of any such additives must meet Indiana water quality standards. The permittee must apply for permission to use water treatment additives by completing and submitting State Form 50000 (Application for Approval to Use Water Treatment Additives) available at: <https://www.in.gov/idem/forms/idem-agency-forms/> and submitting any needed supplemental information. In the review and approval process, IDEM determines, based on the information submitted with the application, whether the use of any new or changed water treatment additives/chemicals or dosage rates could potentially cause the discharge from any permitted outfall to cause chronic or acute toxicity in the receiving water.

The authority for this requirement can be found under one or more of the following: 327 IAC 5-2-8(11)(B), which generally requires advance notice of any planned changes in the permitted facility, any activity, or other circumstances that the permittee has reason to believe may result in noncompliance with permit requirements; 327 IAC 5-2-8(11)(F)(ii), which generally requires notice as soon as possible of any planned physical alterations or additions to the permitted facility if the alteration or addition could significantly change the nature of, or increase the quantity of, pollutants discharged; and 327 IAC 5-2-9(2) which generally requires notice as soon as the discharger knows or has reason to know that the discharger has begun or expects to begin to use or manufacture, as an intermediate or final product or byproduct, any toxic pollutant that was not reported in the permit application.

The following is a list of water treatment additives currently approved for use at the facility:

<u>Supplier</u>	<u>WTA</u>	<u>Outfall</u>	<u>Purpose</u>
ChemTreat	P891L	004	Coagulant

## 6.0 PERMIT DRAFT DISCUSSION

---

### 6.1 Discharge Limitations, Monitoring Conditions and Rationale

The proposed final effluent limitations are based on the more stringent of the Indiana water quality-based effluent limitations (WQBELs), technology-based effluent limitations (TBELs), or approved total maximum daily loads (TMDLs) and NPDES regulations as appropriate for each regulated outfall. Section 5.3 of this document explains the rationale for the effluent limitations at each Outfall.

Analytical and sampling methods used shall conform to the version of 40 CFR 136 as referenced in 327 IAC 5-2-13(d)(1) and 327 IAC 5-2-1.5. Nothing has changed to warrant modifying the monitoring conditions.

#### Outfall 004:

Parameter	Monthly Average	Daily Maximum	Units	Minimum Frequency	Sample Type
Flow	Report	Report	MGD	5 X Weekly	24-Hour Total
Oil and Grease	----	10	mg/l	1 X Quarterly	Grab
TSS	10	15	mg/l	1 X Monthly	Grab
PCBs	0.00079	0.0019	mg/l	1 X Monthly	24-Hour Composite

Parameter	Daily Minimum	Daily Maximum	Units	Minimum Frequency	Sample Type
pH	6.0	9.0	Std Units	1 X Weekly	Grab

### 6.2 Schedule of Compliance

The circumstances in this NPDES permit do not qualify for a schedule of compliance.

### 6.3 Special Conditions and Other Permit Requirements

There are no special conditions on this permit.

## **6.4 Spill Response and Reporting Requirement**

Reporting requirements associated with the Spill Reporting, Containment, and Response requirements of 327 IAC 2-6.1 are included in Part II.B.2.(d), Part II.B.3.(c), and Part II.C.3. of the NPDES permit. Spills from the permitted facility meeting the definition of a spill under 327 IAC 2-6.1-4(15), the applicability requirements of 327 IAC 2-6.1-1, and the Reportable Spills requirements of 327 IAC 2-6.1-5 (other than those meeting an exclusion under 327 IAC 2-6.1-3 or the criteria outlined below) are subject to the Reporting Responsibilities of 327 IAC 2-6.1-7.

It should be noted that the reporting requirements of 327 IAC 2-6.1 do not apply to those discharges or exceedances that are under the jurisdiction of an applicable permit when the substance in question is covered by the permit and death or acute injury or illness to animals or humans does not occur. In order for a discharge or exceedance to be under the jurisdiction of this NPDES permit, the substance in question (a) must have been discharged in the normal course of operation from an outfall listed in this permit, and (b) must have been discharged from an outfall for which the permittee has authorization to discharge that substance.

## **6.5 Permit Processing/Public Comment**

Pursuant to IC 13-15-5-1, IDEM will publish the draft permit document online at <https://www.in.gov/idem/public-notices/>. Additional information on public participation can be found in the "Citizens' Guide to IDEM", available at <https://www.in.gov/idem/resources/citizens-guide-to-idem/>. A 30-day comment period is available to solicit input from interested parties, including the public.